JANUARY 21, 1954

ENGINEERING NEWS-RECORD

$8.00 A YEAR

EIGHTIETH YEAR OF PUBLICATION

★ RECORD SPAN PRESTRESSED GIRDERS

★ RIVERBANK EROSION CONTROLLED

A McGRAW HILL PUBLICATION

E B POWER
UNIVERSITY MICROFILMS I
313 N 1 ST
ANN ARBOR MICH

ENGINEERING REPORTS:

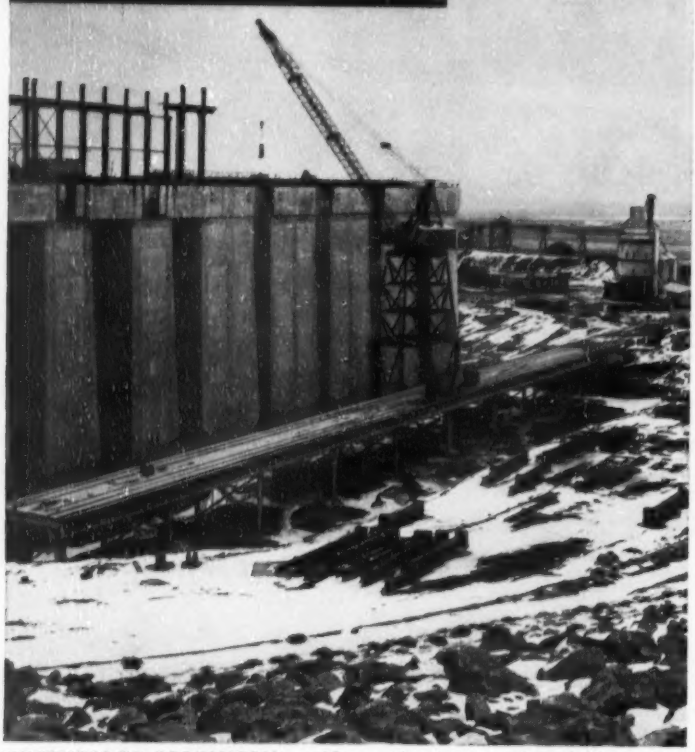

ELECTRICAL CO-ORDINATION provides continuous operation of this revolver crane 100 feet above the base of the huge intake structure. Movement along trestle is powered by a G-E 200-hp Type MR motor at foot of the gantry.



ADEQUATE POWER to maintain smooth, dependable crane performance is stepped down by these portable G-E transformers.



RELIABLE DRIVES must stand exacting demands of this revolver crane. G-E 200-hp motors and control are key to this application.

Electricity helps Garrison Dam keep round-the-clock schedule

G-E drives, still on the job after six years, are helping to harness Missouri River

At Garrison Dam near Bismarck, N. D., completely electrified equipment plays a vital role in keeping round-the-clock construction work on schedule. All electrical systems for the project's main stages were designed and co-ordinated by U. S. engineers, Peter Kiewit and Son Co., and Morrison-Knudsen Co. contractors—aided by G-E application engineering. This engineering teamwork resulted in maximum working capacity and fast, smooth operation.

Let G-E application engineers help *you* get the most from your construction equipment through electrification—from the smallest drive to the largest power distribution system. Contact your nearest G-E Apparatus Sales Office. General Electric Co., Schenectady 5, New York.

664-31

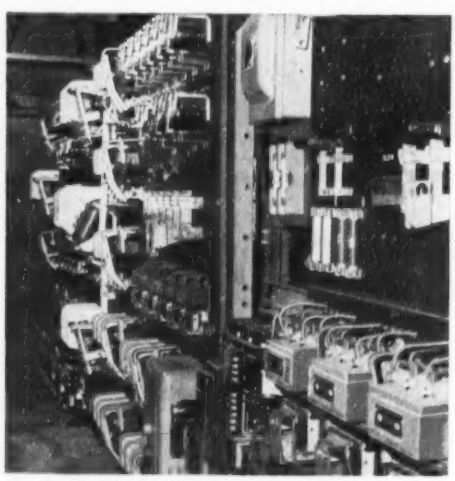

CENTRALIZED CONTROL equipment on this compact G-E panel is mounted in the cab for simple one-man operation.

Engineered Electrical Systems for Heavy Construction

GENERAL ELECTRIC

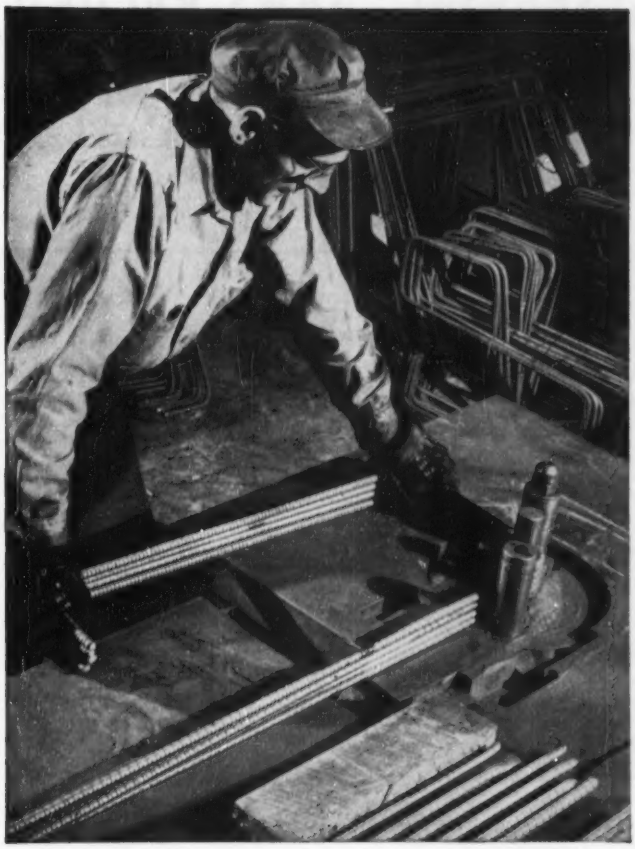

BARS

...fabricated as you want them

...shipped when you want them

When you order reinforcing bars from Bethlehem, you can have them bent, or cut, or shaped any way you want. What's more, you can be sure that they'll reach the job promptly, so that construction can proceed on schedule.

Bethlehem has had years of experience in furnishing reinforcing steel to contractors. We can ship the bars from whichever of our eleven completely equipped fabricating shops throughout the country is nearest to your job site. That can save a lot of valuable time!

Bethlehem Bars come in size ranges from Numbers 3 to 11. They're all made from new-billet steel, with deformations which meet ASTM Specification A-305. After fabricating, they are bundled and tagged, with bar lists included. They reach you ready for placing.

11 Fabricating Shops at Your Service

Boston	**Baltimore**	**St. Paul**
New York	**Buffalo**	**Los Angeles**
Philadelphia	**Chicago**	**San Francisco**
Johnstown, Pa.		**Seattle**

BETHLEHEM STEEL COMPANY

BETHLEHEM, PA.

BETHLEHEM STEEL

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. *Export Distributor:* Bethlehem Steel Export Corporation

Bethlehem REINFORCING BARS

ARE YOU DATED?

ARE YOU still plodding along with a "horse & buggy" surveying instrument?

PROGRESSIVE SURVEYORS use modern WILD instruments for matchless precision and operational speed ... for Substantial MAN-HOUR SAVINGS!

★ ★ ★

Set Yourself "Up to DATE"

MAKE A DATE WITH OUR DEMONSTRATION STAFF to handle a modern WILD instrument. We will arrange to show you the unmatched performance of WILD Transits, Theodolites, Levels and other surveying equipment...**In action under field conditions.**

★ ★ ★

® WILD HEERBRUGG has THE MOST SUITABLE modern surveying instrument for your specific job or for universal application. WILD instruments are known throughout the world for:

- ★ Ease and speed of handling
- ★ Fool-proof design and maximum reliability
- ★ Lasting trouble-free operation
- ★ Light-weight, rugged construction
- ★ Simplicity of collimation and level vial adjustments

See For Yourself! Contact Dept. EN 121

MAKE A DATE WITH WILD...the world's largest manufacturer of precision surveying instruments.

Extensive repair and servicing facilities by factory trained specialists.

HENRY WILD
SURVEYING INSTRUMENTS SUPPLY CO.
OF AMERICA, INC.
MAIN & COVERT STS., PORT WASHINGTON, N. Y.
POrt Washington 7-4843

ENGINEERING NEWS-RECORD

ABP Member ABC

Editorial offices: 330 W. 42nd St., New York 36, Tel. LOngacre 4-3000

Number of copies of this issue printed: 61,278

Contents on page 17

Waldo G. Bowman
Editor

E. E. Halmos Jr. ..... *Managing Editor*
J. J. Christie ..... *Asst. Managing Editor*
V. T. Boughton ..... *Transportation, Power*
F. S. Merritt ..... *Architectural, Structural*
R. H. Dodds ..... *Contracting, Heavy Construction*
S. C. Jensen ..... *Materials and Equipment*
A. J. Fox Jr. ..... *Hydraulics, Water Supply, Sanitation*
G. T. Orick ..... *Labor, Men and Jobs*
J. P. Chamberlain ..... *Business and Finance*
R. W. O'Neill ..... *International, National Affairs*
J. R. Owen ..... *Municipal*
J. R. Carr ..... *Midwest (Chicago)*
L. L. Wise ..... *West (San Francisco)*
N. A. Bowers ..... *Consultant (San Francisco)*
Elsie Eaves ..... *Business News Department*
J. H. Webber ..... *Economics*
J. A. Mahoney, M. O. Wetzel ..... *Construction Reports*
M. W. Roessler, E. R. Huber, Dori Weiss ..... *Statistics, Costs, Prices*
H. G. Compton ..... *Photography*
M. V. Leggiero ..... *Makeup*
T. D. MacGregor, B. J. Lamb, B. B. Bagley ..... *Copy, Rewrite*
L. T. Tarpey, J. C. Greenough ..... *Printing*

Washington News Bureau, Room 1189 National Press Building: G. B. Bryant, Jr., *Manager*, Glen Bayless, A. E. Adams, Jay Flocken, Boyd France, Sam Justice, W. H. Kearns, J. L. Kent, Craig Lewis, D. O. Loomis, Jesse Mock, Gladys Montgomery, A. L. Moore, M. A. Reichek, Caroline Robertson, V. B. Smith.

Domestic News Bureaus: Atlanta, 1321 Rhodes-Haverty Bldg., E. D. White; **Cleveland,** 1510 Hanna Bldg., R. A. Cochran; **Detroit,** 856 Penobscot Bldg., J. C. Jones Jr.; **Houston,** 1303 Prudential Bldg., J. A. Lee; **San Francisco,** 68 Post Street, M. C. Ralston; **Los Angeles,** 1111 Wilshire Blvd., John Shinn; **Seattle,** 6040 Fifth Ave., N.E., Ray Bloomberg.

Correspondents: Albany, Albuquerque, Augusta, Me., Austin, Boston, Boulder, Baltimore, Birmingham, Bismarck, Charleston (W. Va.), Charleston (S. C.), Columbus, Cincinnati, Cleveland, Chicago, Cheyenne, Dallas, Denver, Detroit, Durham, Harrisburg, Helena, Houston, Hartford, Indianapolis, Jackson, Miss., Jacksonville, Jefferson City, Kansas City (Mo.), Lansing, Lincoln, Little Rock, Miami, Memphis, Minneapolis, Montgomery, Milwaukee, New Orleans, Norfolk, Omaha, Oklahoma City, Philadelphia, Pittsburgh, Portland (Ore.), Providence, Phoenix, Pierre, St. Louis, Schenectady, Syracuse, St. Paul, Seattle, Salt Lake City, Spokane, Topeka, Trenton, Wilmington. **Canada:** Montreal, Toronto, Ottawa, Victoria, Regina.

Foreign News Bureaus: J. K. Van Denburg, Jr., **New York;** G. W. Schroder, **Frankfurt;** Nathaniel McKitterick, **London;** Herbert Leopold, **Manila;** John Wilhelm, **Mexico City;** Ross Hazeltine, **Paris;** A. W. Jessup, Tokyo; L. I. Holmes, **Sao Paulo. Correspondents:** Amsterdam, Athens, Bangkok, Bogoto, Bombay, Brussels, Buenos Aires, Caracas, Copenhagen, Geneva, Havana, Helsinki, Johannesburg, Lima, Madrid, Melbourne, Oslo, Rome, Stockholm, Sydney, Tehran, and 21 other principal cities and countries.

Robert F. Boger
Publisher

January 21, 1954 ENGINEERING NEWS-RECORD Vol. 152, No. 3

Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y. Donald C. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Engineering News-Record—Subscription Service, 99-129 North Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons with an identifiable commercial or professional interest in construction and building. Position and company connection must be indicated on subscription orders.

Single copies 35¢. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $8.00 a year; $12.00 for two years; $16.00 for three years. Other Western Hemisphere countries, $15.00 a year; $25.00 for two years; $30 for three years. All other countries, $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter October 29, 1936, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A.

Copyright 1954 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

Height of the fire

at two chemical plants

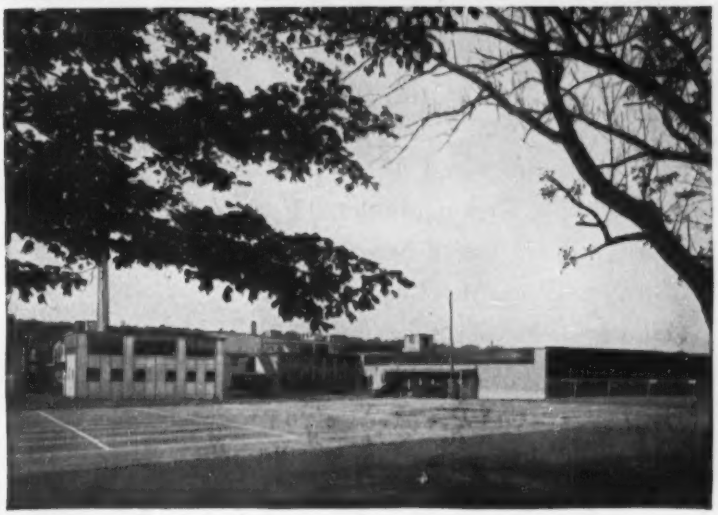

One plant is a seething inferno. Several were injured in this $600,000 mid-western chemical fire.

How different the story at the other chemical plant. When fire broke out at Arnold Hoffman & Company, Inc., Dighton, Mass., there was no rapid spread of flames. No one was injured. The blaze was confined to a single area of the plant and the damage was negligible.

What did the Arnold Hoffman plant have which the other chemical plant did not have? The protection of a Grinnell Automatic Sprinkler System!

There is a Grinnell Fire Protection System for every fire hazard. These systems provide for the effective control of fire — *at its source.*

Remember, a Grinnell System often pays for itself in a few years through reductions in insurance premiums. So if you have fire insurance, you are probably paying for Grinnell Protection anyway . . . *why not have it!*

A Grinnell engineer will gladly advise you on the proper Grinnell System to protect *your* property. Write Grinnell Company, Inc., 258 West Exchange Street, Providence, Rhode Island.

HERE IS A PARTIAL LIST OF THE DIFFERENT FIRE PROTECTION SYSTEMS WHICH GRINNELL CAN ENGINEER TO FIT *YOUR* PARTICULAR NEED . . .

- ***Standard Wet-Pipe Sprinkler System.*** Where temperatures remain above freezing.
- ***Standard Dry-Pipe Sprinkler System.*** Where temperatures may go below freezing.
- ***Multitrol System.*** For faster application of water in extra hazardous areas.
- ***Textile Opener Room System.*** For flash fires in opened cotton bales.
- ***Mulsifyre System.*** For fires in heavy as well as in medium oils.
- ***ProtectoSpray System.*** For fires in light and medium oils — many special hazards.
- ***ProtectoFoam System.*** For fires in gasoline and other highly flammable liquids.
- ***FlameBuster Portable Hose Nozzle.*** For oil fires — also for class A fires.

GRINNELL

PROTECTION AGAINST EVERY FIRE HAZARD

Manufacturing, Engineering, and Installation of Automatic Sprinklers Since 1878

"We're Proud OF OUR ERIE STRAYER BULK PLANT"

SAYS SUP'T. STONEBRAKER OF A. J. GLASER COMPANY, MUNCIE, INDIANA

"And why shouldn't we be! We knock it down, move it and set it up all in 3 days. Makes a perfect setup for truck mixers, too!"

●

Continues Mr. J. H. Stonebraker, "We know Erie equipment. For the past 7 years we've been using their Strayer Portable Concrete Mixing Plant. Our experience with this unit prompted us to buy the Erie Strayer Bulk Cement Plant. We're more than satisfied with the installation."

Important as it is, quick knock-down and set-up aren't the only advantages our owners get out of their Erie Strayer Plants. Other features are: accurate, high output plants and fast service on repair parts.

If you're thinking about a portable batching or mixing plant, don't decide till you get the Erie Strayer story. Learn for yourself why most Erie owners repeat with Erie Strayer equipment when expanding.

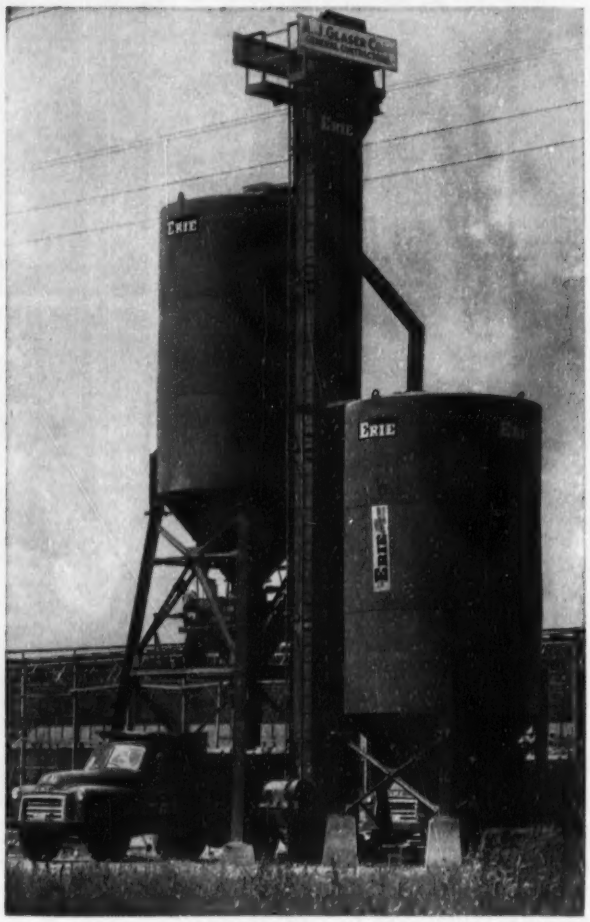

Glaser's installation includes: 2 CSB silos with a total capacity of 900 bbls; a 20 cu. ft. Cemetor (type DWH) with approximate capacity of 2400 cu. ft. per hour; and, a 50-TPH Elevator. One man handles entire operation. Sold by Seastrom and Company, Indianapolis, Indiana.

Cable Address: EXIMPORT. *Write for* Booklet GS, Dept. R14

FORMERLY ERIE STEEL CONSTRUCTION COMPANY

ERIE STRAYER CO.

SAME PEOPLE • SAME PRODUCTS • JUST A NEW NAME

214 GEIST RD. ERIE, PENNSYLVANIA

B.F.Goodrich

"Universal tread prevents side-slip," construction foreman reports

THE Kessler Contracting Company does road construction work around Mount Carmel and Shamokin, Pennsylvania. Thirty trucks, 6 scrapers and 6 other units haul loads as heavy as 20 tons over hilly, rut-filled roads where tire skidding and side-slippage is a constant threat.

To avoid this danger, Kessler uses B. F. Goodrich off-the-road tires. Foreman Rufus Steiger (above, right) reports they prevent side-slip, give much better service than any other make of tire.

The B. F. Goodrich Universal tire grips with husky, wedge-shaped cleats. The cleats are non-directional to give positive traction in reverse or forward and to guard against slippage. You pull through the toughest jobs without wasting time and money on bogged-down trucks. And the tread is made of specially-compounded rubber that resists cuts and snags.

Kessler is able to recap its BFG tires twice—each recap saving the company hundreds of dollars—because of the extra-strong construction. Layers of strong, elastic nylon cords under the tread stretch together to protect the tire body from shocks and bruises. This patented nylon shock shield costs you nothing extra, yet gives you more original tire service, more recappable tires and more hours of service per recap, increased bruise resistance and less danger of tread separation.

See the complete money-saving line of B. F. Goodrich off-the-road tires at your retailer's store. The address is listed under Tires in the Yellow Pages of your phone book. Or mail the coupon.

Specify B. F. Goodrich tires when ordering new equipment

The B. F. Goodrich Company
Tire and Equipment Division
Department TO-357, Akron 18, Ohio

Please send me:

☐ Free catalog on B. F. Goodrich off-the-road tires

☐ Free booklet, "How to get more recaps of truck tires"

☐ Name of my nearest retailer.

Name_____

Company _____

Street_____

City_____ Zone____ State_____

Under Philadelphia's new Pennsylvania Railroad Express Terminal ...

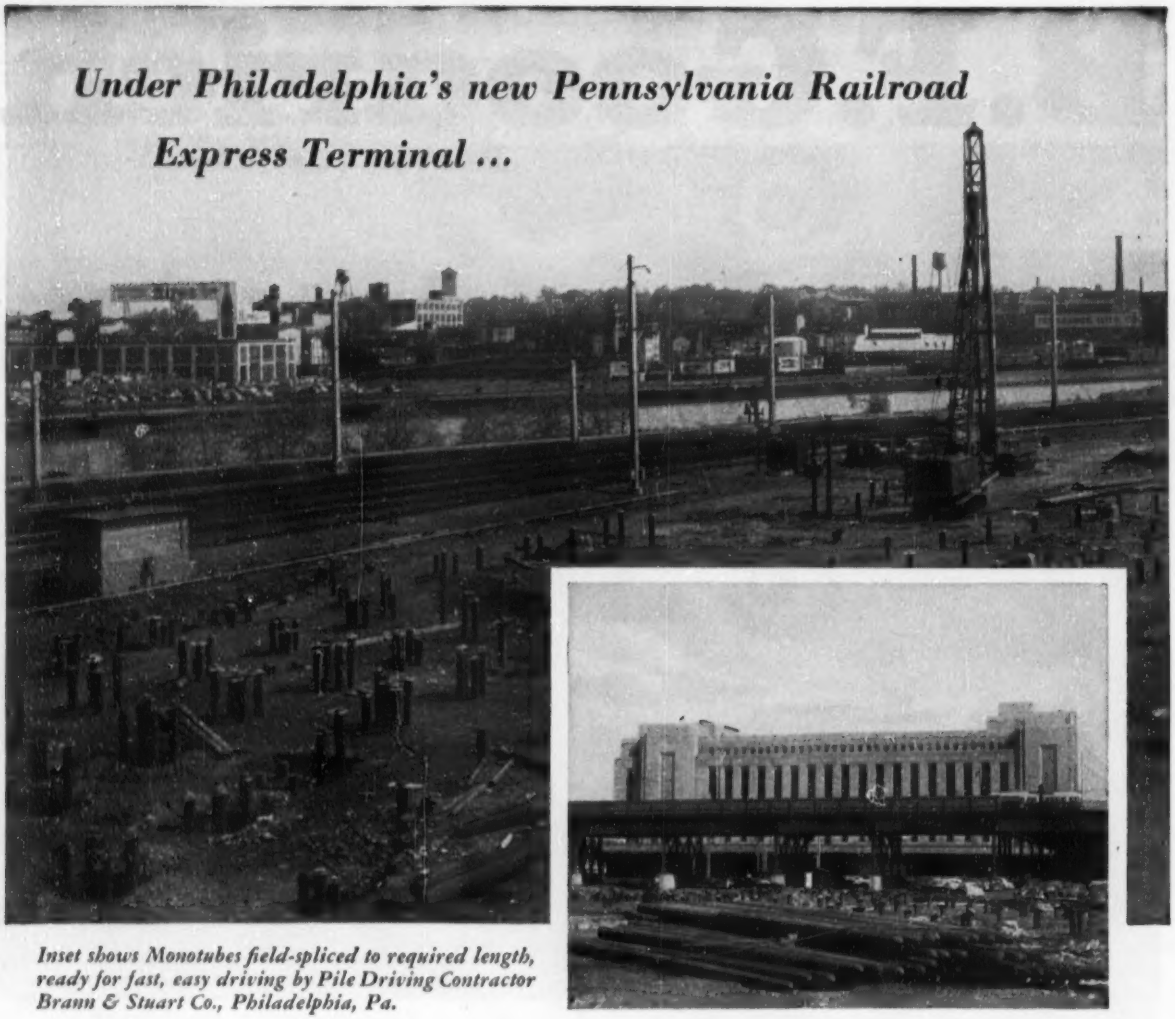

Inset shows Monotubes field-spliced to required length, ready for fast, easy driving by Pile Driving Contractor Brann & Stuart Co., Philadelphia, Pa.

JOB SIMPLIFICATION with Monotube Piles

30,000 lineal feet of Monotube piles will support the new Pennsylvania R.R. express facilities in Philadelphia—a two-story, reinforced concrete building 150′ x 60′ and a reinforced concrete platform 825′ x 100′ covered by a steel superstructure. Standard Monotube piles of 11 gauge steel with 8″ tip and 12″ butt diameter were used. The piles averaged 48′ in length.

Job simplification started with easy, on-the-job weld-splicing to extend the piles to required length. Even more important, Monotubes' light weight combined with cold-rolled strength meant easy handling and fast driving using only a light crawler crane. Finally, it was no problem to drive Monotubes plumb, without distortion, and with the added assurance of top-to-bottom visual inspection after driving.

Weigh these and other Monotube advantages. They pay off well on *all* types of jobs. For the latest information write to The Union Metal Manufacturing Co., Canton 5, Ohio, for a copy of Catalog No. 81.

Monotube Foundation Piles

UNION METAL

PREFORMED INTERNALLY LUBRICATED

Wire Rope

for cranes, hoists, elevators, and all equipment

From Macwhyte's complete line of a thousand and one sizes and types, you get the right rope for your equipment. Thoroughly lubricated, PREformed, engineered to give long, low-cost service. *Send for Catalog G-15.*

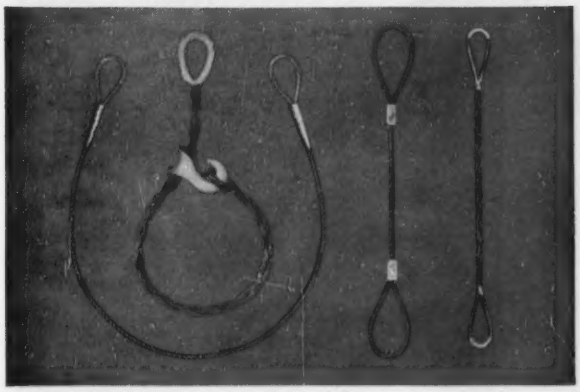

WIRE ROPE

Slings

for lifting and moving materials, equipment in production or maintenance

There are hundreds of types and sizes of Macwhyte Round-Braided, Flat-Braided, Single-Part, and Grommet Slings. All are custom made in length, capacity, and flexibility to meet your needs. *Send for Catalog S-8.*

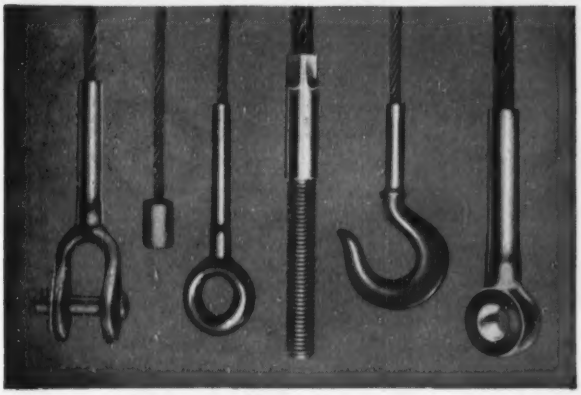

WIRE ROPE

Assemblies

for machine parts, controls, and operating devices

Macwhyte Safe-Lock wire rope assemblies are made to order in length, strength, and flexibility desired. Terminals are permanently attached to one or both ends. There are many standard types. *Send for Catalog 5201.*

MACWHYTE

1083 5W

These catalogs available on request

MACWHYTE COMPANY
2930 Fourteenth Avenue - Kenosha, Wisconsin

Mill depots: New York • Pittsburgh • Chicago
St. Paul • Fort Worth • Portland
Seattle • San Francisco • Los Angeles
Distributors throughout U.S.A.

THE SHOW MUST GO ON

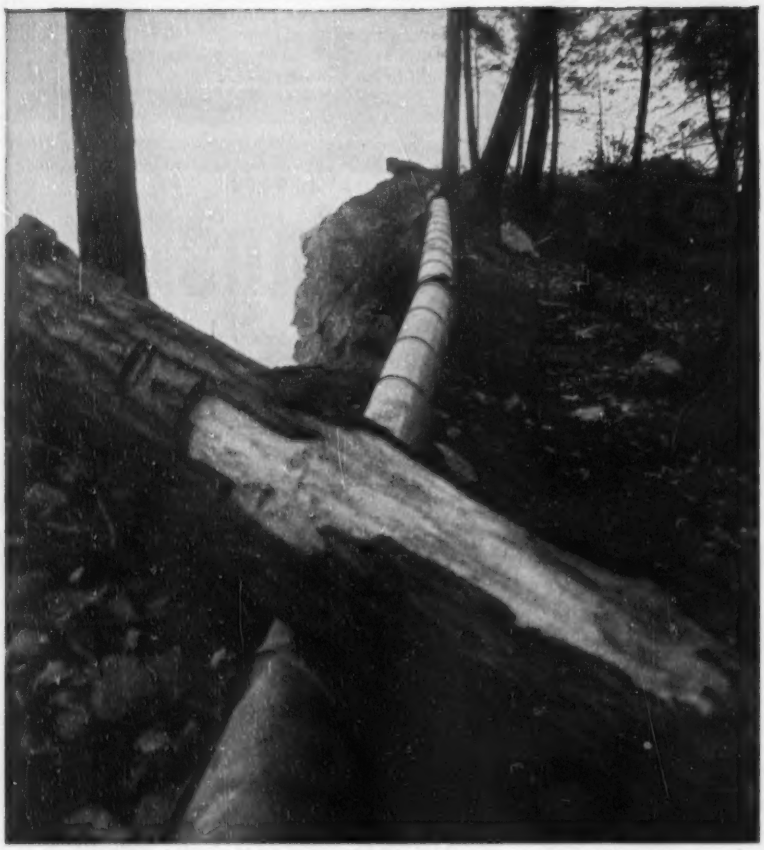

In the theatre of construction, Naylor light-weight pipe is constantly proving its performance ability. Take this scene from the building of the New York Thruway showing a line of 8-inch Naylor pipe feeding air to rock drills. Despite the constant battering from flying rock and the terrific impact of a fallen tree, there's no interruption in the lines and the show goes on. If this is the kind of performance you need for your jobs, write for Bulletin No. 507 and get the complete story.

NAYLOR PIPE

Naylor Pipe Company • 1248 East 92nd Street, Chicago 19, Illinois

Eastern U.S. and Foreign Sales Office: 350 Madison Avenue, New York 17, New York

READER COMMENT

Bridge accidents

SIR: Accidental destruction of bridges by highway vehicles has frequently occurred because the structures were not anchored for, or protected against, the impact of vehicles moving out of control.

The bridge design specifications of the German Railways have required, since Feb. 1, 1934, that, unless suitable fenders are provided, a force of 220,460 lb should be applied 3.94 ft above the sidewalk level, at both axes of symmetry of the section, in the design of columns supporting undercrossings. The effects of this force are additional to those of the design loads, except wind. The yield stress is allowed for this loading combination.

Providing fenders against ship impact has been standard practice. Likewise, the protection of columns and the end-posts of trusses against vehicle impact should be specified. The provision of excess sections and special anchorages may not be as efficient as energy absorbing installations. The latter are suitable for the protection of existing structures.

LOUIS BALOG
Consulting Engineer
Binghamton, N. Y.

Canal sector gates

SIR: Your readers may be interested to know that the sector gates of the Algiers lock described in the Nov. 26 issue of ENR, p. 42, are not the first of their type built in this country.

During the 1930s, sector-type gates were constructed by the Okeechobee Water District in the Everglades of southern Florida. These were successful in reducing turbulence in the lock chamber by passing the major portion of the water entering the structures through recesses constructed behind the pintles. However, both the direct and reverse heads on these sector gates were relatively low compared with those encountered on the lower Mississippi River.

The Florida sector-gate designs and actual test-run results were used by the New Orleans District of the period 1937-40 in the design of partial locks at Berwick and Charenton, La., on the Intracoastal Waterway and for the Bayou Sorrell Lock on the alternate route of the Intracoastal Waterway south of Plaquemine. The latter structure was designed for the New Orleans District by the Upper Mississippi River Division.

(*Continued on page 12*)

STEEL DECK . . .

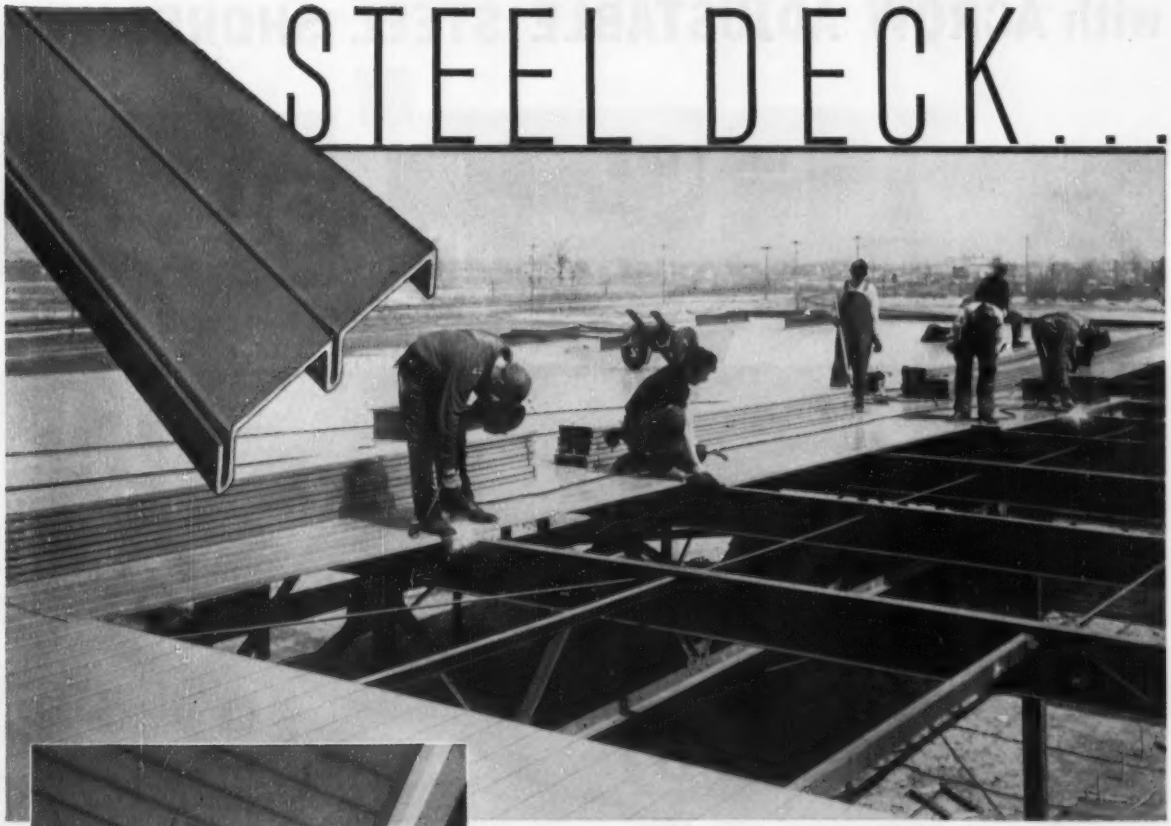

BUILT-UP SADDLES ELIMINATED

Built-up saddles are eliminated in Steel Deck Roofs. Purlins can be set to create valleys at sump locations in the drainage area. Steel Deck can be warped to conform. No additional deck plates are required—no cutting, fitting or bending necessary.

Protects a Greater Percentage of New Construction Year After Year!

Steel Deck continues to gain favor in the industrial and commercial building fields. Why? . . . because steel deck is the logical and most practical deck material available for roof construction today. And it's more economical, too. Steel Deck's light weight permits substantial savings in the supporting structure . . . it can be insulated to the exact degree to meet local "U" Factor requirements—total dead roof load, including insulation and waterproofing materials, will prove to be less than any other type of permanent, firesafe roof construction in any given locality. And, important too, Steel Deck can be installed in any kind of weather . . . erection progresses rapidly—no waiting for materials to dry. Mahon Steel Deck is available in Galvanized Steel, Enamel Coated Galvanized Steel, or Enamel Coated Black Steel. Stiffening ribs are vertical—no angular or horizontal surfaces where troublesome dust may accumulate. In the enamel coating process, the metal is chemically cleaned, phosphated, and treated with a chromic acid solution to provide paint bond, and the protective coating of synthetic enamel is baked on at 350° F. prior to roll-forming. Investigate these extra-value features of Mahon Steel Deck . . . See Sweet's Files for complete information, or write for Catalog B-54-A.

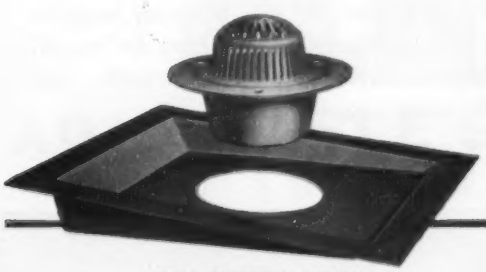

SUMP RECESSES and SUMPS

Mahon Roof Sump Recesses for use with Mahon Steel Deck can be furnished to fit any roof pitch. Mahon Cast Iron Sumps can also be furnished for 4", 5", and 6" conductors.

THE R. C. MAHON COMPANY

Detroit 34, Michigan • Chicago 4, Illinois • Representatives in all Principal Cities

Manufacturers of Steel Deck for Roofs, Partitions, and Permanent Concrete Floor Forms; Insulated Metal Walls of Aluminum, Stainless or Galvanized Steel; Insulated Metal Wall Panels; Rolling Steel Doors, Grilles, and Underwriters' Labeled Rolling Steel Fire Doors and Shutters.

MAHON

with ACROW ADJUSTABLE STEEL SHORES, You...

GET 'EM

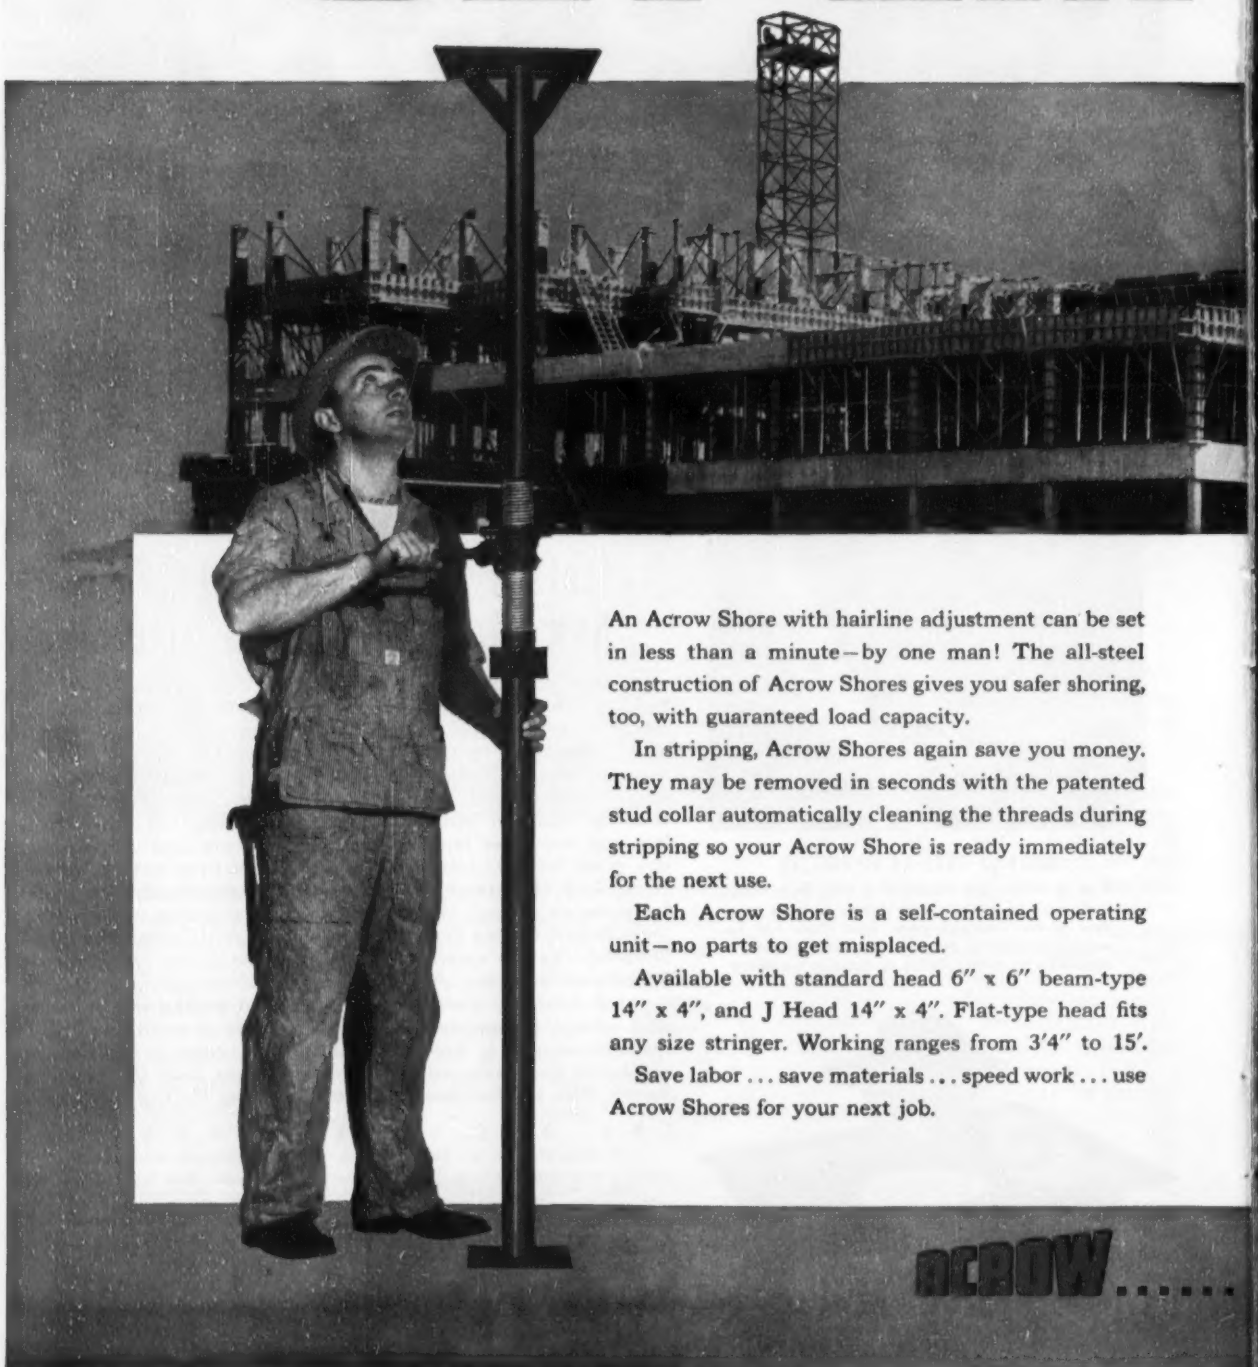

An Acrow Shore with hairline adjustment can be set in less than a minute—by one man! The all-steel construction of Acrow Shores gives you safer shoring, too, with guaranteed load capacity.

In stripping, Acrow Shores again save you money. They may be removed in seconds with the patented stud collar automatically cleaning the threads during stripping so your Acrow Shore is ready immediately for the next use.

Each Acrow Shore is a self-contained operating unit—no parts to get misplaced.

Available with standard head 6" x 6" beam-type 14" x 4", and J Head 14" x 4". Flat-type head fits any size stringer. Working ranges from 3'4" to 15'.

Save labor . . . save materials . . . speed work . . . use Acrow Shores for your next job.

ACROW.....

UP FAST

Memorial Hospital, Dallas, Texas, built by Robert E. McKee, General Contractor, Inc., at approximate cost of $10,000,000. Mr. C. Brown, superintendent, used Acrow Shores on this project.

Write for free Bulletin today!

ACROW, INC.
Dept. EN-1-D
510 North Dearborn Street
Chicago 10, Illinois

UNITED STATES OFFICES

Chicago, MIchigan 2-1010
New York, LExington 2-7595
Boston, DEvonshire 8-7174
Philadelphia, LOcust 7-5553
Atlanta, Emerson 3716
Houston, Underwood 8514
Dallas, Riverside 6051
Birmingham, 7-5151
Los Angeles, DAvenport 6-1428
San Francisco, ATwater 2-1442

ASSOCIATE COMPANIES

Acrow (Canada) Ltd., Montreal
Acrow Venezuela, S.A., Caracas
Acrow Brazil, S.A., Rio de Janeiro
Acrow Uruguay, S.A., Montevideo
Acrow Argentina, S.A., Buenos Aires
Acrow Peru, S.A. (Ingenieros), Lima
Acrow (Engrs.) Ltd., London
Acrow Engrs. (Pty.) Ltd., Johannesburg
Acrow Engrs. (Pty.) Ltd., Sydney

ACROW

ADJUSTABLE STEEL SHORES

THE WORLD'S LARGEST SELLING SHORE

RIP FROZEN GROUND

with an **ESCO** BUCK FORTE **DOZER-ROOTER**



Dozer-Rooter easily adjusts to four rooting depths — 9", 15", 21" or 27".

an easy, low-cost way to avoid deep-frost headaches...

Put more profit in your winter operations with an *ESCO* Dozer-Rooter. Easily installed on a straight or angle dozer in a few minutes, it rips through hard-frozen ground quickly, economically. No need for blasting or thawing ground. The Dozer-Rooter costs less to own, less to operate and out-performs conventional rippers. It is portable enough to carry on the tractor or in a pickup truck. When ripping frozen ground, rock, concrete or asphalt, you have tractor maneuverability on narrow streets or confined areas—easy, efficient operation on steep slopes.

Precision control of the Dozer-Rooter permits safe operation around installations such as pipes, cables and footings.

Put more profit in your operation *the year around* with an *ESCO* Dozer-Rooter. Ask your *ESCO* dealer for a demonstration or write for Booklet 194-A.

ESCO Offices and Warehouses: Honolulu, Hawaii; Houston, Texas; New York, New York; Los Angeles, San Francisco, California; Seattle, Spokane, Washington; Centralia, Pennsylvania; Eugene, Medford, Oregon; Salt Lake City, Utah. In Canada: Vancouver, B. C., and Toronto, Ontario.

ELECTRIC STEEL FOUNDRY CO.

2167 N. W. 25th AVENUE, PORTLAND 10, OREGON 712 PORTER ST., DANVILLE, ILL.

READER COMMENT

Construction of the Berwick and Charenton floodgates was left during World War II partially finished. After the war, the Berwick structure was expanded and completed as a lock; the Charenton floodgate was completed, and contracts awarded for construction of the Bayou Sorrell Lock and for partial locks at East and West Calumet, the junction of the Intracoastal Waterway and the Wax Lake Outlet, a few miles west of Morgan City and Berwick.

All of these structures are sector-gate types as are several others which were planned for construction after the war, such as Port Allen lock near Baton Rouge, La., the Bayou Boeuf lock near Morgan City, La., the Grand Lake Ridge lock south of Lake Charles, and the Grand Chenier lock and control structure.

The above named structures were forerunners of the Algiers lock and together with model studies and experiments developed by the Waterways Experiment Station at Vicksburg, Miss., presumably were used as a basis for its design.

JOSEPH J. ROSA
Eatontown, N. J.

[EDITOR'S NOTE: As stated by Mr. Rosa, the gates of the Algiers lock are an outgrowth of earlier studies of this type, which in turn were based on Swedish designs, as noted in the article on the Algiers gates, which are noteworthy for the large reduction in turbulence that has been obtained by major improvements over the earlier designs.]

Code may be amended

SIR: Your article, "Code confusion: It hampers wall design," (ENR Dec. 24, 1953, p. 21) may spur some building officials to make another attempt to have panel-wall construction considered by governing bodies.

We expect to re-introduce a bill before the Board of Aldermen within the next few weeks to amend our building code to make panel-wall construction permissible in St. Louis. A previous bill introduced about two years ago died for lack of support.

A. H. BAUM
Building Commissioner
City of St. Louis, Mo.

Comment on Paducah

SIR: For three long painful years we have been struggling with a fantastic labor situation in the Paducah area. We have, through powerful exposure,

(*Continued on page 15*)

(ADVERTISEMENT)

THIS PREFABRICATED SCAFFOLDING SERVES FOUR TRADES

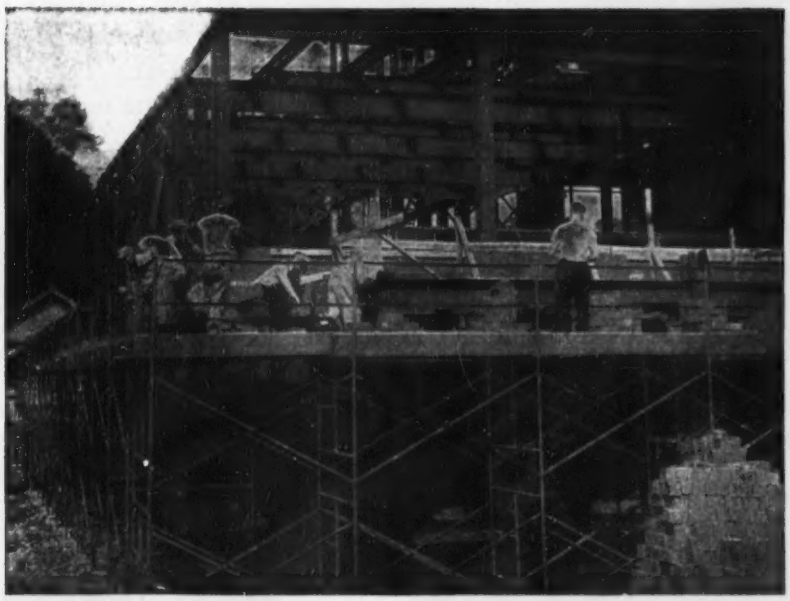

NEW YORK MASONS

work on new power plant building at the State Hospital in Middletown, N. Y. L. B. Strandberg and Sons Co., Inc., Chicago general contractor, purchased the "Trouble Saver" Sectional Steel Scaffolding used on this job. The 5-ft high mason-type frames shown here in use are designed to provide a convenient, multi-level scaffold with a maximum number of sidewall bracket positions for masons' use. "Trouble Saver" Scaffolding, described in free Bulletin PSS-24, is one of the many types of scaffolding offered by PS Co.—the only complete line for every job, big or small. Be sure of the right equipment for your job — follow the practice of experienced contractors and—*when it comes to scaffolding, come to PS.*

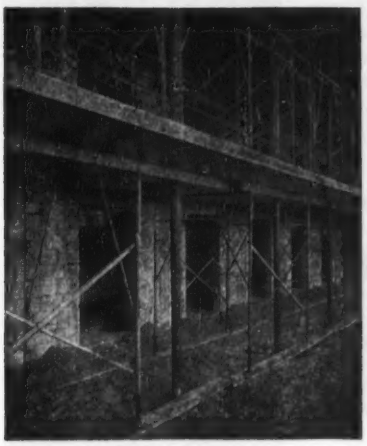

MIAMI SHORES—

For the Blue Horizon Hotel's new cabanes, Florida contractor Morris Burk cut concrete shoring costs by using "Trouble Saver" Sectional Scaffolding and I-beams set directly on scaffolding frames. Plywood panels were laid on I-beams without fastening. The new technique eliminates framing, also ends stripping. "Trouble Saver" Scaffold used: 52 5x5-ft deep-trussed end frames, 20 6½-ft shallow-trussed end frames, 72 6½-ft deep-trussed end frames, 288 plain bases, 288 20-in. adjustable extension legs; 120 5-in. I-beams.

RENOVATION IN ILLINOIS—

Removal of old cornices, installation of new stone copings and a new synthetic granite front, replacing of windows and painting the upper floors of the 8-story building at 12-22 North Michigan Ave., Chicago, required this big "Trouble Saver" Scaffold. To erect the 92-ft high scaffold, The Patent Scaffolding Co.'s Chicago office supplied 315 pre-fabricated scaffold frames to Enjay Construction Company. Here workmen are removing the old cornice preparatory to installing a simple stone coping.

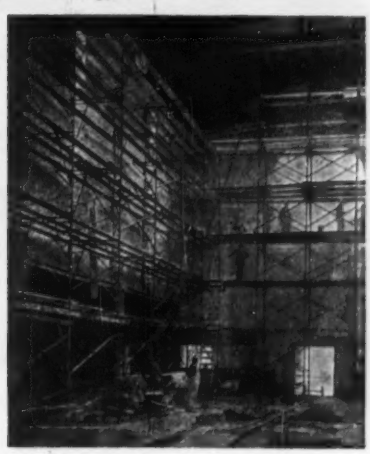

PORTLAND PLASTER

contractors Cann & Gray rented this five-level "Trouble Saver" Sectional Steel Scaffolding structure to safely speed plastering of a new church at S. E. 18th and Division Streets in Portland, Ore. This "Trouble Saver" assembly employed shallow-trussed end frames, 6½ ft high, giving workmen ample headroom when walking along the scaffold platforms. Also note the "Trouble Saver" Scaffolding sidewall brackets, employed here for extra platform working area for plasterers.

FOR GREATER SAFETY...EFFICIENCY...ECONOMY

GOLD MEDAL® THE PATENT SCAFFOLDING CO., INC.

38-21 12th Street Dept. ENR Long Island City 1, N. Y.
West Coast: 6931 Stanford Ave., Los Angeles 1, Calif.
Branches in all principal cities

To help you solve any scaffolding problem, PS offers a complete nation-wide engineering service—available locally. See the Yellow Pages in your 'phone book for the nearest Patent Scaffolding office or representative handling "Gold Medal" Scaffolds.

3 reasons

...To Choose Connors Steel Reinforcing Bars

There's a reason for everything—and at least three good reasons to select Connors steel reinforcing bars on your next construction project. These and other advantages are among the reasons more people are turning to Connors for reinforcing steel—

Balanced Inventory–Connors' modern rolling mills are highly flexible which means we can maintain a balanced inventory at all times. Connors' fabricating shop in the same building with rolling mills means no time is lost shipping to fabrication shops.

Connors Bars Fit–Cut to proper lengths, bent to fit job requirements and metal tagged for quick identification, Connors bars fit your job.

Excellent Transportation–Connors' ready access to excellent truck and rail transportation facilities also means faster delivery to your job site.

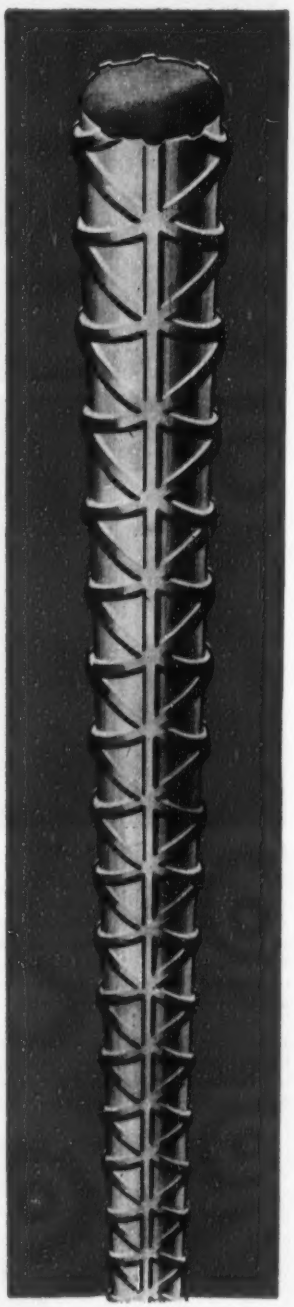

CONNORS PRODUCTS:
Concrete Reinforcing Bars • Hot Rolled Strip • Merchant Bars • Special Sections

CONNORS STEEL DIVISION
H. K. PORTER COMPANY, INC.
OF PITTSBURGH
P. O. BOX 2562 • BIRMINGHAM, ALA.

READER COMMENT

no doubt, stored up some knowledge of the situation and have come to many conclusions.

One conclusion is that 99% of the visiting writers here to pass judgment on our labor and community troubles, go home and turn out a batch of warped sentences which they, in all sincerity, probably, label as "The Truth At Paducah."

Your mazagine did the opposite of that (ENR Nov. 19, 1953, p. 21). We have never read a better Paducah labor story. It was a penetrating, thorough, unbiased and accurate job of reporting. We are grateful for the privilege of reprinting the story in full, with credit to Mr. Orick and ENGINEERING NEWS-RECORD.

Reaction to the story has been very good.

If we can be of any service to ENGINEERING NEWS-RECORD, feel free to call on us at any time.

EDWIN J. PAXTON
Publisher
The Paducah Sun-Democrat

CALENDAR

Conference on Prestressed Concrete, University of Toronto, Toronto, Ont., Jan. 28-29.

Associated Equipment Distributors, Waldorf Astoria Hotel, N. Y. City, Jan. 31-Feb. 4.

Association of Asphalt Paving Technologists, Kentucky Hotel, Louisville, Ky., Feb. 1-3.

Street and Highway Conference, University of California, Los Angeles, Feb. 3-5.

Ohio Water Clinic Conference, Ohio State University, Columbus, Feb. 11-12.

N. J. section American Water Works Association, winter meeting, Essex House, Newark, N. J., Feb. 16.

Northwest conference on road building, University of Washington, Seattle, Feb. 17-19.

National Society of Professional Engineers, Hilton Hotel, Albuquerque, N. M.

Highway Engineering Conference, University of Colorado, Boulder, Feb. 25-26.

American Concrete Institute, Golden Anniversary Convention, Shirley-Savoy Hotel, Denver, Colo., Feb. 22-25.

American Concrete Pipe Association, annual convention, Fairmont Hotel, San Francisco, Calif., Feb. 25-27.

Associated General Contractors of America, Hotel Statler, Los Angeles, Calif., March 1-4.

Illinois Highway Engineering Conference, University of Illinois, Urbana, March 2-4.

N. Y. State Association of Highway Engineers, Arlington Hotel, Binghampton, N. Y., March 3-5.

Association of Highway Officials of the North Atlantic States, Hotel Shoreham, Washington, D. C., March 10-12.

Southern Municipal and Industrial Wastes Conference, N. C., State College, Raleigh, N. C., March 18-19.

American Congress on Surveying and Mapping, annual meeting and exhibit, Hotel Shoreham, Washington, D. C., March 22-24.

Southeastern section AWWA, Poinsett Hotel, Grenville, S. C., March 29-31.



WAUKESHA Super-Duty Six DIESEL (WAKD)—six cylinders, 6¼-in. bore x 6½-in. stroke, 1197 cu. in. displacement, peak hp 224 at 1600 rpm.

Cutting a new road—part of the Van Wyck Expressway connecting International Air Port with Flushing, Long Island—with a Waukesha Diesel powered Lorain shovel

Owner A. J. Orlando says...

"TO MOVE DIRT FAST and ECONOMICALLY—I prefer

WAUKESHA DIESELS

to any others I have owned or operated"

A. J. Orlando puts on the power—digging starts! It's that quick—that smooth! It's *fast recovery* that makes the Waukesha Diesel so different. "A. J." knows the difference. So do his operators. He owns not one, but three Waukesha Diesel powered 2-yd. Lorain shovels—all working for the A. J. Orlando Contracting Co., Whiteside, L. I., New York.

Plenty of other contractor-owners, and their operators prefer Waukesha Diesels. For the same reasons. More loads per minute. Extra power in the pinches. All-around dependability. And the lively, responsive acceleration, shock-free operation, and clean burning for fuel economy that you get with the patented spherical combustion chamber of the Waukesha Diesel. Check *all* its features—get Bulletin 1415.

231

WAUKESHA MOTOR COMPANY, WAUKESHA, WIS.
New York • Tulsa • Los Angeles

When Tractor Hydraulic System has a VICKERS® Balanced Vane Type Pump

Under the very best conditions, cold weather puts a strain on starting equipment. Every part of the engine is stiffer, and the cold seriously decreases the power of the starting battery. If the hydraulic system has a pump with fixed teeth or lobes, this starting load may be seriously increased above normal.

Vickers Balanced Vane Type Pumps *start at practically no load.* At rest and at normal starting speeds, the sliding vanes are retracted . . . only after the engine fires do the vanes extend and pumping begins. As a result, cold weather starting is much easier when a Vickers Vane Type Pump is used.

Get in touch with the nearest Vickers office for full information.

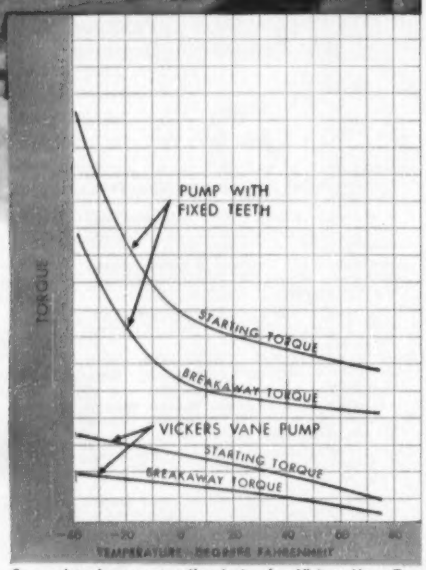

Curves based on comparative tests of a Vickers Vane Type Pump and an equal capacity pump with fixed teeth. Oil used in both was SAE 10W premium grade.



(Left) Schematic diagram of Vickers Balanced Vane Type Pump showing how sliding vanes are retracted at normal engine cranking speeds. No oil is pumped and there is practically no starting load.

(Right) Similar diagram of Vickers pump showing how pump vanes are extended when engine is running. Pumping then begins and continues at all engine speeds.



Vickers Balanced Vane Type Pumps for mobile equipment are available in five basic sizes, 15 normal delivery ratings and a variety of mountings. Ask for new Catalog M-5101.

6628

VICKERS Incorporated
DIVISION OF THE SPERRY CORPORATION
1496 OAKMAN BLVD. • DETROIT 32, MICH.

ENGINEERS AND BUILDERS OF OIL HYDRAULIC EQUIPMENT SINCE 1921

Application Engineering Offices: ATLANTA • CHICAGO (Metropolitan) • CINCINNATI • CLEVELAND • DETROIT • HOUSTON • LOS ANGELES (Metropolitan) NEW YORK (Metropolitan) • PHILADELPHIA (Metropolitan) • PITTSBURGH • ROCHESTER • ROCKFORD • SEATTLE • TULSA • WASHINGTON • WORCESTER

Vol. 152, No. 3

NATIONAL AFFAIRS

Military construction appropriations..... 21
Eisenhower's hospital construction program..... 21
Precast panels act as jet buffers..... 22
Atom sub is nuclear power plant prototype..... 23
St. Lawrence Seaway: Block favoring construction bolstered in Senate dispute..... 24
State highways plans mapped..... 24
Federal-aid highway needs—1953..... 25
Reclamation Bureau names key men..... 26
Cost formula questioned on McNary dam project.. 26
Plans filed in California for Middle Feather River.. 26

LABOR

Racketeering: big ingredient in high construction costs in St. Louis..... 28
Eisenhower leans toward states in labor law wrangle 29

FEATURES

Public work by the hundreds..... 30
Prestressed roof girders set span record..... 36
Jack-type jetties protect levees..... 42

MUNICIPAL

Underground lake slows Spokane tunnel job..... 45
Water?—Tucson's got it..... 47
What—no divining rod?..... 47

INTERNATIONAL

Surveyors in Saudi-Arabia use double observations.. 48
Steel prefabs cut school building cost in Ontario.. 48
Coal project in Australia would create port, railways 48

MEN AND JOBS

National Park Service names new directors..... 50

BUSINESS AND FINANCE

Money: not too difficult to find..... 59
A 2,240-mi pipeline in planned for Canada..... 60
Wenzlick is gloomy: He predicts big price drop in homes for 1954-1957, upturn in '58..... 60
Blaw-Knox buys Apsco..... 61
Activity this week..... 61

NEW PRODUCTS

Schield offers two-position carrier..... 73
$40 fuel filter can save hundreds in injector repair bills..... 73
Striper sprays standard or reflective highways paints 74
Weight and thickness cut, insulating value retained 76
Added powdered metal doubles welding speed..... 76
Publications..... 78

Reader Comment..... 8
Calendar..... 15
Washington Observer. 19
Obituaries..... 51
Construction Reports.. 52
Unit Prices..... 58
Editorials..... 80

THE CONSTRUCTION WEEK

$500-MILLION PLAN—Speculation about a "fourth crossing" of the Hudson River was rife again, after the Port of New York Authority announced it expects to spend $500 million—much of it for "bold improvements"—over the next 10 years. PNYA officials specifically named the now-building third tube of the Lincoln Tunnel, but nothing else.

But close observers pointed to a northward shift of trans-Hudson vehicular traffic, evidenced in PNYA bridge and tunnel traffic statistics. That might mean a new tunnel or bridge between the Lincoln tubes and the George Washington Bridge. Or it might mean double-decking the Washington Bridge—which was originally designed to carry rapid-transit trains on a lower deck that was never built.

One thing that's definitely out, however, is a new tunnel between the Lincoln and Holland Tunnels. Austin Tobin, port authority executive director, said this crossing (proposed in 1951) is not included.

OLD NAME, NEW FIELD—It will be worth watching that move the Arthur G. McKee Co. of Cleveland has made in changing the character of its engineering department. Up to now, McKee has confined itself closely to designing and building blast furnaces, open-hearths and petroleum refineries. Now, the company has formed a new industrial enginering division "to handle engineering contracts for other growth industries that show good potential"—such as atomic energy, aluminum reduction.

D. M. Checkley—former vice-president of J. Gordon Turnbull, Inc., consulting engineers will head the new division as general manager.

WHO'S GOT NICKEL?—Where—and by whom—the next expansion of nickel-producing facilities will come has gotten to be something of a matter for dispute.

A week ago (ENR Jan. 14, p. 19) General Services Administration said it would order a $43-million expansion of the U. S.-built Nicaro plant in Oriente Province, Cuba—now being run by National Lead Co. with Cuban participation.

That expansion, according to a GSA source, effectively would kill plans of Freeport Sulphur (which designed the Nicaro plant for the U. S. government, incidentally) for an $80-million government advance to develop a sulfuric acid leaching process to handle ores from newly developed sources on Cuba's Moa Bay.

Not so, said Freeport Sulphur executives: They can get private financing for their plant—and will go ahead with plans to build it, without government advances.

Fighting hard to get in the last word, GSA said it would grant Freeport a purchase agreement, if private financing could be arranged.

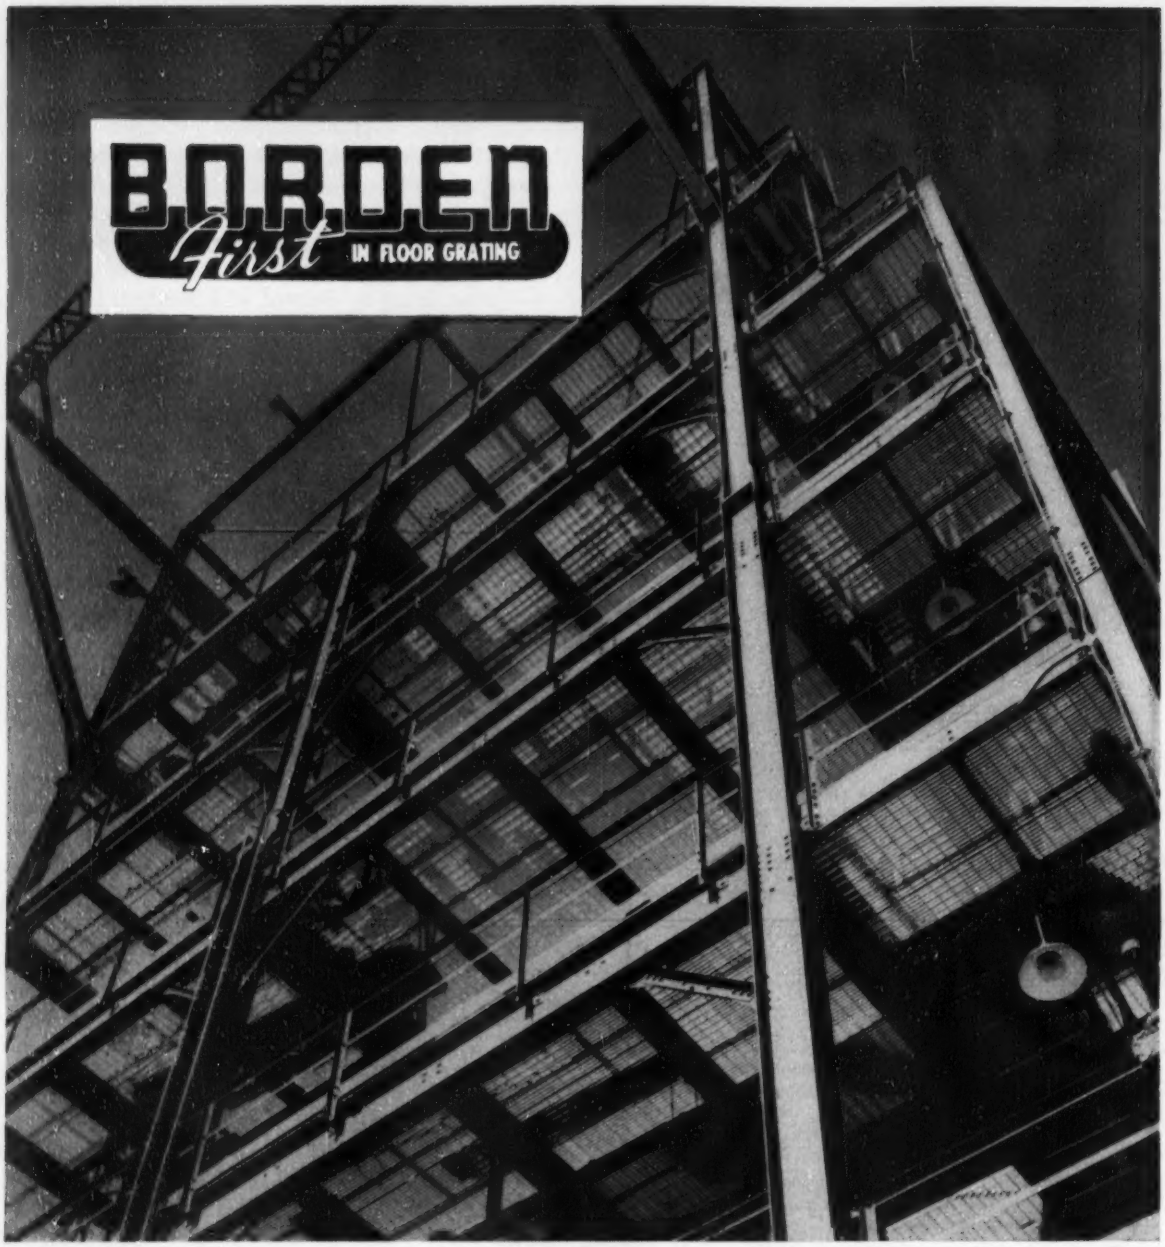

BORDEN MANUFACTURES EVERY TYPE FLOOR GRATING

IN FERROUS AND NON-FERROUS METALS

BORDEN ALL-WELD DESIGN

The best type for use where floors are subject to extreme corrosion or moisture — chemical plants, breweries and other process industries. There are no cracks, open joints, or holes in bars. This type made only in mild steel.

BORDEN RIVETED DESIGN

Most substantial and oldest design of grating made, permits perfect distribution of loads. Made on the truss principle, Borden Riveted Gratings are hydraulically power-forged for strength and durability. Particularly recommended for aluminum.

BORDEN PRESSURE LOCKED DESIGN

Neat, clean, durable, easy to paint and maintain. Pressure Locked Design permits maximum passage of light, heat and air. It is especially desirable in power plants, boiler rooms and all dry area. Deep cross bars increase lateral support.

SEND FOR FREE CATALOG COVERING ALL FLOOR GRATINGS

BORDEN METAL PRODUCTS COMPANY

815 GREEN LANE Elizabeth 2-6410 ELIZABETH, N. J.

SOUTHERN PLANT -- LEEDS, ALA. — MAIN PLANT—UNION, N. J.

WASHINGTON OBSERVER

Construction will feel the impact of Eisenhower's "welfare program." Probably the most significant change: blanketing self-employed architects and engineers into the Old Age and Survivors Insurance Program. This would be compulsory on these professions, although some new groups—clergymen, for instance—would come under social security only if they elected to. You would pay your tax each year on a special form along with your federal income tax return. The tax would be effective on your 1955 income, if Eisenhower's recommendations go through. The rate would be 3% on the first $4,200 of income earned in the covered profession—or $126.

Federal aid to medicine would go to some new kinds of construction. The President would build more nursing and convalescent homes for the chronically ill or disabled to relieve congestion of general hospitals (see page 21).

Unemployment compensation and minimum wage legislation gets the big play as the mainstays of the Republican labor program. Idea is that these are best moves at this time to counter a business downturn. Congress will vote to expand coverage of unemployment compensation—and eliminate exemptions now given many industries from coverage of minimum wage. But Taft-Hartley amendments are completely snarled over Eisenhower's proposal to have government-run strike votes.

•

How much anti-depression action is coming from Washington will become clearer once the President's Economic Council gives diagnosis and remedies on Jan. 28. Though the council's report will have no dollar signs and specific projects in it, there will be the warnings and philosophy.

Right now the Administration figures its biggest incentive for continuing business activity is in its tax program—giving a better depreciation break to manufacturers, suppliers and builders for their plant and equipment. The House Ways and Means Committee will approve a stepped-up amortization schedule, granting the right to writeoff two-thirds of new capital expansion in plant and equipment in half the life of the particular building or steam shovel. The expiration of the excess profits tax Jan. 1 and any jiggling of the corporate rate on April are added incentives.

But the economic advisers will look longer term. Eisenhower talked in his State of the Union about more aids to small concerns to keep them in business; more tax relief to consumers and pushing of quick-to-build public works also are in prospect if the economists see any drastic lull in business activity. Eisenhower had this in mind in approving starts this year on 23 projects.

•

Congress is beginning to act on some other construction projects.

The $21-million Santa Maria water storage project in California is up for a House vote; and the proposed new Air Force academy has committee approval. Both must still go through the Senate.

The Upper Colorado River storage project already is under debate. Interior Dept. officials began defending the three-dam program they've sent to Eisenhower this week. Particularly, they defended building of Echo Park Dam, which wildlife and national park enthusiasts oppose on the ground the construction would mar the scientific and tourist attractiveness of Dinosaur National Monument. House Interior Committee has project under hearing.

•

Watch the Supreme Court in the United Construction Workers vs. Laburnum Construction Corp. case. The court will decide whether an employer can sue a union in connection with an organizing campaign outside the Taft-Hartley Law's unfair labor practices code. The court has twice this term ruled that Taft-Hartley is supreme in unfair labor practices cases. But this week it accepted for decision a Virginia court's ruling that held UCW organizing activities damaged and intimidated Laburnum and entitled him to compensation as a plain case of common law injury.

This powerful shovel uses powerful U. S. Rainbow V-Belts

Loading and excavating calls for plenty of belt muscle. To get the best performance out of this hydraulic shovel, its manufacturers selected U. S. Rainbow® V-Belts for the drive system. They knew that Rainbow V-Belts could withstand continuous shock loads without losing their stretch.

Every U. S. Rainbow V-Belt has the unique Equa-Tensil Cord Section, exclusive with United States Rubber Company. This development insures efficient pull *and* strength under all kinds of conditions. Rainbow V-Belts have a protective jacket that increases the grip while keeping out dirt. The cords are treated with latex to reduce the heat generated by constant flexing. *The inherent stretch of each belt is worked out in the factory before delivery.*

United States Rubber Company has the largest collection of V-Belt molds in the world. That's why, if you want a "special" in a hurry, we can supply you right away—no need to make a new mold. Call any of our 25 District Sales Offices, or write to address below.

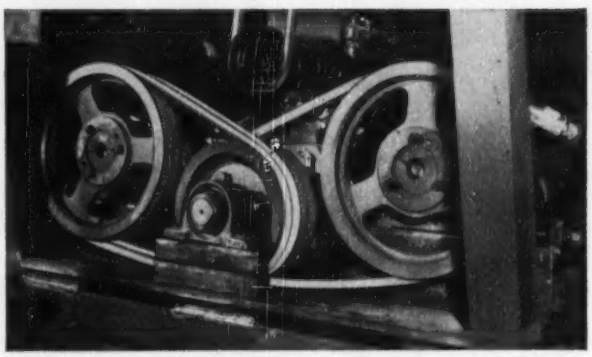

U. S. Rainbow V-Belts on pump drive system of hydraulic shovel. The pump activates the cylinder of the shovel. The belts run continuously when machine is in motion.

"U. S." Research perfects it
"U. S." Production builds it
U. S. Industry depends on it

U.S. RUBBER
SERVING THROUGH SCIENCE

UNITED STATES RUBBER COMPANY

MECHANICAL GOODS DIVISION · ROCKEFELLER CENTER, NEW YORK 20, N. Y.

Hose • Belting • Expansion Joints • Rubber-to-metal Products • Oil Field Specialties • Plastic Pipe and Fittings • Grinding Wheels • Packings • Tapes Molded and Extruded Rubber and Plastic Products • Protective Linings and Coatings • Conductive Rubber • Adhesives • Roll Coverings • Mats and Matting

Military asks $1.1 billion in new construction funds

Pentagon to seek authorization at this session of Congress for further projects costing just as much money

Congress will be asked to appropriate more than a billion dollars for new military construction in fiscal '55. And, the Pentagon will seek authorization at this session for further projects costing as much again.

Request for $1.1 billion for military construction funds was contained in the President's budget message this week but details of the work to be covered by these appropriations won't be ready until perhaps April. However, the funds will be earmarked primarily to finance contract authority previously granted.

(Other aspects of budget message not available as ENR went to press. These will be considered in next week's issue.)

Even before the Pentagon sends up detailed estimates to back up its $1.1-billion request for fiscal '55, it will ask Congress for new authority to start work on an additional billion to a billion and a half dollars worth of new work. This will come in the form of an authorization request to be sent to Congress some time in February.

• **$268 million released**—Congress this week gave approval to the military to go ahead with about $268 million of construction at military bases in the U.S. and abroad. This expenditure comes from funds already available to the Pentagon—but which they were unable to commit until the House and Senate Appropriations Committees had specifically approved the projects and the amount of money to be spent. House committee approval clears the way; the Senate committee had approved the projects and amounts earlier.

During fiscal 1954 which ends June 30 the military will have spent about $1.7 billion on military construction. According to present estimates, expenditures for fiscal 1955 will run about the same. That's down about a half billion dollars from the annual rate for fiscal 1953 which ended last June. Chances are, however, that if Congress votes approval of proposed military construction programs, the spending rate again will climb to more than $2 billion by fiscal '56.

The emphasis on new military construction will still tend toward air bases and related facilities. But, the radical change in the military services ordered at a White House meeting of the National Security Council last Oct. 13, is bound to result in some additional construction centered around new weapons. Some of this will involve launching sites for the Nike and other air defense missiles that are already guarding U.S. cities and military installations. In addition, existing test facilities for special weapons such as the Air Force's guided missile test range at Coca, Fla., and the armed forces special weapons project at Sandia, N. M., likely will be expanded.

• **Big carryover criticized**—Right now the military has some $2,690,000,000 in appropriations for military construction on the books and available for obligation. Of this about $1.6 billion is earmarked for domestic military construction programs and the rest overseas. Against this, there is a total of $1,607,000,000 worth of contracts let but not yet paid for. So, regardless of congressional action on new defense programs, military construction during fiscal year 1955 again will be close to $2 billion.

The existence of the huge carryover of appropriated but unspent construction funds, the House committee on appropriations said, reveals "an inability on the part of the Department of Defense to carry out a construction program which has been presented to the Congress as essential to the support of the armed forces."

President asks for more hospitals, medical facilities, in health message

President Eisenhower asked Congress on Monday to step up federal aid for added construction of hospital and medical facilities—pointing out that the national need right now is for 500,000 more beds.

In his message on health, Eisenhower laid down a more or less new approach in facilities construction designed primarily for the chronically ill and the aged. What he has in mind is something less than a general hospital, with all its diagnostic, and operating facilities, and something more than a mere dormitory.

"Certain non-acute illness conditions requiring institutional bed care can be handled in facilities more economical to build and operate than a general hospital," the President said. "Today beds in our hospitals for the chronically ill take care of only about one out of every six persons suffering from long-term illnesses. The inadequacy of facilities and services to cope with such illnesses is disturbing. . . . If there were more nursing and convalescent home facilities, beds in general hospitals would be released for the care of the acutely ill."

Eisenhower also asked Congress to contribute federal funds for more institutions to rehabilitate the disabled, institutions especially equipped for the purpose. He said his Administration has the goal of returning 70,000 disabled to work in 1955 as against 60,000 in 1953.

Eisenhower recommended amending the Hospital Survey and Construction Act along these lines:

1. Added assistance in the construction of non-profit hospitals for the chronically ill.
2. Assistance in the construction of non-profit nursing and convalescent homes.
3. Assistance in construction of rehabilitation facilities for the disabled.
4. Assistance in construction of diagnostic or treatment centers for ambulatory patients.

He added that special funds should be made available to the states to help pay for surveys of their needs. He said the Public Health Service should be strengthened in its research activities in connection with disease, sanitation, etc.

Since 1946, nearly $600 million in federal funds have been allocated to almost 2,200 hospital projects in the various states. Matched against this amount has been around $1.25 billion by the states. Under this program, facilities for 106,000 hospital beds were built, and 464 public health centers were put up. Private building during the last six years added more than $1 billion in hospital construction.

Nimbus Dam contractors seek damages from firms building project upstream

Contractors for the Nimbus Dam project on the American River near Sacramento, Calif., have filed suit for $275,725 in damages against two contractors on the Folsom Dam project seven miles upstream.

Faulty cofferdam construction and other inadequacies are charged in the action brought in Superior Court at Sacramento by Winston Brothers Co. and Al Johnson Construction Co., Monrovia, Calif., joint contractors on the Nimbus hydroelectric project.

Defendants in the case are Merritt, Chapman and Scott, New York City, and Savin Corp., Hartford, Conn., builders of Folsom Dam.

Winston-Johnson claim they sustained damages in washouts of the Folsom cofferdam Jan. 9, 1953, and May 20, 1953.

It is charged that after the upstream dams had broken, the rush of water in the lower reaches of the river succeeded in breaking the barrier protecting the Nimbus works, damaged equipment, and also halted construction until repairs could be made.

The complaint charges the cofferdams were constructed of "improper and unsuitable materials."

It is also charged that cofferdam design was inadequate and defective: that there was unsuitable and inadequate provision for spillways, escape flumes or other methods of releasing the water in a gradual and orderly manner. Furthermore, the complaint charges, "defendants knew, or in the exercise of reasonable care should have known" that injury or damage would result to persons and property situated downstream unless the cofferdams were adequate.

Folsom Dam is a Corps of Engineers project and the Bureau of Reclamation is supervising construction at the Nimbus site.

Toll financing ruled out for proposed Tampa bridge

Anticipated toll revenues would be insufficient to pay the estimated $11.5-million cost of a proposed third bridge across Tampa Bay, according to a survey submitted to Florida's State Road Board by Coverdale and Colpitts, New York consulting firm.

Traffic and earnings studies of the span indicated that the project would support about a $6-million revenue bond debt with a reasonably good margin, the engineers reported. "Theoretically," the firm said, a $10-million debt could be paid off in about 30 years with tolls, "but the debt service coverage is only 1.0 or no margin or cushion at all."

In the past, as a matter of policy the Florida Road Board has required that any proposed revenue project must show prospective earnings of no less than 1.75 times the amount necessary to cover the debt.

W. Howard Frankland of Tampa, a former road board member and leader in the move to get a third bridge across Tampa Bay, said the engineering report would be no stumbling block to construction of the span. He believed the bridge could be built as a free structure, with Hillsborough and Pinellas Counties each furnishing about one-fourth of the funds from secondary road money, the state one-fourth and the federal government one-fourth. To ease this financing the bridge could be financed only partly by tolls, he pointed out.

Toll roads are needed but not in Vermont

While other states have been busy planning toll road projects to hurry the motorist on his way, Vermont has been quietly taking stock of its own road system. One conclusion of the study: A high-speed toll road would be completely out of character.

The report (prepared by Cleveland consulting engineer George B. Sowers) takes the view that tourists do not go to Vermont to roar along speedways but to relax and enjoy the state's natural beauties. "A toll road would act as a high pressure pipeline, speeding visitors through the state and cutting them off from the very features they came to enjoy. By improving its free road system, Vermont can give fully adequate highway service in a tranquil atmosphere."

Bottlenecks in Vermont cities, says the report, can't be cured by building by-passing turnpikes. Surveys reveal that 80 to 90% of the motorists on main highways entering such cities as Montpelier, Burlington, Bennington, Brattleboro, Barre, Rutland and Newport want to drive into the cities.

In his investigation Sowers found no section of the state where toll roads would create a substantial increase in traffic. Instead, he concludes they might reduce tourist flow.

The study does list two possible locations where toll roads might be desirable—but suggests in each instance that there are better and more economical means of eliminating traffic problems. One of these locations is the 40-mi, two-lane highway between Montpelier and Burlington on U. S. 2. The other is the 7-mi stretch between Montpelier and Barre on Route 302.

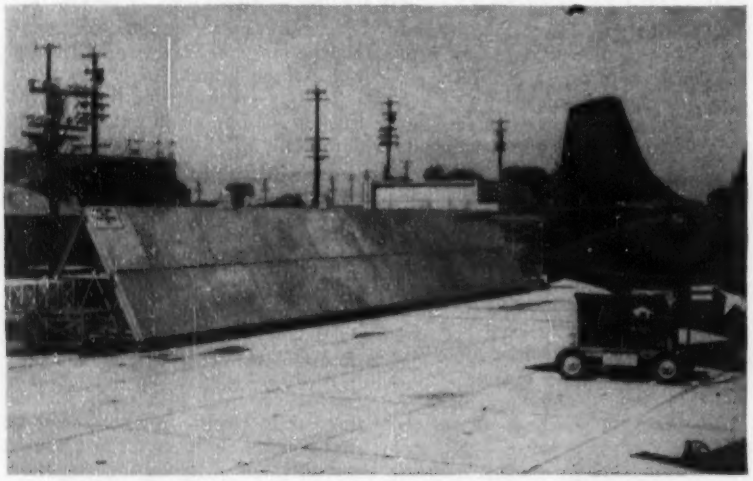

Precast panels serve as buffers for jet blast

Protection for personnel against jet plane blasts is provided by rows of precast concrete wall panels stretched across the pre-flight test area of an aircraft manufacturing plant in Columbus, Ohio. The 5-in. panels form the face of timber and steel-framed barriers—triangular in cross-section—which are secured to the concrete apron. New aircraft are wheeled into position 20 ft in front of the barrier and the panels deflect the blast of the jet engines during the testing. Although the panels are exposed to intense flame erosion and reverberatory vibration, they have withstood the punishment of the jet blasts successfully. The panels are made with a lightweight aggregate especially chosen to withstand high temperatures. George Sheaf and Co., Columbus, Ohio, was the general contractor.

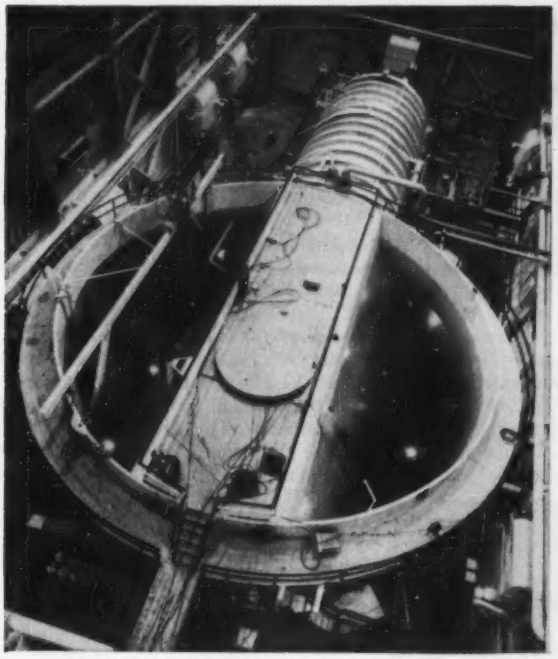

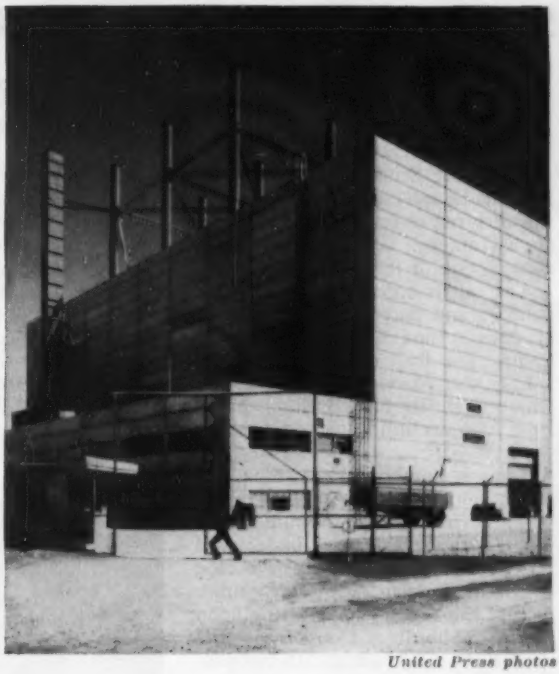

United Press photos

Atom sub nuclear power plant protype

Launched this week, the Navy's newest submarine, atom-powered USS Nautilus, represented to engineers around the country a major step toward atomic power plants. The experimental atomic submarine (above) in the eight-story, windowless test laboratory in Idaho (ENR Dec. 10, 1953, p. 45) provided the first step in proving the real possibilities of generating electric power by means of nuclear reactors.

With its reactor submerged in a 50-ft-dia tank, the prototype model of the Nautilus has demonstrated its practicability. Test conditions made it necessary that the windowless building housing the model be slightly pressurized by air-conditioning to keep dust particles in the air from infiltrating into the laboratory. The building is made of concrete wall panels bolted to a steel frame. Six steel stacks on top of the laboratory provide exhaust outlets for emergency purposes. Square stack at the left is for normal ventilation.

Colorado River project gets hearing

Authorization of the $1.1-billion Upper Colorado River storage project faced two big obstacles as hearings got underway before a House committee in Washington this week.

The Department of Interior bill still lacked approval of the Bureau of the Budget. Without this—which amounts to White House approval—the Administration could not give it full backing.

Conservationists were out in full force to block the Echo Park unit of the project because it would have to be located within th confines of the Dinosaur National Monument.

Interior Undersecretary Ralph Tudor, who had conducted a personal survey of alternate sites, testified that the Echo Park site is the most feasible for a key storage unit of the project. His testimony indicated that evaporation rates of alternative sites ruled them out as a practical matter.

Two main units of the initial project are Echo Park which would cost an estimated $176.4 million, and Glen Canyon which would cost an estimated $421.3 million. Together, these projects would provide 32 million acre feet of storage and supply enough hydroelectric power to justify installation of one million kilowatts of generating capacity.

Of the total cost of these two projects, $98.3 million would be allocated to irrigation and other water consuming uses and $499.4 million would be allocated to power. Cost allocations for the remaining units of the project have not been determined.

A staff report of the House Interior and Insular Affairs Committee shows the benefit-cost ratio for the initial phase of the project would be 1.64 to 1.

Vibration of dam gates studied by Army Engineers

At Fort Randall Dam, Picktown, S. D., U. S. Army Engineers have carried on extensive tests on vibrations in the 50-ton steel gates that control the flow of water through the dam's 12 tunnels. The tests represent the first research of this type ever carried out on gates with an elastic suspension.

Each gate measures 11x13 ft and is of a vertical lift tractor type. There are two gates in each tunnel and the force of water against each one at full pool is 1,340 tons. When they are opened, water flows under the gates at 40 mph.

Field tests were performed with an accelerometer welded to the gates, and the vibrations were recorded on an oscillograph. The force of water going under them causes the gates to vibrate up and down, shake back and forth, rattle sideways, and even to flex. Data from the field tests is now being analyzed at the Waterways Experiment Station, Vicksburg, Miss. Closest scrutiny will be directed to recordings of vibrations built up when the gates are partially opened. The studies should reveal under what conditions the damaging cumulative effect of frequencies is built up. This should help to avoid the effect in future operation of the dam.

St. Lawrence

Bloc favoring construction bolstered in Senate

The St. Lawrence Seaway legislation is before the Senate again this week. But this time there is a difference—on this fifth try, observers think the Senate will approve U. S. participation in construction of the project.

The bill is opposed chiefly by the railroads and port cities on the Gulf of Mexico and along the Atlantic Coast. The floor opposition is being led by the Maryland and Louisiana senators: Butler and Beall of Maryland, Ellender and Long of Louisiana.

• **House is stumbling block**—Since the legislation was first urged on Congress by President Harding's Administration in 1922, the seaway never has reached the House floor, whereas in the Senate the Foreign Relations Committee has five times sent it to the floor.

The real hurdle in House is the powerful Rules Committee. The opposition, which stems principally from the railroads, hopes to profit from the fact that Rules Committee Chairman Leo Allen is from Illinois where railroad interests, particularly in Chicago, have come out strongly against the seaway.

The two factors that make prospects for passage this session the brightest in the history of the proposal: (1) Canada's determination to go it alone on construction of the seaway, if the U. S. fails to approve participation and (2) the push given it by President Eisenhower by putting the military defense label on it.

• **Creates corporation**—Wiley's bill calls for the creation of the St. Lawrence Seaway Development Corp., a wholly owned government agency similar to the Reconstruction Finance Corp. It would wind up with authority enough to negotiate with its Canadian opposite for (1) construction of the seaway, (2) operation of the seaway and (3) the fixing of tolls.

The new corporation would have authority to sell bonds to the U. S. Treasury to the amount of $105 million, which would finance the U. S. portion of the seaway construction. The bill provides that the corporation must assure itself that the Canadians will proceed with their navigation works legislated for during 1951, and that the State of New York and its opposite in Canada proceed with power projects tied in with the seaway.

A key point: The tolls are required to provide enough revenues to amortize the principal and interest of the corporation's debts over a period "not to exceed fifty years."

State highway plans mapped out

Three states consider major programs, others carry on as some legislatures start new sessions

At least three of the 10 state legislatures now in session must cope with problems of major highway programs, while others will handle lesser schemes, a legislative rundown by ENR indicated this week.

In the three states—Ohio, Massachusetts and New York—governors called on lawmakers for approval of highway schedules that would involve spending more than $1.5 billion toward completing master schemes previously started or planned. Other states apparently won't have such extensive work to consider—but all will be involved with the problem of providing better road transportation.

Some of those needs are indicated in the table at right.

• **Billion for Ohio**—Governor Frank J. Lausche of Ohio outlined an eight-year, $1-billion highway construction program, in his speech to a special legislative session. Last week the legislature implemented last November's $500-million highway bond issue designed to rebuild Ohio's 6,200-mi primary road system, and also voted an $82-million issue for the period ending in June 1955. Lausche pointed out that his $1-billion plan—which includes the $500-million bond issue—still would be insufficient to cure all of the state's highway ills. His program envisaged $265 million of road construction in each of the next two years plus a 300-mi. $400-million north-south turnpike between Cincinnati and Conneaut (in feasibility survey now), and a turnpike spur from Columbus to Toledo.

• **$300 million for Mass.**—Governor Herter, in his annual message recommended a six-year, $300-million highway construction program to complete the state's Master Highway Plan of 1948.

• **In New York**—Governor Dewey told solons that a method of financing construction of the Erie, Niagara, New England and Berkshire branches of the New York State Thruway will be ready in time for consideration at this session. Planning for the vital new sections of the highway is advanced, and these may be placed under construction as soon as funds become available.

• **Total highway needs**—Estimates of the highway needs of all the states ($35 billion) are given in the table on the opposite page. As reported briefly last week (ENR Jan. 14, p. 23) this table was compiled by the American Association of State Highway Officials from official estimates of the state highway departments. It covers only highways in the federal aid primary and secondary systems (totaling 672,000 mi). The estimate does not include state highways that are not in the federal aid systems, nor does it include county and township roads or local city streets.

Bachrach photo

CHARLES R. WATERS received one of HRB's distinguished service awards.

Highway Research Board makes engineering awards

Four engineers have been honored by the Highway Research Board for outstanding achievement in their fields. Awards were presented at the board's recent annual meeting in Washington.

Charles R. Waters, district engineer for the New York State Department of Public Works at Buffalo, and Prevost Hubbard, former chemical engineer of the Asphalt Institute, were given the Roy W. Crum Award for distinguished service. Both have been associated with highway research, Waters for over 25 years, and Hubbard for nearly 50 years.

Earl C. Sutherland and Harry D. Cashell, engineers with the U. S. Bureau of Public Roads, received the highway research award for the most outstanding technical paper presented at the last annual meeting. They were co-authors of a paper on "Structural Effects of Heavy-Duty Trailer on Concrete Pavement."

Federal-aid highway needs—1953

(COMPILED BY AMERICAN ASSOCIATION OF STATE HIGHWAY OFFICIALS)

State	Primary		Secondary		Urban		All Systems	
	Miles in need of Improvement	Cost (in thousands)	Miles in need of Improvement	Cost (in thousands)	Miles in need of Improvement	Cost (in thousands)	Total Miles in need of Improvement	Total Cost (in thousands)
Alabama	1,551	$126,131	5,411	$118,485	221	$70,778	7,183	$315,394
Arizona	1,712	126,098	2,497	68,511	73	34,814	4,282	229,423
Arkansas	2,775	234,789	11,854	280,069	115	101,323	14,744	616,181
California	4,556	982,614	5,971	646,920	534	1,077,581	11,061	2,707,115
Colorado	1,134	148,582	1,762	112,713	74	68,600	2,970	329,895
Connecticut	442	225,321	376	83,647	244	383,088	1,062	692,056
Delaware	362	63,731	983	21,597	41	40,635	1,386	125,963
Florida	2,647	223,579	3,754	172,442	364	434,406	6,765	830,427
Georgia	3,000	418,000	8,000	200,000	310	222,000	11,310	840,000
Idaho	2,024	176,754	2,439	73,064	40	15,290	4,503	265,108
Illinois	3,310	604,573	4,062	89,964	460	785,686	7,832	1,480,223
Indiana	3,374	327,343	5,683	334,179	284	65,940	9,341	727,462
Iowa	7,465	646,000	16,533	182,392	778	115,400	24,776	943,792
Kansas	3,910	338,679	10,575	116,990	168	120,150	14,653	575,819
Kentucky	3,010	240,800	13,200	528,000	105	70,500	16,315	839,300
Louisiana	2,000	160,000	3,800	91,200	198	171,282	5,998	422,482
Maine	887	84,799	694	27,974	76	45,048	1,657	157,821
Maryland	976	221,104	4,586	202,026	162	228,905	5,724	652,035
Massachusetts	813	249,460	1,910	269,028	657	442,663	3,380	961,151
Michigan	3,212	257,948	14,429	300,079	271	234,031	17,912	792,058
Minnesota	4,140	155,811	12,216	245,387	352	213,114	16,708	614,312
Mississippi	2,890	155,500	5,950	95,000	114	22,150	8,954	272,650
Missouri	5,437	385,664	11,730	101,700	243	284,000	17,410	771,364
Montana	4,200	306,600	1,950	64,350	27	10,600	6,177	381,550
Nebraska	3,416	185,311	4,952	114,080	78	31,957	8,446	331,348
Nevada	1,789	96,397	1,088	29,874	22	8,267	2,899	134,538
New Hampshire	828	88,597	852	60,243	100	23,960	1,780	172,800
New Jersey	703	881,550	1,097	112,779	255	670,300	2,055	1,664,629
New Mexico	1,852	176,530	2,367	95,660	60	24,000	4,279	296,190
New York	4,452	1,262,100	9,435	658,900	1,082	965,200	14,969	2,886,200
North Carolina	3,854	358,600	600	20,000	213	111,825	4,667	490,425
North Dakota	2,309	111,800	8,726	121,383	165	30,900	11,200	264,083
Ohio	2,800	600,000	3,900	390,000	400	750,000	7,100	1,740,000
Oklahoma	4,826	485,928	7,074	171,447	165	108,123	12,065	765,498
Oregon	2,930	216,817	3,203	106,465	108	67,285	6,241	390,567
Pennsylvania	3,800	837,880	4,656	297,015	196	213,056	8,652	1,347,951
Rhode Island	79	28,190	102	10,606	83	135,146	264	173,942
South Carolina	3,358	114,743	4,866	66,421	160	81,300	8,384	262,464
South Dakota	2,965	195,393	8,612	142,399	76	16,340	11,653	354,132
Tennessee	3,867	617,089	6,570	195,430	110	77,177	10,547	889,696
Texas	13,227	803,892	15,393	278,130	684	359,317	29,304	1,441,339
Utah	1,836	175,000	1,832	50,000	131	59,000	3,799	284,000
Vermont	806	121,461	944	34,172	35	17,570	1,785	173,203
Virginia	4,031	324,832	10,239	271,186	211	95,783	14,481	691,801
Washington	2,588	328,015	4,144	165,749	162	244,614	6,894	738,378
West Virginia	2,149	453,831	9,399	516,682	173	201,830	11,721	1,172,343
Wisconsin	4,280	428,000	14,800	624,000	200	140,000	19,280	1,192,000
Wyoming	2,145	124,975	772	22,613	27	11,804	2,944	159,392
District of Columbia	.....	.....	18	5,284	60	106,623	78	111,907
Hawaii	164	15,875	231	26,372	17	6,658	412	48,905
Puerto Rico	335	102,000	885	60,000	60	68,000	1,280	230,000
Total	**141,216**	**$15,994,686**	**277,122**	**$9,072,607**	**10,944**	**$9,884,019**	**429,282**	**$34,951,312**

Summary of mileages

	Primary	Secondary	Urban	Total
Total Approved	218,594	438,033	16,510	**673,137**
Percentage in need of Improvement	64.6%	63.3%	66.3%	**63.8%**

Reclamation Bureau names key men

Two new regional directors and an associate chief engineer for the Bureau of Reclamation were appointed last week by Commissioner Wilbur A. Dexheimer.

Frank M. Clinton became director of Region Six at Billings, Mont., and R. J. Walter took over Region Seven with headquarters at Denver. At the same time, Grant Bloodgood moved up to the newly created post of associate chief engineer in the Denver office of assistant commissioner-chief engineer Leslie W. McClellan.

No other top changes are at present planned for the regional offices or for the staff of the assistant commissioner in Denver. With the realignment of the Washington office (ENR Jan. 14, p. 7) the latest changes pretty well wrap up the reorganization that has been going on since Dexheimer took office. Choosing his appointees entirely from within the bureau, the commissioner has made an obvious effort to restore the principle of nonpartisan career service in the agency.

Last week's appointees have compiled service records of from 16 to 25 years with Reclamation. Up to last week Bloodgood was chief construction engineer at the bureau's Denver engineering center, Clinton was assistant director of Region One at Boise, Idaho, and Walter, was construction engineer on Webster Dam near Stockton, Kan.

Another bureau engineer moved up to a bigger job last week on the Denver office staff. J. R. Riter became chief development engineer in charge of the project development division, including the hydrology branch that he formerly headed.

Clinton, new director of Region Six, succeeds Kenneth F. Vernon, who remains on the Billings staff as special assistant to Clinton. In Region Seven, Walter takes the place of former director Avery A. Batson, who joins Riter's staff in the office of the assistant commissioner-chief engineer.

Cost formula questioned on McNary Dam project

In a petition to the Federal Power Commission, the Northwest Power Assn., has asked for intervention and rehearing on the interim allocation of McNary Dam costs issued in December by FPC.

The Northwest group points out that 92% of the total construction costs are allocated to power—leaving an allocation to navigation of only 8%. The allocation, claims NPA, in assigning less than 20% of total cost to navigation is "in contravention of the representations made to Congress by the Corps of Engineers at the time the project was presented for authorization primarily for navigation purposes."

NPA declares that the allocation would subsidize navigation interests at the expense of the electric power ratepayers of the Pacific Northwest. They hold that the FPC allocation order is further in error in charging navigation only 2.5% of the cost of jointly used facilities (power and navigation). NPA believes that the allocation tacitly violates a policy declaration of Congress that navigation works would be limited "to those in which a substantial benefit to navigation will be realized." If the Bonneville Dam project is a precedent, they say, then the FPC allocation fails to conform with the policy used for that project, where 50% of joint construction costs was charged to the primary purpose of navigation.

Plans filed in California for Middle Feather River

Plans for a $90-million water and power development on California's Middle Feather River have been filed by the Richvale Irrigation District with the State Division of Water Resources. Filing plans with the state is necessary to establish water rights for the project. The Richvale District is also taking action to obtain authorization from the Federal Power Commission for use of federal lands affected.

Six dams (affording 250,000 acre-ft of storage), 23 mi of tunnel, and five hydroelectric stations (installed capacity 190,000 kw) are included in the irrigation project. Water is needed to supplement the present supply for the area's rice fields, biggest in the state. Electrical energy is to be used in the public utility market to reduce the cost of irrigation water.

Richvale will coordinate its development with the State Water Board's proposed $1.2-billion Feather River project. Of major importance to California, the state project will involve a major dam and power plant at Oroville on the Feather River, and construction of canals and pumping stations to transport water hundreds of miles to water-short Southern California. The state legislature already has appropriated $1.5 million for engineering studies of the big project.

How would you vote?

Most important engineering event of 1953

The pages of *Engineering News-Record* reported many events that promise to shape for the better the future course of civil engineering and construction. What would you pick as the most significant of those events in 1953? Or if that is too difficult, what were the three most significant?

The editors believe that the opinions of readers on what was important may be as significant as the events themselves. We need your vote quickly so that results can be published in the February Annual Report and Forecast issue. Just fill out the coupon and mail.

The Editors
Engineering News-Record
330 W. 42nd St.
New York 36, N. Y.

Here is my vote on the most important engineering event(s) of 1953:

_____

_____

_____

_____

POLE HILL, COLORADO

Another Penstock job made easier with DRESSER COUPLINGS

Lighter, high-tensile steel pipe saves tonnage, cuts shipping costs, speeds installation of Pole Hill penstock.

A part of the Colorado Big Thompson Project, the 98" Pole Hill penstock carries water to a power house near Loveland, Colorado. The bed for this penstock is on a 34° slope, much of which was cut out of solid rock. To make this difficult construction job easier and more economical, U. S. Bureau of Reclamation engineers specified a Dresser-Coupled installation.

Dresser Couplings permit the use of high-tensile steel pipe. Thinner pipe walls *save up to 25% of total penstock weight.* Longer pipe lengths mean fewer joints and fewer anchors to prevent progressive creep. High-tensile steel pipe can be Dresser-Coupled with a minimum of time, skill and heavy equipment. The "give and take" in Dresser Couplings eliminates all problems of expansion and contraction. Permanent, bottle-tight joints are assured.

Weeks, sometimes months, are saved in Dresser-Coupled penstock installations. The net result—*earlier revenue* from plant operation, *continued revenue* from a permanently tight, maintenance-free line.

Above—Requiring no special supports, this portion of penstock will be back-filled after field coating is applied.

Left—98" O.D. Dresser Coupling nearest powerhouse . . . shop-tested to withstand 675# psi.

BE SURE you get a *better, faster* penstock installation. Put high-tensile steel pipe and Dresser Couplings in *your* specifications.

DRESSER®

COUPLINGS

Dresser Manufacturing Division
(One of the Dresser Industries)
319 Fisher Avenue, Bradford, Pennsylvania

FREE ENGINEERING DATA

Mail this coupon for interesting and informative engineering data on diversified Dresser installations. It's file material that will be a big help next time you're designing a pipeline.

DRESSER MANUFACTURING DIVISION
319 Fisher Ave., Bradford, Pa.

Please send me your latest "Report of Dresser-Coupled Lines", and copies of your Expansion Joint and Style 38 Catalogs.

Name_____
Title_____
Company_____
Street_____
City_____ Zone_____ State_____

Racketeering in St. Louis—a case history

The harsh realities of how racketeer infiltration of honest trade unions can push construction costs up to prohibitive levels and stifle physical growth of a city were being made painfully apparent this month in St. Louis, Mo.

Shakedowns, restrictive labor practices and discrimination against out-of-town contractors, detailed by a crusading newspaper and given further impact by indictment and conviction of a lengthening string of racketeers, have amounted to something of an economic education for the city.

For the construction industry these blunt facts emerged:

• ENGINEERING NEWS-RECORD's figures show construction costs in St. Louis are a whopping 10% higher than the average for eight major southern cities, and 7% higher than the average for the 20 principal cities in the United States.

• Restrictive practices have speeded the search for new building materials and techniques. Antics of the St. Louis bricklayers, for example, have resulted in reduction in demand for their services as builders turned to substitute materials. No figures are available—but it is certain that some construction business has been lost.

The major disclosures, together with subsequent indictments, stemmed from spadework done during the past two years by Carl Baldwin, a reporter for the ST. LOUIS POST-DISPATCH. Baldwin, a quiet man whose perpetual look of round-eyed incredulity elicits confidence after confidence, was able to find contractors who would cite figures and facts about their experiences.

Restrictive practices by bricklayers resulted in an increase in the cost of brickwork in St. Louis since World War II which was almost 7% higher than the average increase for the rest of the nation.

The rise was blamed for the switch by heavy industry in and around St. Louis from masonry to corrugated asbestos siding, metal wall panels and tilt-up concrete slabs, despite a preference for brick.

In St. Louis, as elsewhere, most union leaders are honest. It's the minority who can damage labor's reputation in a city. And in St. Louis there were the courts for labor leaders charged with offenses other than economic shortsightedness.

• **Who's who**—Paul H. Hulahan, business agent of Local 42, AFL building laborers and hodcarriers union, was first to go to trial of 16 AFL leaders who were indicted last year on charges of violating the federal anti-racketeering law. On Jan. 7, a jury which heard four days of testimony found him guilty in less than two hours.

The case against Hulahan turned on three alleged shakedowns of contractors on jobs in the St. Louis area:

• Conspiring with another union official in an attempt to extort $50,000 in 1951 from M. H. Carpenter, a Los Angeles contractor who headed a firm building a $5-million housing development in north St. Louis County.

• Extorting $400 in 1950 and 1951 from John Farrington, a superintendent for Jones-Hattelsater Construction Co., Inc., of Kansas City. The concern was erecting a storage building for Valier & Spiers Co., a St. Louis flour milling firm.

• Conspiring with two union business agents to extort $1,600 in 1950 from McCarthy-Pohl Construction Co., then contractors for grading operations at municipal airport.

Hulahan, at liberty on $50,000 bond, steadfastly affirmed his innocence.

Both the business agents named as co-conspirators with Hulahan were murdered in 1952.

In their testimony, Carpenter and other witnesses told of being approached with requests for money in return for which labor peace would be insured. John E. McCarthy, vice-president of McCarthy-Pohl, said the company had to obtain an extension of time on the airport job because of work stoppages. The work cost $429,899 more than had been estimated, he said.

The vice-president of the concern which built the structure for Valier & Spiers, Clarence P. Reedy, Kansas City, said the company lost $411,000 on the contract. This was due in considerable measure to "trouble with laborers," he said.

• **Preface**—Pattern of the Hulahan trial disclosures, with their atmosphere of gun-toting business agents, meetings in hotel lobbies and mysteriously controlled strikes, was foreshadowed by events of 1951.

In that year, the Air Force's $24,818,000 program at Scott Air Force Base near Belleville, on the east side in Illinois, was endangered. Few contractors would bid. Those who did admitted they had padded their estimates to meet unpredictable costs. The Army Corps of Engineers rejected first bids as too far out of line.

There was definite evidence that the grip of racketeers on a few key building unions and on several major contractors threatened expansion of private industry and was choking off defense construction in the St. Louis area.

Contractors, particularly on the Illinois side, reported shakedown efforts on jobs which had completion deadlines.

They charged that jurisdictional disputes and slowdowns were dictated if contractors failed to cooperate.

Frazier-Davis Construction Co.,

GUILTY—Paul Hulahan

VICTIM—M. H. Carpenter

contractor on a $5-million gas pipeline, was said to have been approached by a man representing himself as an emissary of a union leader. The contractor refused to make a $50,000 payoff despite threats that the job would cost $500,000 more than estimated.

The project, initiated in May 1950, had an October deadline. Jurisdictional disputes broke out between members of Local 562, AFL steamfitters union, and the AFL hodcarriers and common laborers union. Work stoppages covered a total of 30 work days, and the job cost $500,000 more than estimates, as predicted.

Boss of the steamfitters local then and now is Lawrence Callanan, an ex-convict and one of AFL leaders under indictment on charges of racketeering. He is a power in politics and his brother Thomas, was until recently sheriff of St. Louis.

• **Pattern emerges**—In 1951 disclosures by the POST-DISPATCH, two Chicago contractors reported they withdrew as competitors in the east side construction field after suffering heavy losses on government contracts. They said labor costs on their St. Louis area jobs ran to three and a half times what they would have been around Chicago.

One contractor said he lost $80,000 on a $320,000 federal housing project in Madison County in 1948. The other told of dropping $125,000 on a $622,000 housing job at Scott AFB in 1947.

St. Louis has its share of complaints that out-of-town contractors are discriminated against while certain local ones seem to find labor seas calm.

A specific complaint of discrimination found expression last July when Rowley-Berst Co., a Cincinnati contractor, filed suit for $600,000 damages against Leo F. Havey, business agent of the AFL bricklayers union in St. Louis, the union itself, a St. Louis brick contractor and others.

Rowley-Berst alleged loss of $258,000 on a construction project at Jefferson Barracks VA hospital because of slowdowns and other difficulties. The company charged a conspiracy in restraint of trade.

Havey, prominent in civil and political affairs in St. Louis, is one of the AFL group under federal indictment. He is charged with threatening violence to the Cincinnati concern in a plan to prevent Negro union bricklayers, and other bricklayers living outside the state from being brought there for work.

Following his indictment, Havey resigned as chairman of the Land Clearance for Redevelopment Authority in St. Louis. He served on the St. Louis Housing Authority in 1950-52 and is considered one of the most politically influential labor leaders in the city.

• **The high cost of bricklaying**—Union Electric Co. switched to masonry substitutes after the company took a "terrific beating" in construction of the third section of its Venice power plant on the east side in 1948, an official declared. Workers laid an average of only 200 bricks a day, so that walls cost $7.60 a sq ft.

In consequence Union Electric used substitutes in construction of the Venice plant's fourth section and the new Meramec plant in St. Louis County. The company estimated it saved $580,000 on the two jobs, and bricklayers lost a chance to lay several million bricks.

St. Louis Post Dispatch photos

CIVIC LEADER—Leo Havey

Building trades irked as Eisenhower leans toward state control of labor

A basic tenet of the Eisenhower Administration is that the 48 states should have more control over matters in their interests—that the federal government should retrench its far-flung empire.

This philosophy is being applied to labor relations and the AFL building trades unions complain that it strikes at the heart of their activities.

When President Eisenhower proposed several amendments to the Taft-Hartley Act to satisfy the demands of the construction unions, he proposed—at the same time—that the demands of the states to handle labor matters within their borders be looked into.

He did not, as the unions had hoped, seek to change Taft-Hartley so that the federal law would be supreme over state labor laws. For example, the states can now outlaw the union shop—14 have already done so—even though it is permitted under T-H.

AFL building trades president Richard J. Gray said the White House proposals for the construction industry were "meaningless" unless something was done to prevent the states from invoking "right-to-work" laws that make the union security clause illegal.

Congress is more likely to take some action on extended state control of union activities. So the building trades unions may be worse off—from their standpoint—at the end of the year, despite the Eisenhower stand.

These are the building trades objections to the state "right-to-work" laws:

• They will not permit national agreements with contractors. Those agreements, containing union shop clauses, cannot be extended to the 14 states that outlaw union security.

• They reject the basic claim of construction unions that their members necessarily must be highly trained; that the unions aid in this training; that unskilled (non-union) workers should not be permitted on construction projects.

The Eisenhower amendments would be highly acceptable were it not for the restrictions of state laws. But, a coming report from federal agencies on the states rights issue will not eliminate these restrictions; it is more likely to extend them.

Labor Secretary James Mitchell is promoting the states rights study suggested by the President. Congress is anxiously awaiting the report which will be some months in the making (the inter-agency study committee is just getting organized).

With most state legislatures meeting this year, more "right-to-work" laws will be put forward. These are the states with such laws now on the books:

Alabama, Arizona, Arkansas, Florida, Georgia, Iowa, Nebraska, Nevada, North Carolina, North Dakota, South Dakota, Tennessee, Texas and Virginia.

Skyscraper Plaza is over street, garage and shops.

Mountain Expressway has big bridges, long tunnels.

Public works by the hundreds

Venezuela dedicates 450 different projects designed to raise it standards of transport, education, health and housing, and to aid agriculture and business

Waldo G. Bowman
Editor, Engineering News-Record

For an entire week early last month, cutting ribbons became the principal occupation of the Venezuelan government. In every one of the twenty-two estados of that oil-rich country public officials wielded scissors like French dressmakers, made speeches, paraded and pointed with pride—getting little sleep, but garnering lots of glory.

There was justification for such a spirit of national fiesta. A great public works program, developing over the last five years or so, had been brought to such a stage of completion as to permit the mass dedication of 450 separate projects.

The celebration was also timed to mark the first year in office of the country's development-minded president, Colonel Marcos Perez Jimenez, whose avowed objective is to remove his country from the underdeveloped-nation category at the earliest possible moment. To that end he devoted $227 million (one third of the national budget) to public works last year, and has earmarked $237 million more this year. In addition, sizable sums are being channeled to a National Agrarian Institute whose job is to reclaim jungle land for agriculture and to establish farmer colonies to work it. This is being done in an effort to boost the country's lagging food and livestock output.

Among the 450 public works projects dedicated were a few worthy of world-wide attention as technical achievements, and literally scores of more ordinary jobs each of which made up in local utility what it may have lacked in wider significance. Among the latter were 63 schools, 32 hospitals and clinics, 107 water supplies, 39 electric power plants, 12 public housing projects, 58 public buildings such as city halls, postoffices and markets, several hundred miles of farm-to-market roads and paved city streets, numerous sanitary improvements and several airport and river development schemes.

The big projects were mostly concentrated in the capital city of Caracas and its vicinity. One was a 10.5-mile toll express highway through the mountains linking 3,000-ft-high Caracas with its seashore airport at Maiquetia and its ocean port at La Guaira and costing $60 million.

Another was a business district boulevard tying in with new parkways and other widened streets that reach out into the suburbs.

A third project dedicated was a commercial and government center of buildings—lining five blocks of the new boulevard—that includes two 28-story structures and is underlaid with a parking garage and shopping center as well as with a tunnel that carries through traffic under the development.

Thirteen modern and modernistic buildings of a new University City, a magnificent army officers' club and a new luxury hotel were also in the big project class of newly opened facilities.

•**$6 million a mile**—The claim is made that the 10.5-mile, $60-million Caracas-La Guaira highway is the most expensive piece of roadbuilding in the world. And the claim is difficult to challenge as for highways in open country.

Few U. S. turnpikes have cost much over $1 million a mile, the principal exception being the 118-mile New Jersey Turnpike at $2.4-million. The 8-mile extension of that turnpike to the Holland Tunnel is estimated to cost $13 million a mile, but this will be in an area of high land values and will include a bridge over Newark Bay, and costly interchanges.

From the standpoint of cost, the Venezuela road is indeed a remarkable project.

It is likewise a notable technical and construction achievement. Rising 3,000 ft in 10.5 miles, it is built in every respect to modern expressway standards. Its two 24-ft asphaltic concrete roadways are separated by a

Luxury Hotel like an Inca pyramid bent around dining terraces and swimming pool, its 400 rooms are usually shaded.

Housing provides clean, airy living for 10,000 persons.

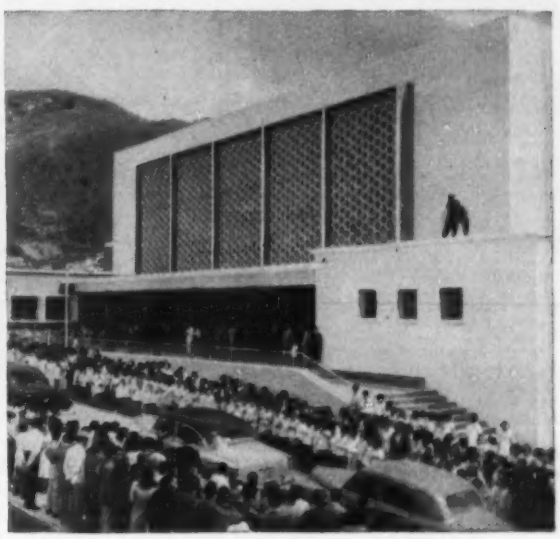

School provides modern facilities for 1,200 pupils.

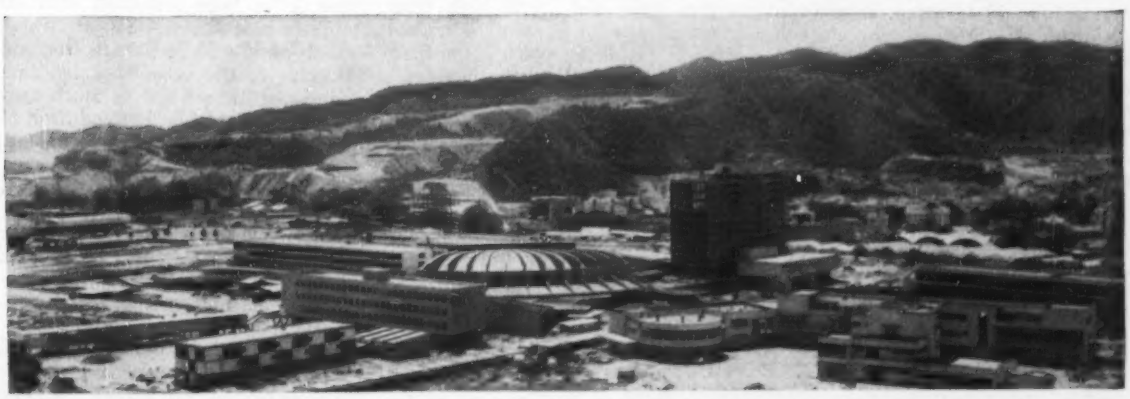

University City of 35 buildings features circular auditorium and tall library. Two large stadiums are at far left.

TUNNEL PORTAL on new Caracas-to-the-sea toll road is ventilation building for the twin tubes housing first axial-flow fans used in a major vehicle tunnel.

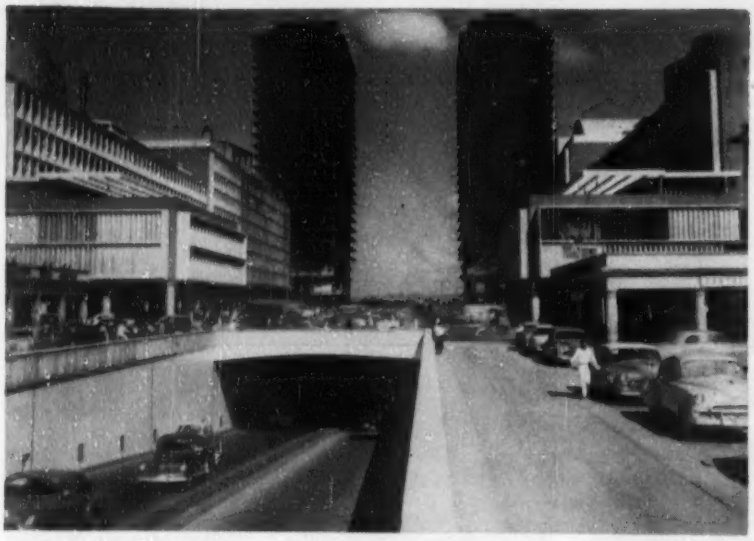

AVENIDA BOLIVAR drops below the new central business district buildings to emerge beyond the skyscrapers and the great plaza pictured at the head of the article.

4-ft center island under which telephone and electric conduits are installed and on which rest the lighting standards whose mercury vapor lamps illuminate the highway for its full length. There is a 5-ft stabilized shoulder on the mountain side of sidehill cuts, and 8-ft shoulders elsewhere, lined at danger points with a 2½-ft guard wall. The right-of-way extends for 250 ft on both sides of the road, and is being landscaped.

Since this new road cuts through mountains in a relatively straight line—it has only 36 curves as compared with 360 on the old road, which wound its way for 18 miles up and down a 6,000-ft ridge—tunnels, bridges, deep cuts and high fills were among its construction features. Two tunnels are required, each a twin-bore to separate opposing traffic. Excavated in rock, they are 5,900 and 1,560 ft long respectively. The bores are horseshoe shaped, 29 ft between inside of vertical walls and 20 ft high from crown of road to intrados. The concrete ceiling, above which is the fresh air duct, is 14 ft above the roadway.

The tunnels are lined with 2 in. of concrete, and the entire inner surface is painted white to reflect the light from two continuous lines of fluorescent tubes on either side. Fresh air supplied by axial-flow fans in the blower buildings, which form the portals of the tunnels, is introduced through slits in the ceiling and is exhausted through the portals by the piston action of the traffic.

In addition, in the upgrade bore of the longer tunnel, horizontal drifts are provided to the open air at the third points of the tunnel length. Exhaust fans in one of these and blowers in the other supplement the portal openings and reduce the size and length of ducts to practicable limits. Full-face drilling and shooting was used to construct the tunnels, which required 900,000 cu yd of excavation.

Because grades are limited to 6%, cuts and fills of extraordinary size had to be used. Thirteen fills range from 78 to 141 ft high, and the maximum cut is 300 ft deep and 900 ft long.

The bridges are in keeping with the other spectacular features of the project. Built of prestressed concrete, they set world's records for this type of construction. Each bridge—there are three of them—contains an open-spandrel concrete arch flanked with viaduct approaches. The arch spans are 498, 476 and 453 ft respectively, in bridges that have overall lengths of 1,013, 830 and 700 ft. The arches were constructed on cable-supported formwork since the highest of them is 220 ft above the valley floor. The design and construction of these unusual structures were described in ENGINEERING NEWS-RECORD, Sept. 11, 1952, p. 28.

Of the total cost of the road, about $23 million went into the tunnels and $5.5 million into the bridges, with the remaining $32 million going to the other facilities. The design and construction work was under the supervision of the Venezuela Ministry of Public Works.

Venezuelan contractors handled all of the work except the tunnels and bridges. The latter were built by the French firm of Campenon-Bernard to designs by Eugene Freyssinet. The tunnels were constructed by Morrison-Knudsen Inc., Boise, Idaho. Smillie and Griffin, New York, were consultants on design.

The Caracas-LaGuaira highway is a toll road, with rates set at a level so that traffic of 6,000 vehicles a day will amortize the cost in 20 years. The old free road probably will remain available to traffic, but since its driving time is an hour compared with 20 minutes on the new highway (where speeds of 50 mph in the fast lane and 35 mph in the slow truck lane are permissible) it will not be much used except for those who like the thrill of mountain driving.

• **New boulevards in Caracas**—Bringing traffic into Caracas faster and in greater volume—as the toll highway will do—pointed up the need for a system of new boulevards in the city itself, where traffic congestion already rivaled the worst in the world.

Such a system is well along toward completion, and important new units were dedicated last month. Among these is a parkway following in gen-

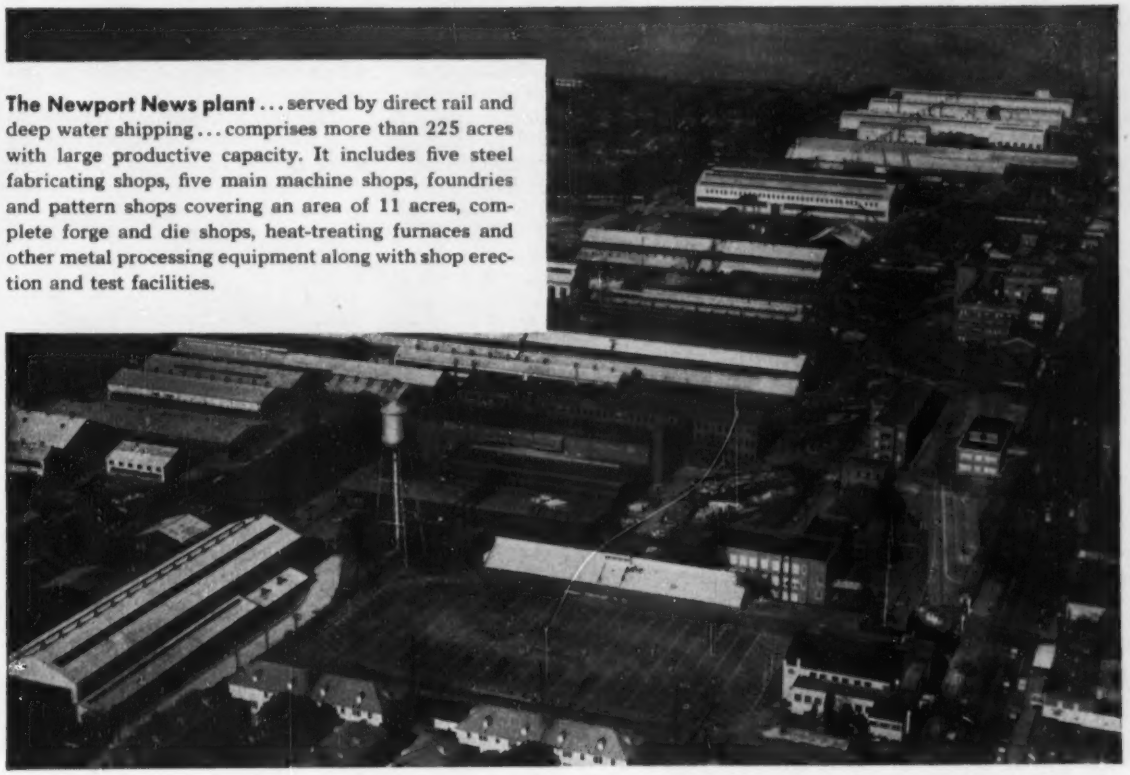

The Newport News plant ... served by direct rail and deep water shipping ... comprises more than 225 acres with large productive capacity. It includes five steel fabricating shops, five main machine shops, foundries and pattern shops covering an area of 11 acres, complete forge and die shops, heat-treating furnaces and other metal processing equipment along with shop erection and test facilities.

Make Newport News your source for fabricated metal structures

Let Newport News fabricate your weldments or sub-assemblies. Call on us for plate fabrication... from vacuum tanks to bridge caissons ... for pumps, valves, pipe lines ... you'll find that Newport News fabricates parts to answer most demands.

In the vast plant, shown above, Newport News craftsmen complete your orders with specialized production techniques, and with sound experience acquired through construction of thousands of products ranging from small components on rayon spinning machines, to the giant 165,000 hp hydraulic turbines at Grand Coulee.

See for yourself what Newport News is doing, and how this company's high integration of skill and production facilities can help you. Get the facts, shown in *Facilities and Products*. A copy of this illustrated booklet is yours for the asking ... write for it now.

Newport News
Shipbuilding and Dry Dock Company
Newport News, Virginia

eral the course of the Guaire River in the narrow east-west valley in which the city is located. The river itself was dredged, straightened and confined in paved and sodded banks over a distance of 2½ miles. To the eastward, the parkway is called the Autopista del Este—the western half goes by the name of Avenida Guzman Blanco.

The Autopista del Este is 3½ miles long and 71 ft wide with a dividing island in the center. It crosses the river twice and, in addition, includes four overpasses at major intersections. One of these gives access to the new University City and to the city's two athletic stadiums while another connects with the section in which the new hotel is located.

The Avenida Guzman Blanco is also 3½ miles long but only 36 ft wide. It provides a new high speed exit from the city westward, and in so doing serves the race track, previously the scene of prolonged traffic jams.

Two other widened and modernized boulevards—the Avenida Roosevelt to the southwest and the Avenida Abraham Lincoln roughly paralleling the Autopista del Este—were opened within the last year.

In this modernized class also is the Avenida Sucre opened ten months ago to be ready to bring traffic from the end of the toll highway at the northwest corner of the city down into the business district. This new boulevard would have compounded an already bad traffic situation had not still another traffic relief project—and the greatest of all—been undertaken. This is the Avenida Bolivar, dedicated last month, which cuts an east-west swath directly through the central business district of the city, connecting with the Avenida Sucre and providing access to the Autopista del Este.

• **Transformed district**—Actually the Avenida Bolivar was not planned solely as a traffic relief route, but as an urban development project that would open up and transform the whole central district of the city. To this end a strip 500 ft wide and slightly over a mile long was cleared of old 16th century buildings and narrow streets. The new 8-lane boulevard was placed in the center of this strip, and plans were drawn to line it with modern office buildings and apartments.

The boulevard is complete, forming what is described as a new backbone for the city, and buildings are completed or under way along the first quarter mile at the west end. Mostly from 4 to 8 stories in height, this initial group is highlighted by a pair of 28-story skyscrapers, by far the tallest in the city. All buildings are interconnected, the two lines of structures on either side of the boulevard by subterranean passageways bordered by shops.

Because these new buildings will generate an even greater concentration of population in the business district, means had to be found to move its traffic efficiently. This is accomplished by depressing the four lanes of fast, through traffic on the boulevard into an underpass that extends for 1,150 ft under the surface street. Local traffic at ground level passes in front of the buildings, with opposing lanes separated by a wide grassed plot, and with other planted areas along the curbs. This ground level roadway passes around the two skyscrapers to rejoin the Avenida Bolivar and the traffic from the underpass farther west.

The boulevard underpass, in addition to providing for through traffic gives access to a central underground bus station for 600 buses and to an underground garage that will accommodate 1,600 cars. At a still deeper level another underpass carries cross-traffic from side streets in a diagonal direction under the development.

One other feature of the project is worthy of emphasis—a great pedestrian plaza on two levels adjoining the east side of the skyscrapers and spanning the boulevard where it emerges from the underpass. The plaza is in effect a great balcony, which will be landscaped like a park and afford a view down the boulevard and over the city to the mountains beyond.

When completed with 24 buildings lining its route, the Avenida Bolivar project will have cost $300,000,000. It is being financed by a special company—jointly owned by the Government Bank Obrero, the Venezuelan Development Corp and the city of Caracas—which has issued bonds secured by rents on the buildings to raise its capital.

• **University buildings**—Gradually taking shape over the last eight years an entirely new University of Caracas was also far enough along last month for thirteen new buildings to be dedicated. Prominent among them was a 13-story library and a great circular, domed auditorium, and included were numerous 3- and 4-story rectangular structures for classrooms and dormitories.

Located on a 370-acre campus, the university will be composed of about 35 different buildings of which 25 are completed and 7 under construction. The buildings will be arranged in groups—medical, engineering, administrative, etc. There will be seven buildings in the engineering group, 4 complete and 3 under way, and included in the medical group is the completed 11-story, 1,250-bed Clinical Hospital. Athletic facilities are concentrated on the west end of the site adjacent to two new city stadiums, which seat 35,000 and 40,000 persons respectively.

The library building is unusual in that its concrete frame is left exposed as an architectural detail. It is windowless for the first seven stories and in parts of the remaining six stories. All curtain walls are of concrete block painted red to contrast with the white frame.

Radial rigid frames comprise the framework of the 135-ft diameter auditorium. Each frame is in effect a cantilever, a steel rod outside of the building tying back to an anchorage. Cantilever canopies around the building also cover part of a plaza which forms the core of the central group of buildings. Architecture tends toward modernistic lines, and all buildings are of reinforced concrete. Carlos Raul Villanueva is the architect and Luis R. Domiani the construction engineer for University City.

• **Luxury living**—Completing the series of large projects in Caracas dedicated last month by the President are an army officers club and a 400-room commercial-resort hotel. The club, a series of interconnected apartments, lounges, ball rooms, patios, swimming pools, a 450-seat theater and other recreational facilities is probably the most magnificent layout of its kind in the world. In sheer luxury it exceeds even the hotel, itself designed to provide the best in all kinds of accommodations.

The new Hotel Tamanaco is also a design and construction achievement of note. Set on a bench carved into the mountainside by 200,000 cu yd of excavation, the hotel is arranged in the shape of a broad V to obtain as many hours of shade as possible for the maximum number of rooms. The ends of the building are stepped to provide terraces for large suites while at the same time imparting an "Inca pyramid" appearance to the structure. Dining terraces, gardens and a swimming pool are grouped in the angle of the V to make a compact arrangement of the whole, and to provide for a maximum of outdoor living. The building is of reinforced concrete, and cost about $8 million dollars. Financed half by the Venezuelan government, one quarter by private local interests and one quarter by the U.S. Export-Import Bank, it will be operated by the Intercontinental Hotels Corp, wholly owned subsidiary of Pan American Airways. Gustavo Guinard of Caracas was the architect and Holabird & Root & Burgee of Chicago, associate architect. Officiana Tecnica Gutierrez & Co, Caracas, was the contractor.

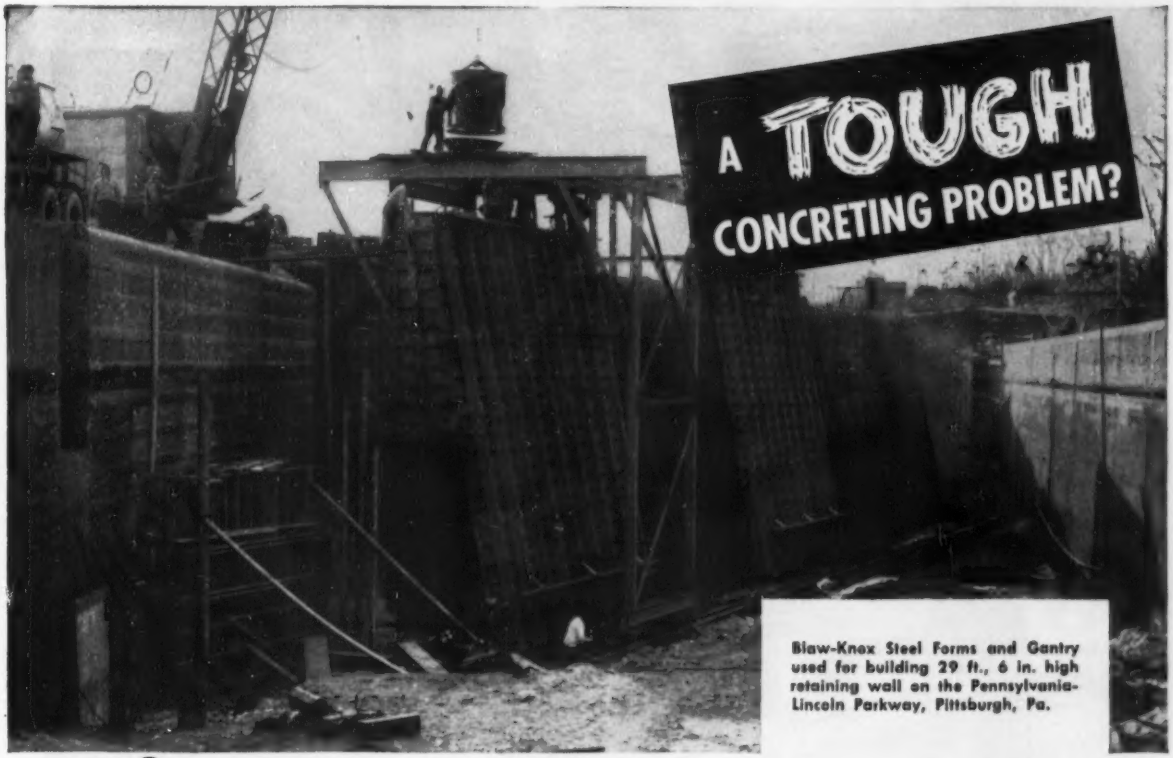

Blaw-Knox Steel Forms and Gantry used for building 29 ft., 6 in. high retaining wall on the Pennsylvania-Lincoln Parkway, Pittsburgh, Pa.

Consult BLAW-KNOX ENGINEERS for the low-cost answer

WRITE FOR BULLETIN 2035

Get complete details about Blaw-Knox Steel Forms and the consultation service that is available to any contractor without obligation.

TAKE advantage of the Blaw-Knox consultation service *before* your plans are drawn or blueprints made—solve your concreting problems before you have them.

Blaw-Knox has the skill and experience of more than 40 years of building Steel Forms for big construction projects. An unusual concreting problem to you may already have been solved by Blaw-Knox engineers who are trained to get to the core of a problem and find a simple, less costly method of solving it. They will recommend the Blaw-Knox Steel Forms designed to fit your job and suggest simplified operating procedures to save you time and money.

Before you start to plan your next job, write, wire or phone for information. Call on the Blaw-Knox consultation service in the *preliminary planning* stage.

STEEL FORMS

BLAW-KNOX

BLAW-KNOX COMPANY
BLAW-KNOX EQUIPMENT DIVISION
2001 Farmers Bank Building
Pittsburgh 22, Pa.

BLAW-KNOX

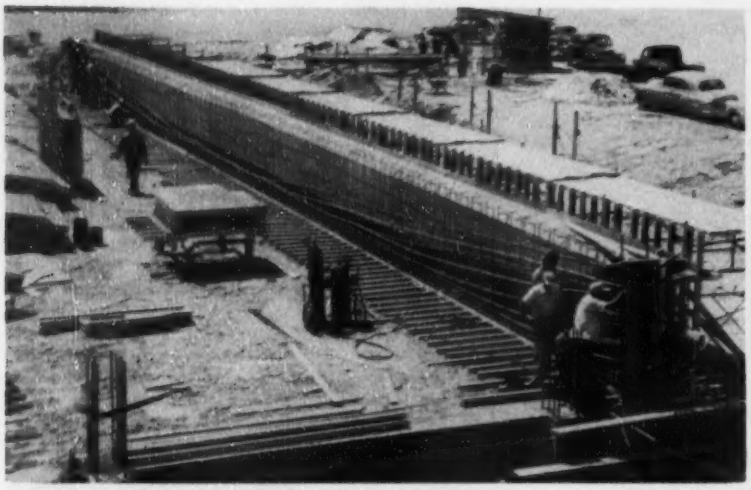

120-ft girders Prestressed roof girders with 120-ft span were precast in plywood forms for a gymnasium in Greensboro, N. C. Stirrups, inserts and prestressing wires were positioned with only one side form in place.

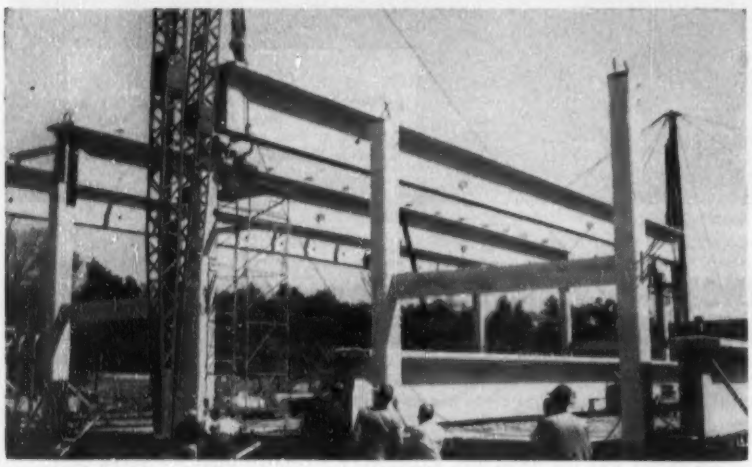

ERECTION of the 120-ft girders was accomplished with guy derricks. Prestressing cables in the columns were passed through the girders to anchor them.

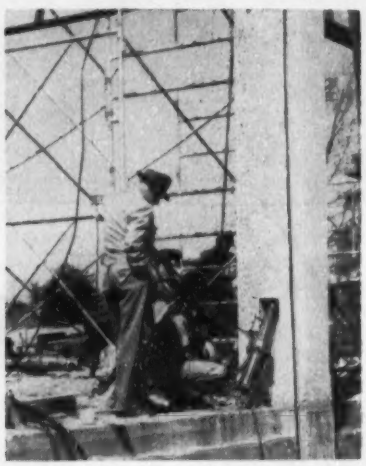

PRESTRESS was applied to the tie-down cables in each column.

Prestressed roof girders set span record

William D. Shea
Chief Engineer
Arnold Stone Co.
Greensboro, N. C.

The longest span prestressed concrete girders to be used to date in building construction in the U. S. have been erected for the Senior High School gymnasium in Greensboro, N. C. The girders span 120 ft.

Precast on the gymnasium floor and prestressed with steel wires anchored at the ends of the members, the members are a modified T-shape in cross section, 73 in. deep. Each girder weighs 63 tons.

[EDITOR'S NOTE—The record span at Greensboro is 26 ft longer than that for the cast-in-place prestressed roof beams over the Bishop DuBourg Catholic High School gymnasium in St. Louis, Mo. (ENR Nov. 19, 1953, p. 29). However, longer girder spans have been used abroad. Prestressed beams span 168 ft, for example, in the roof of a hangar at Melsbroek, Belgium (ENR Feb. 10, 1949, p. 18). These hollow, trapezoidal members with 6-in. thick walls are 9½ ft deep and weigh 300 tons.]

• **Alternate designs bid**—Before a contract was let for the Greensboro gymnasium project, the architects made cost studies for prestressed concrete girders and rigid-frame steel construction. These indicated that prestressing would be less expensive. So the architects started to design for prestressed concrete. Before they could complete the working drawings, however, the prestressed concrete design was made an issue at a meeting of the school board. The dispute led to inclusion of an alternate design with steel trusses. Finally, when bids were received, the low bidders priced the steel alternate $10,000 higher than the prestressed concrete design.

With prestressed concrete, the gymnasium cost $348,500 to construct—$8.50 per sq ft of floor area, $0.44 per cu ft. The general contract was awarded for a low bid of close to $281,000; plumbing, $14,000; heating, $28,000; electrical, $15,000; and the architectural contract, $10,150.

• **Facilities included**—The building is 161 ft square. In the center, at entrance level, is a 118-ft square playing floor. This area is surrounded by a

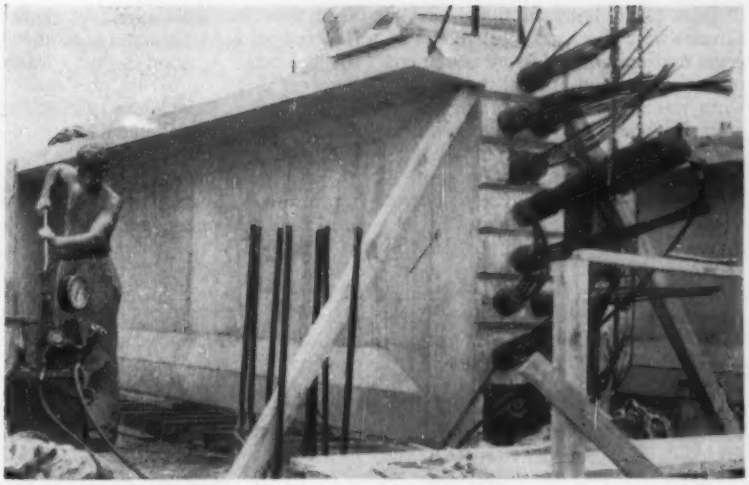

HYDRAULIC JACK tensioned the cables after the concrete gained sufficient strength. Each cable was anchored at girder ends with conical wedges.

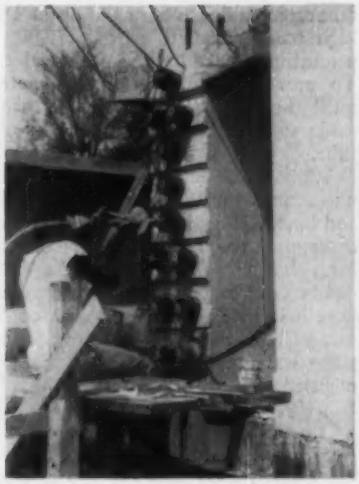

GROUTING the wires under pressure followed to establish bond.

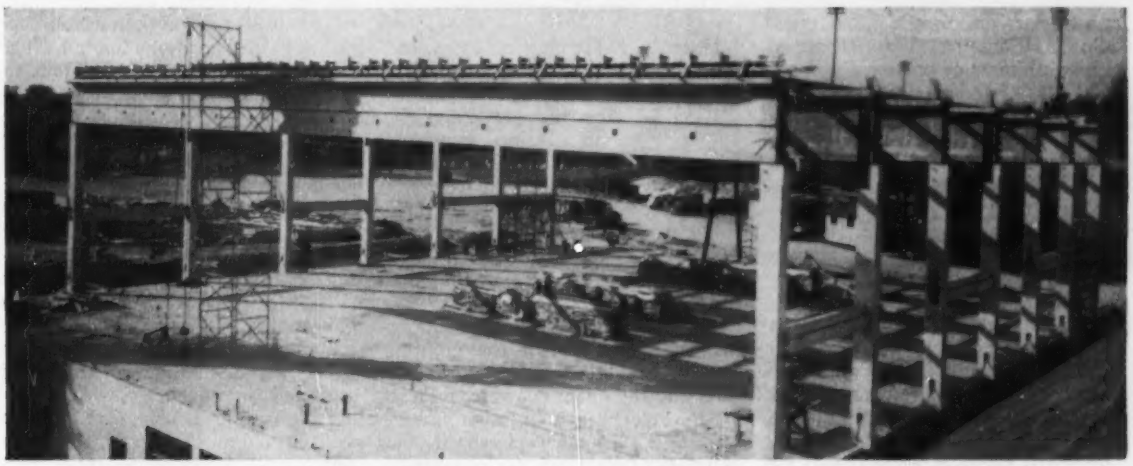

In place Gymnasium spanned by the prestressed girders will have a playing floor 118 ft square unobstructed by columns. The girders will support precast concrete joists, which in turn will carry precast channel-shape deck units.

two-story section, with offices, concessions, toilets, locker rooms and storage space on the first floor. A balcony with a running track surrounds the central core and can be reached by stairways at each corner of the building.

Folding bleachers on the sides of the playing floor and in the balcony make seating available for about 3,500 persons. With additional seating on balcony ends, it is possible to accommodate 5,000.

The building exterior is brick with limestone trim. Windows and doors are built of steel. Interior finish includes exposed brick walls with terrazzo floors in public spaces. Toilets and locker rooms have glazed structural tile walls, and toilets and showers have ceramic tile floors. The playing floor, built over a crawl space, is concrete finished with Michigan hard maple.

• **Girders precast**—The roof over the playing floor is carried on seven 120-ft prestressed, precast concrete girders, spaced 20 ft apart. The two exterior prestressed girders form a clerestory above the lower roof of the two-story section. Elsewhere, reinforced concrete construction was used.

The prestressed roof girders were precast on the playing floor alongside the 18x24-in. concrete columns that were cast in place to support them. To prevent overloading the floor, the casting beds were located adjacent to floor beams. For additional support, shores were placed in the crawl space between these beams and the ground.

• **Few forms needed**—A single set of $\frac{3}{8}$-in. thick plywood side forms was used for all seven girders. Assembled from sections 8 ft long, these forms were braced at 12-in. intervals with 2x4 studs.

The side forms were set against soffits made of 2-in. thick planks. This was supported on 4x4-in. cross pieces, to keep the form bottom off the floor. Only three sets of soffit forms were needed, because they could be removed easily for re-use when the prestressing forces deflected the girders upward.

The forms produced a 73-in. deep, T-shape member, with 48-in.-wide top flange and 8-in. web. The web for its full length was thickened to 18 in. at the bottom. It also was thickened to 18 in. for its full depth over a short distance at both ends of the girder. This was done to provide the required area for bearing where the prestressing steel is anchored, and to distribute the stresses over the cross section.

To simplify placing of prestressing and stirrup steel, bearing plates, inserts for lifting the girder and dowels for anchoring joists, these items were installed with only one side form in position.

Prestressing steel consists of 12 pre-

fabricated cables, each made up of 18 high tensile strength wires (250,000-psi ultimate) 0.196 in. in diameter. To prevent bond with the concrete until the wires were tensioned, each cable was enclosed in a flexible metal tube.

When the second side form was positioned, the two sides were tied and braced. For this purpose, one row of snap ties was used at mid-height; form bottoms were secured to the 4x4-in. base cross pieces, and the tops were held by 2x4's that served as both spacers and ties. Though this form setup was very rigid, it could be dismantled easily and reset.

• **Concreting operation**—To place concrete in the form, an elevated runway was erected level with the top of the form along one side. The runway was connected by a ramp to a lower platform where concrete was dumped from truck mixers directly into buggies.

Specifications called for concrete with an ultimate compressive strength in 28 days of at least 5,000 psi. This was met with a 1:1.5:2.4 mix containing 8 bags of high-early-strength cement per cubic yard and having a water-cement ratio of 0.48. Maximum size aggregate was ¾ in. Slump was specified as 2½ in. maximum and was uniformly maintained by a conscientious and cooperative concrete supplier.

Casting started at one end of a girder, where concrete was placed to the full depth of the form. From there on, concrete filled the forms as casting progressed down the length of the girder.

Internal vibrators were used for compaction. For the first three girders, these machines were supplemented with two external vibrators, one on each side of the form. However, for the last four girders, the external vibrators were abandoned because they appeared to offer little benefit.

Side forms were stripped early the next day and reset for another girder. Early stripping of these forms was considered advisable to permit escape of the heat of hydration of the high-early-strength cement. Immediately after removal of the forms, wet curing began—by covering the concrete with burlap and then spraying down with water.

• **Tensioning the cables**—Prestressing was permitted when the concrete developed a strength of 4,500 psi—usually within six days after casting. Conical wedge anchors were attached to all cable ends. Then, starting with the top cable, each was stressed in succession.

Tension was applied to both ends of a cable simultaneously with a pair of jacks to minimize frictional effects. Stresses were checked both by pressure gages on the jacks and by measurement of steel elongation. Initial stress in the wires was 175,000 psi (working stress, after losses due to various causes, is assumed to be 150,000 psi). Under this condition, specifications permitted an initial compression in the concrete of 2,250 psi and tension of 225 psi. However, under working loads, the concrete was to be subjected to no more than 2,000 psi in compression, no tension due to bending and a maximum diagonal tension of 100 psi.

As the prestressed was applied, the bottom of the girder rested against the soffit form until the sixth cable was tensioned. After that the girder deflected upward until, after the last cable was stressed, it attained a maximum deflection of 1⅜ in. at midspan. Since a 2-in. camber was built into the forms, the girders had a total camber of 3⅜ in.

In applying the prestress to a cable, the jacks, with the wires attached to them with steel wedges, acted against the ends of the girders. When the proper stress was obtained, a second action of the jack drove home the conical wedge to anchor the wires.

Then, cement grout was injected under pressure through a small hole in the male wedge until it squirted freely from a similar hole at the other end of the girder. This assured the complete filling of the tube enclosing the cable. Purpose of the grouting was to establish bond between the wires and the girder concrete, protecting the steel against corrosion and increasing its ultimate-load capacity.

Actual working time for completing a girder was six days. Average elapsed time allowing for bad weather, Sundays and unanticipated delays, however, was about nine days.

• **Fast erection**—The 63-ton girders were erected with a guy derrick at each end, positioned to assure a vertical lift. Actual lifting time from floor to top of the 24-ft high columns took about 1½ min. About 10 min. more were consumed in setting the girders on their bearing plates. To assist this operation, a light steel channel section, temporarily bolted to and extending above each column, served as a guide.

The girders were tied to their columns with tensioned cables. Enclosed in flexible metal tubing to prevent bond with the concrete prior to tensioning, two 12-wire cables were embedded in each column for this purpose. They were anchored near the bottom of the columns and at the top of the girders.

These cables were passed through holes near the ends of the girders while those members were held against the channel guides about 12 in. above the columns. As soon as the girders were set down, a partial prestress of 12,000 lb was jacked into each cable, which then was anchored temporarily with conical wedges.

The bearing on top of the columns was formed with two steel plates. One is a 6-in. wide plate embedded flush with the top of the column with long axis along the center line of bearing. The second, only 2 in. wide, was centered on top of the first plate and supported the girder weight until roof construction was completed. Because of the narrowness of the top plate, the girders could be assumed to act as simply supported beams under dead load.

Later, the spaces between columns and girders were packed with a stiff grout. When the grout hardened, column cables were fully prestressed, to produce a rigid connection for resisting live lloads and wind. The prestress imparted to the columns reduced to a small amount the reinforcing steel needed for bending stresses in the vertical members.

• **Completing the roof**—Major steps remaining for completion of the roof framing following erection of the girders included:

1. A 10-in. thick spandrel beam, or fascia, the same depth of the girders was cast in place at the top of the columns. Embedding the ends of the girders, it braced those members and protected the anchorages.

2. I-shape joists of precast concrete were erected on the top flanges of the girders. To brace these flanges, joist reinforcing steel was welded to dowels embedded in the girder tops. Lower flanges of the girders were braced at third points with precast concrete struts.

3. Precast channel-shape units were placed to deck over the 8 ft between joists. An accoustical insulating membrane had been cast integrally with the deck slabs.

• **Designers and builders**—McMinn & Norfleet, of Greensboro, N. C., were architects for the Senior High School gymnasium. The Freyssinet Co., of New York City, was consultant on the roof design and construction. Work was carried out under the general supervision of Ben L. Smith, superintendent of the Greensboro School Board.

L. B. Gallimore Co., of Greensboro, was the general contractor, with A. J. Hewett as general manager. Arnold Stone Co., of the same city, was the prestressing subcontractor. F. D. Lewis & Son supplied the truck-mixed concrete.

Prestressed concrete construction can increase strength, cut dead weight, save materials, allow longer spans . . .

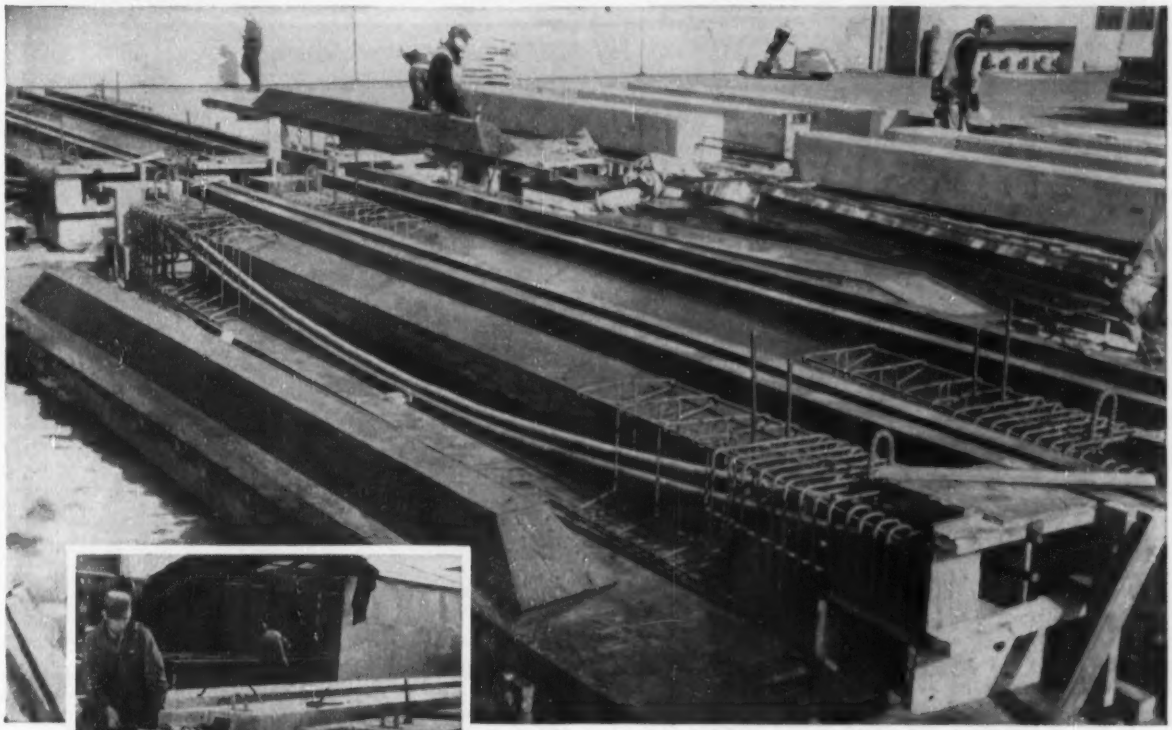

Stressteel Bars placed in forms prior to pouring concrete. Glenn L. Martin Co. Plant, Baltimore, Md.

Jacking operation after concrete has set.

Stressteel Tensioning Bars make Prestressing Practical Now!

Stressteel Tensioning Units now make prestressed concrete construction completely practical and competitive with other types of construction.

Stressteel Tensioning Units are alloy steel bars of extremely high strength, together with suitable anchoring assemblies. Stressteel bars—½" to 1¼" in diameter—are fully capable of carrying the sustained high stresses necessary to prestress concrete. They allow you to place concrete in a permanent state of compression.

Stressteel Units require no special skills, no special handling. Workers simply place them in the form, or in holes previously formed in the beam. The bars are tensioned with hydraulic jacks (available on a rental basis). Depending on length, Stressteel Tensioning Bars may be placed, stressed and anchored with only 25 to 45 man-hours per ton of bars.

You can apply Stressteel Tensioning Units to bridges, building frames, dams, retaining walls, pavements, poles, piles, roof slabs, beams, bulkhead tiebacks, and to reinforce existing concrete structures. Write for the Truscon Stressteel manual listing applications, design data, specifications and procedures.

TRUSCON
MARK OF MERIT PRODUCTS

TRUSCON STEEL DIVISION
REPUBLIC STEEL
1064 ALBERT STREET • YOUNGSTOWN 1, OHIO

TRUSCON® —a name you can build on

(Advertisement)

Pictures of the month . . . by LeTourneau-Westinghouse

HAULS ON CITY STREETS — C Tournapulls often drive through city traffic on their way from job to job. This unit, owned by Skousen-Hise Construction Company, Albuquerque, traveled 190 miles to Farmington, New Mexico, at road speeds of 30 to 35 mph. The 16-yd "C" also works on city streets. Here, on a road widening job, it is hauling 11 pay yards of sand clay 3 blocks through the center of Farmington. Complete cycle takes 4 minutes. Says Operator C. R. Hendrickson, "I travel continuously at a high rate of speed through heavy traffic, yet (with unit's 4-wheel air brakes) can still stop without trouble at stop signs or to avoid accidents."

1 DOES WORK OF 3 — Repairing washout of a North Dakota road, 7-yd D Tournapull and its one operator handle complete job alone. Self-loading, "D" picks up 5 to 7 loose yds from backslope . . . spreads over soft fill . . . dozes into low spots to raise roadbed above flood level. Average output, 100 yds hourly. Similar job nearby took 3 men and 3 crawlers — one for push-loading, one to pull 18-yd scraper, one for dozing fill.

ROLLING GIVES 5½-MIN CYCLE — To take full advantage of their C Tournapulls' 30 mph speeds, Yerrington Constr Co, Parkville, Missouri, rolls, grades and sprinkles haul roads. This careful maintenance pays off always. On this relocation of Rt 32 between Kansas City and Lawrence — good haul roads helped each of their 3 Tournapulls average a 4000-ft cycle every 5½ min.

DOUBLE-DUTY — Vernie Jarl, Gresham, Oregon, by interchanging 18-ton Scraper and Rear-Dump trailing units, works his 4 C Tournapull prime-movers efficiently on both rock and dirt jobs. About Scrapers, Owner Jarl says, "They move dirt cheaper than tractors on any length haul." About Rear-Dumps, his Superintendent, Art Bolder, says, "They're the only rigs that work efficiently in the tight quarters we have here."

(Advertisement)

. . . with performance reports from around the world

5 YEARS, "NEVER FAILED" — Production is high, downtime low on this Tournatractor owned by Miss. State Highway Dept. Unit delivers sand for 770 tons of asphalt daily on dozing cycles of 600 to 1200 ft. Five years old, it still has 2 of original tires. Says Shop Foreman H. B. Lee, "A lot depends on continuous operation of our Tournatractor. It has never failed us."

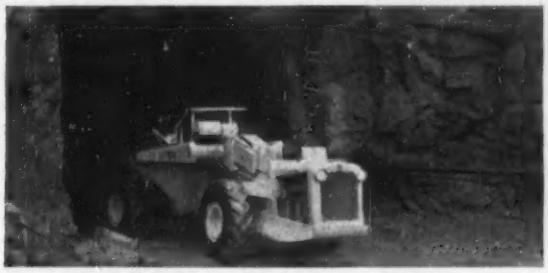

4 MILES FROM ARCTIC CIRCLE — At Jumisko, Finland, 6 Tournarockers are hauling 400,000 yds of granite to excavate 4 miles of tunnels for water power. Winter temperatures drop to 40° below, but units operate 24 hours a day. With 13 ft 9 in. turn radius, they maneuver easily in the 20 ft tunnels.

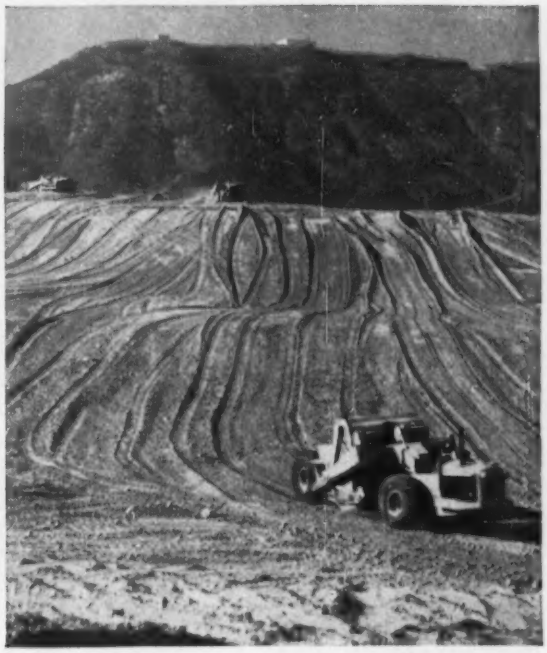

2250', 4.7 MIN — Malcolm Paving Company's 5 C Tournapulls traveled fast down 23% grades to level 192,000 yds for a cemetery addition. Complete 2250 ft cycle took 4.7 minutes. Contractor estimates each Tournapull hauled 10 pay yds of volcanic sand per load, delivered 10 loads per hour, 1000 pay yds per day.

IN A SEA OF MUD — This material being used to build a 115,000-yd bridge approach at Pass Christian, Mississippi is so sticky that trucks sometimes have to be unloaded by hand. Units on job include 5 crawler-tractors ranging from 48 to 163 hp, plus a 186 hp Tournatractor. Dozing fill and grading the roadway, this rubber-tired tractor works so well that R. J. Noland, Job Supt for Southern Foundation Contracting Company of New Orleans, declares "Tournatractor will move twice as much dirt as any crawler equipment." For more information on Tournatractor and other tools shown on these pages, write LeTourneau-Westinghouse Company, Peoria, Ill.

Tournarocker, Tournapull—Trademark Reg. U.S. Pat. Off. Tournatractor—Trademark Plc-556-C

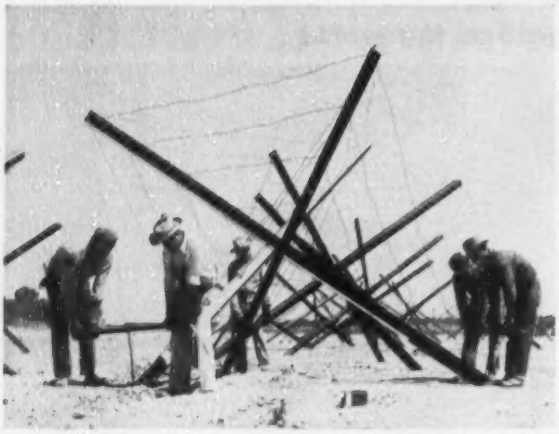

RESEMBLING A JACKSTONE, jetty unit is brought to place, complete with wires strung to connect the assembled arms. Wire ropes tying the units together will be installed later.

SILT AGGRADATION one foot deep was left after first flooding of jetty on Rio Grande near Sandia Pueblo, N. M. Note ¾-in. wire ropes tying jacks together at their centers.

Jack-type jetties protect levees

Work has been completed along the Rio Grande in New Mexico on one of the largest contracts ever awarded for installation of jack-type jetties called Kellner jetties.

Jackson Construction Co. of Rocky Ford, Colo., contractor for the Army Engineers, installed the network of giant steel jacks, wire and cable at seven points along a 65-mi stretch of the river above and below Albuquerque to protect flood control levees against scouring by the restless stream.

A study of this type of jetty was published last summer by the Albuquerque Army Engineer District Office under the title: "Report on Measures for Bank Protection: use of Kellner Jetties on Alluvial Streams."

The Kellner jetty is a patented system of permeable bank protection, to which the Army Engineer report ascribed these advantages: installation costs comparable with or cheaper than other forms, simple installation, and lower maintenance costs.

Army Engineers consider the jetty has proved itself an effective means of stabilizing erodable banks in the silt-bearing streams of the Southwest by forcing the stream to build its own protection for banks and levees instead of scouring them into destruction. The system, according to the report, is flexible enough to retain much of its protective value when undermined by scour.

• **Resembles jackstone**—Structural unit of the Kellner jetty system is a steel jack, so called because of its resemblance to a child's jackstone. The jack consists of three 16-ft lengths of angle steel (4 in. x 4 in. x 16 ft) bolted together at their centers so that each member is at right angles to the other two. The six arms of the resulting big jack form the rigid base of three intersecting planes having a common point at the center of the jack. The planes are developed by interlacing the arms with No. 6 wire. Strands of the wire web connect to each arm at four places.

Jacks are installed in long lines along the area to be protected. When they are spaced 12 ft 6 in., center to center, the spacing of the wire network is uniform through a line of several jacks. Lines are fastened together by threading two ¾-in. steel cables along the line. Cables pass on either side of the center so that jack is firmly held. Cables are anchored at the end of the line to deadmen, usually standard creosoted 6 in. x 8 in. x 8 ft railroad ties buried 4 ft in firm soil.

The Kellner jetty installation is most successful when the line conforms to the existing condition of the river, the Corps of Engineers reports. It works best on the concave bank of a curve in the stream and the jetty line is designed to follow generally the line of the stream. A typical jetty array has two main parts: diversion lines and back-up retard lines. Both phrases refer to lines of Kellner jacks, laced with wire and strung together with anchored cables.

Diversion lines (or mainline jetties) are long lines of jacks placed on the streamward side of the area to be protected. They follow the existing curve of the stream but are usually installed in such a way as to modify the curve in a desired direction. The usual modification is to shorten or straighten the curve. Diversion lines may be one, two or three parallel lines of jacks. They extend above and below the area of bank or levee to be protected so as to prevent outflanking. At either end of the line the two cables become anchor lines, angling toward the bank where they are connected to deadmen.

Back-up retard lines run from the diversion lines back to the bank or jetty to be protected and are usually anchored in the bank or levee. Where the diversion line runs close to the bank, the backup line will be short. Where a considerable portion of a deep curve of the stream is to be cut off and straightened, back-up lines may contain 30 or 40 jacks (350 to 500 ft long). Back-up lines are stretched at an angle to the diversion line (often 45 deg) anchored on the bank at a point upstream from where they connect to the diversion line. Angle and spacing of back-up retard lines depend on the angle at which stream flow attacks the front line of the jetty. If the angle of stream attack is slight, fewer back-up lines are needed. Optimum angle of stream attack is 20 deg. Angle of stream attack also determines the number of lines of jacks in the diversion line, more being needed if the angle is large.

With the jetty array in place, engineers are ready for the sudden, heavy flows which a cloudburst can dump into southwestern streams, or for heavy spring runoff. During a period of heavy flow, water cuts through the jetty lines into the protected area. Slowed by the jack and wire network, the water drops its silt in the jetty field. Future flows will drop more silt and the river gradually builds the necessary bank or levee protection behind the diversion line. Vegetation, which reaches satisfactory growth in two or three years, stabilizes the new aggradation and itself forms a permeable barrier to slow future flood waters in their attack on the original bank. Studies by the engineers indicate that about one foot of aggradation per year can

be expected under average conditions until the newly built up land reaches the flood-stage high-water mark. An extremely heavy flow, however, can leave as much as 3 ft of aggradation.

Kellner jetties are manufactured by Kellner Jetties Co. of Topeka, Kan. The firm was founded by the late H. F. Kellner in the early 1920's. Kellner started his experiments with low-cost, permeable bank protection on small streams in the Topeka area. In the corps' study it is reported that his original jetty unit consisted of three willow poles tied together at the midpoint and laced with wire.

The recently completed project on the Rio Grande involved a total of 5,712 Kellner jacks, installed at seven locations on the river from Santo Domingo, 40 mi north of Albuquerque, to a point below Los Lunas, 25-mi south of Albuquerque. Contract amount was $405,687.

At Chical, a mile south of Isleta Pueblo, a mile-long pilot channel, 100 ft wide, was cut to lead the river in a new direction. Behind the channel a 1½-mi-long training levee was thrown up. Kellner jetties were installed in front of the new levee at the point where the original channel of the river attacks it. Thus, the river has been straightened and 3 mi of curving streambed eliminated. With the exception of the Chical dirt work, the entire contract was for purchase and installation of Kellner jetties.

The seven installations protect a total of 21,240 lineal ft of bank or levee at an average cost of $17.80 per ft. They range in size from 374-jack installation at Santo Domingo which protects 1,410 ft of bank, to the 1,149 units placed opposite the point where Jemez Creek flows into the Rio Grande to protect 4,475 ft of bank.

For cost comparison, the corps selected the Santa Cruz emergency project on the Rio Grande where cellular crib dikes were constructed in 1951. Six dikes 100 ft long were installed to protect 1,400 ft of bank. For additional protection, a single-row Kellner jetty was placed in the streambed in front of the dikes. Cost per lineal ft of bank protected in this project was $20 excluding the Kellner jetty, and $25 including it.

Kellner jetties are considered a permanent type of bank protection. Installations are in existence which have served 30 years and have a reasonable service expectation of 50 years or longer. Installation is simple; common laborers using hand tools can set the units up, string the wire and move the completed units into place in the jetty line. Units can even be moved into place where the jetty line area is under water. A crew of 12 men has proved most efficient.

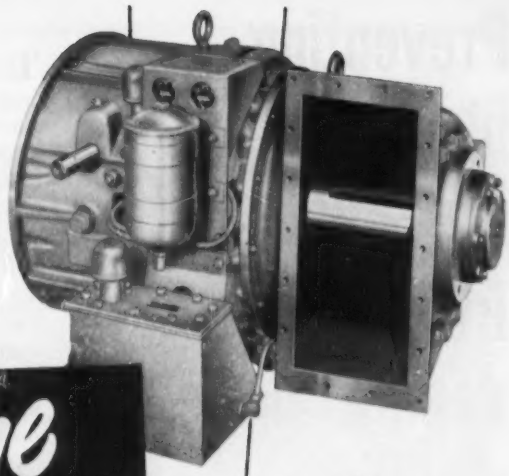

Caterpillar D337 engine (below) equipped with Model CF Torque Converter. Twin Disc Industrial-Type CF Converter (right) available in three sizes, with seven capacities each to handle any type gas or diesel engines from 40 to 1,000 hp.

Torque Converter Drive for your New Power Unit

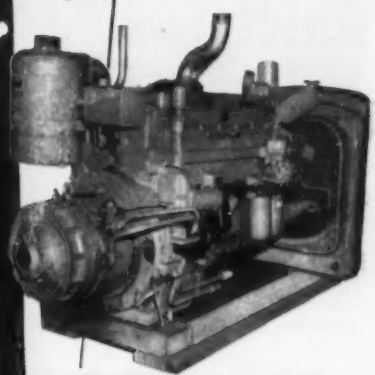

Next time you talk to your engine dealer about that new power unit, ask him about supplying you with a complete Power Unit equipped with a Twin Disc Torque Converter.

Find out how a small additional investment will return multiplied dollars in greater power cycles, lengthened equipment life, easier and more efficient operation . . . with Twin Disc—the Torque Converters that have set the pace throughout industry. Contact your engine dealer . . . today!

Here's what the "Twin Disc-equipped complete Torque Converter Power Unit" provides:

- Picks up heavy loads smoothly without slipping the clutch.
- Multiplies engine torque up to 6 times.
- Absorbs shock loads . . . saves clutches, engines, drive line components.
- No mechanical connection . . . drives through fluid action.
- Engine operates in maximum efficiency range at all times.
- Automatically matches power to load demands.
- Permits "hovering" or holding under power.

TWIN DISC
CLUTCHES AND HYDRAULIC DRIVES

TWIN DISC

TWIN DISC CLUTCH COMPANY, Racine, Wisconsin • HYDRAULIC DIVISION Rockford, Illinois

BRANCHES: CLEVELAND • DALLAS • DETROIT • LOS ANGELES • NEWARK • NEW ORLEANS • SEATTLE • TULSA

Preventing high-volt leaks with PERMUTIT demineralized water

THE 75′ diameter atomic accelerator shown below has five times more power than any other. Its 2200 ton electromagnet quickly whips particles three million times 'round the racetrack to an energy approaching 3 billion electron volts.

Packing all this power into a reasonable-size unit was a problem. Size ruled out air cooling. So the bus-bar magnet coil was made for circulating cooling water.

But at 3,000 volts, the dissolved minerals in *untreated* cooling water could conduct electricity, causing appreciable leakage to grounded piping. A means had to be found for producing water purer than conventional distilled water—at low cost.

A Permutit Demineralizer was selected *(see diagram)*. Cooling water recirculated through this ion exchange unit approaches the very low conductivity of pure water, hence it has been completely effective in removing dissolved solids.

Find out how Permutit can solve your water problems. Write to THE PERMUTIT COMPANY, Dept. ENR-1, 330 West 42nd Street, New York 36, N. Y., or Permutit Company of Canada, Ltd., 6975 Jeanne Mance Street, Montreal.

The giant Cosmotron at Brookhaven National Laboratory.

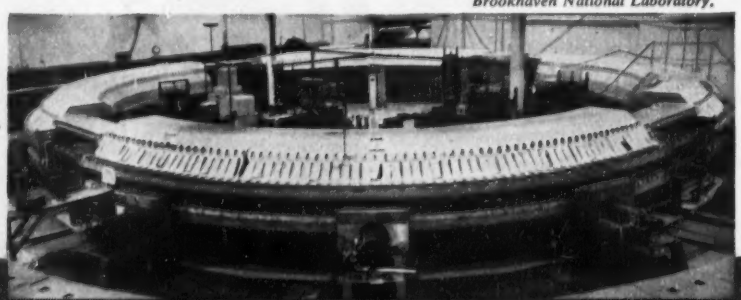

Permutit two-step Demineralizer with Vacuum Deaerator. Troublesome cation impurities are removed in the first step, remaining minerals in the second, oxygen and CO_2 in the final.

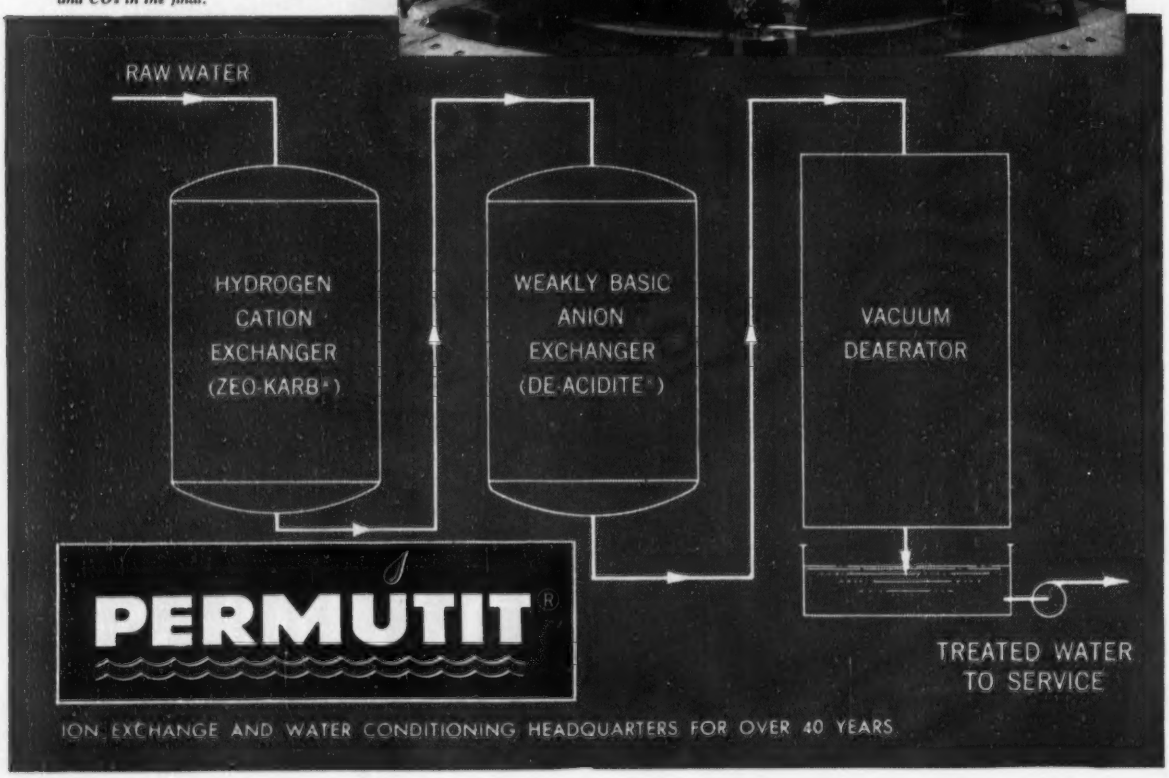
RAW WATER
HYDROGEN CATION EXCHANGER (ZEO-KARB®)
WEAKLY BASIC ANION EXCHANGER (DE-ACIDITE®)
VACUUM DEAERATOR
PERMUTIT®
TREATED WATER TO SERVICE
ION EXCHANGE AND WATER CONDITIONING HEADQUARTERS FOR OVER 40 YEARS

DIFFICULT DITCHING JOB resulted when drillers struck . . .

Photos by Faher

UNDERGROUND LAKE during course of normal tunneling.

Underground lake slows tunnel job

Although Spokane, Wash., may be the last community in eastern Washington to complete its sewage disposal system in the postwar surge of sewer building, the city believes that slow progress may be pardoned.

Notwithstanding the fact that construction operations were started prior to those in other cities, contractors—already coping with hundreds of feet of sewer work in busy downtown streets and the building of three river crossings—unexpectedly hit an underground lake in their tunneling operations.

By the end of this year the project that was to cost $3.2 million is scheduled for completion at a figure of about $4.7 million.

The system design calls for 63,334 ft of sewers, plus 12,000 ft of tunnels.

Plans for a sewage disposal plant in the northwest part of the city—to be a primary treatment plant with chlorination—are being drawn by Greeley & Hansen, of Chicago, under a contract let last January. Originally the plant was to serve 170,000 persons, but it has been expanded to care for a population of 200,000.

• **Complications**—The greatest single headache in the program has been a 6,200-ft concrete sewer tunnel under Trent Avenue where contractors struck an underground lake in an area that, according to preliminary tests, should have been black basalt rock. The complication resulted in a three-week wrangle with the city council over plans to dam the flow.

Contractors Charles A. Power, of Spokane and A. J. Cheff, of Seattle, jointly bid in the section at $755,923 after diamond drilling indicated that they could drive a simple tunnel, six ft per shift through solid rock, then pour the 6,500 cu yd of concrete required. They started Feb. 1, 1951, and pushed uneventfully westward and eastward from the primary shaft through 4,800 ft of rock.

Then, 13 months after beginning the work, on Feb 27, 1953, the tunnel crew struck water where there should have been rock. They pulled the drill, and water trickled onto the rock floor of the passage.

Engineers hoped that it might be a small pocket, but the next shift drilled only four inches and the face before them began to crumble. They scrambled out with cold water rising to their knees. The tunnel maintained a steady 400-gpm volume that carried gravel and boulders with it.

Tunneling was stalled while the contractors sank a shaft to pump out the water, estimated at 3 million gallons. They installed a 1,000-gpm pump, but after several days of pumping, the tunnel was still carrying water.

• **Exploration**—What they had met was an underground "lake", an old coulee filled with saturated gravel that had washed down from the rimrock. Diamond drillings had gone 10 ft deep into solid rock for the length of the tunnel during explorations, but because the "lake" lay 12 ft below the surface, the drills missed locating it by 24 inches.

With the tunnel nearly submerged, the contractors had to discover how big the lake was. They finally decided to drive from the other (west) end of the section until they hit water. This proved a project full of suspense with the tunnel workmen never sure the face wouldn't crack and cause them to be deluged. When they hit water, it again was a trickle and nobody got wet above the ankles.

After a year's work, the tunnel was complete at both ends with a lake in the middle that measured 179 ft. Because the line paralleled the Spokane River, barely 200 ft distant in places, the contractors concluded that river water was seeping into the passage; however, chemical tests and the lowering of the Washington Water Power Co. moat to see if tunnel water low-

(Continued on page 46)

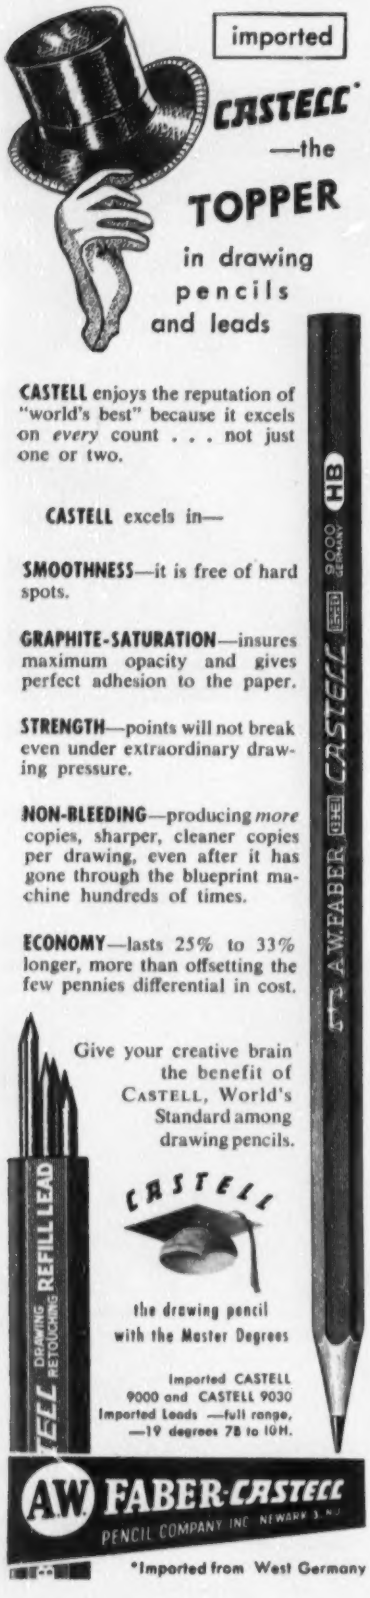
imported
CASTELL
—the
TOPPER
in drawing
pencils
and leads
CASTELL enjoys the reputation of "world's best" because it excels on *every* count . . . not just one or two.
CASTELL excels in—
SMOOTHNESS—it is free of hard spots.
GRAPHITE-SATURATION—insures maximum opacity and gives perfect adhesion to the paper.
STRENGTH—points will not break even under extraordinary drawing pressure.
NON-BLEEDING—producing *more* copies, sharper, cleaner copies per drawing, even after it has gone through the blueprint machine hundreds of times.
ECONOMY—lasts 25% to 33% longer, more than offsetting the few pennies differential in cost.
A.W. FABER CASTELL 9000 HB GERMANY
Give your creative brain the benefit of CASTELL, World's Standard among drawing pencils.
CASTELL
the drawing pencil with the Master Degrees
Imported CASTELL 9000 and CASTELL 9030 Imported Leads —full range, —19 degrees 7B to 10H.
DRAWING RETOUCHING REFILL LEAD
A.W. FABER-CASTELL PENCIL COMPANY INC NEWARK 3, N.J.
*Imported from West Germany

ered with it showed that most of the water was coming from another source.

Grouting to dam the flow seemed a solution, but in 21 days of dispute the city council refused to approve this measure. The grouting might cost $100,000, which the contractors could not afford and the city rejected because the contract provided that the city pay only for grouting in solid rock.

• **Solution**—Power and Cheff finally decided to open-ditch the 179 ft, although it meant partly blockading a busy east-west arterial to do it. Open-ditching brought a new hazard; directly in the ditch lay a Western Union cable, utility lines, a water main and a live sewer. None could be disturbed—and throughout the ditching the transcontinental cable hung in the yawning open cut.

The contractors lined their ditch with interlocking sheet steel piling driven to rock. The lake proved to be 20 ft deep, and that meant blasting below the piling to the invert of the tunnel which was 32 ft below the surface.

At its lowest, the water flowed at approximately 1,250 gpm as the ditch penetrated the lake, but by using the completed tunnel for drainage, enough water was drawn off to permit ditching and concrete work. The final shovel of earth was turned on Sept. 3 and concrete pouring began on the 5-ft 10-in.-high horseshoe-shaped tunnel 4 ft 6 in. wide.

This section was one of 10 (built under 12 contracts) of the Spokane sewage disposal system. Among the first was a 4,260-ft tunnel plus a 14-in. flexible-joint cast iron pipe that was laid beneath the bed of the Spokane River.

The largest remaining section, a 2-mi ditch leading eastward from the troublesome Trent Avenue section, was awarded last fall, leaving only two small legs to complete the job, including a 280-ft river crossing at Post Street.

With the treatment plant as planned, sludge will be digested and vacuum-dried. There will be too little sludge for commercial marketing, but the park department plans to treat the sludge for use as fertilizer for lawns and flowers.

As early as 1930, the late A. D. Butler, former city engineer, and A. I. Buchecker, an assistant, drove through the United States for 2½ months in a city-owned auto studying disposal system designs. On their recommendation, the city council chose Greeley & Hansen to design a system for Spokane. But twice a bond issue failed to pass at public elections, and the proposed system lay shelved until June, 1946, when the voters approved a $1.7-million issue. With

Skyphotos photo

Philadelphia's bid for world air traffic

The recently dedicated, $15-million terminal building at Philadelphia's International Airport will be the center of commercial jet flying, according to Mayor Joseph S. Clark. The 1,100-ft-long structure has a three-story main portion topped by a Civil Aeronautics Administration control tower 105 ft above the ground.

wartime surplus cash and state funds, Spokane officials estimated that $3.7 million would build its disposal system and plant.

The men in charge: for the city, Charles E. Davis, city engineer, and Dwight L. Myers, construction engineer; for the contractor, Elmer Cheff, one of five Cheff brothers and a partner in the A. J. Cheff firm.

Water?—Tucson's got it

Here's a refreshing "change of pace"—there is one city in the U. S. that not only won't worry about a shortage of water for at least 80 years, but could even waste a little if folks were so inclined.

Tucson, the largest city in Arizona to depend upon a pumped supply, has been told that there are an estimated 6.6 million acre-ft of ground water reserves within 300 ft of the surface in the upper Santa Cruz River basin area.

According to Phil J. Martin, Jr., manager of the city's water system, that's sufficient to serve a population equal to Tucson's present 56,000 for 80 years, even though withdrawals from the basin, including those for agriculture, exceed replenishment by 26,717 mg yearly.

Although the basin's reserves are adequate as shown, the city has additional plans for even more reserve that include:

- An untapped source in the upper Avra Valley, 26 mi to the west, from which an estimated 8,000 to 10,000 acre-ft of water may be obtained.
- Acquisition of upper Santa Cruz Basin irrigated lands that, withdrawn from cultivation or used for low-water-demand crops, could add an estimated 40,000 acre-ft annually.
- Utilization of water from the San Pedro Basin near proposed Charleston Dam, 70 mi to the southeast. This could add 3.3 billion gallons. The dam is proposed as part of the Central Arizona Project awaiting congressional approval.

What—no divining rod?

Last year Dallas, Tex., hired a professional rainmaker to seed clouds with silver iodide crystals in the watershed areas of its reservoirs.

When it proved that rainfall increased the city's water supply 363% during the first six months of the year, while, during the same period, the reserves of nearby cities showed little change, Dallas signed a $52,000-contract to continue the rainmaker's services for 1954.

STOP JOINT SEAL FAILURES!

Use HOT-POURED Para Plastic

- *Para-Plastic keeps joints sealed under severest conditions of traffic, temperature*
- *May be pumped directly into joint from melting kettle*
- *Para-Plastic "JF" compound impervious to Jet Fuel or petroleum solvents used in aircraft*

Use Hot Poured Para-Plastic . . . field-proved to be the only effective method of sealing joints with a high degree of permanence. There's no substitute for Para-Plastic . . . nothing equals its sealing performance. It's stable, constant in volume, won't break down and maintains bond under virtually every condition. Para-Plastic can now be pumped directly into the joint from the melting kettle—a fast, simple method of application. Write for details on new method and information on Para-Plastic and Para-Plastic JF.

The only FIELD PROVED METHOD OF SEALING JOINTS



Temperatures to 180° F do not affect Para-Plastic sealing efficiency.

Para-Plastic remains plastic—maintains bond at 0° F.

SERVICISED PRODUCTS CORPORATION
6051 WEST 65th STREET • CHICAGO 38, ILLINOIS

Sparling WATER CONTROL EQUIPMENT

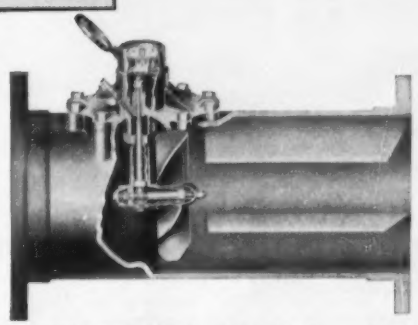

The COMPLETE Totalizing Unit!

for Main-Lines 2-Inch and up Flanged, Bell & Spigot, Threaded
•
Also COMPOUNDS

Install the Sparling Meter as if it were a length of the pipe itself. No further instrumentation is necessary. Accurate registraton is assured for long years of Service and Satisfaction

If and when you want to add Flow Indicators, Recorders or Controls, simply connect to meter without disturbing the installation. Records for from 24 hours to 60 days.

SPARLING METER COMPANY INCORPORATED

Bulletin 312 and quotations are yours for the asking

LOS ANGELES 54.....Box 3277
CHICAGO 8.....1500 South Western Avenue
BOSTON 8.....6 Beacon Street
DALLAS 1.....726 Reserve Loan Life Bldg.
KANSAS CITY 6, MO. ....6 E. Eleventh Street
626 Broadway .....CINCINNATI 2
101 Park Avenue .....NEW YORK 17
1932 First Avenue.....SEATTLE 1
66 Luckie Street N.W.....ATLANTA 3
85 Industrial St.....SAN FRANCISCO 24

Surveyors in Saudi-Arabia use double observations

Surveyors establishing 1000-mi of second-order levels for the Arabian-American Oil Co. in Saudi-Arabia ran two lines, using two sets of rods. One was graduated in meters and the other in feet. But this duplication didn't stem from any desire to "make work" or to satisfy the proponents of both measuring systems.

There were no existing bench marks along the line, so it was considered necessary to adopt an observation procedure with more self-checks than normal geodetic routines require. At each turning point two foot-pins were driven near each other. The metric rod turned on one and the foot-graduated rod turned on the other. The observer read top, middle and bottom wires on both rods (there was a separate recorder for each line), then signaled the metric rodman to give him a back-of-rod reading (normally three times the front-of-rod).

Except for the use of two sets of rods, procedures were modeled after U. S. Coast and Geodetic Survey second-order leveling specifications. Bench marks, located at points that can be spotted from the air, are 5 to 7 mi apart. Less than 1% of the line had to be re-run, and the two lines (metric and English systems) checked each other within 18 cm. The closure figure on existing bench marks at the termini is not known. Work was performed by Aero Service Corp. of Philadelphia.

Coal project in Australia would create port, railways

Construction of a new port and a 75-mi railroad in Northern Australia will be necessary if the Nevin Pacific Co. (a U. S. firm) is successful in its attempt to develop Australian coalfields for export of coal to Japan and other Far Eastern countries.

Nevin Pacific Co. is trying to obtain a $90-million contract from Japan for Queensland coal at less than half the price paid by Japan for U. S. coal. The firm wants to work the large undeveloped coalfields at Nebo near Mackay in Australia and probably would purchase surplus first-class modern coal equipment from an Australian government agency (the Joint Coal Board). Remaining equipment would be imported from the U. S. and Japan.

International briefs . . .

• **River diversion project**—Venezuela's National Institute of Sanitary Work plans to divert the water of the Tuy River, which runs in a loop south of Caracas, into the capital to help solve its critical waters shortage. A four-year project, it will cost an estimated $45 million and take the biggest single bite out of the amount allotted for sanitary works during 1954.

• **Cuban port improvements**—Port improvement in Cuba will be carried out under provisions of a new government plan. Under the program $10 million has been appropriated for extensive port improvements, including dredging work in the Port of Havana and on the Almendares River. Another project scheduled is an extension of the Malecon sea wall in Havana.

• **Sulphur plant slated**—Texas International Sulphur Corp. of Houston has scheduled construction of the second unit of a sulphur plant on Mexico's Isthmus of Tehuantepec. Cost of the project: $7 million.

• **Loan for Brazil hydro**—The International Bank for Reconstruction and Development has made a $10-million loan in Brazil to the Usinas Eletricas do Paranapanema S. A. (a corporation owned almost entirely by the state of Sao Paulo). Money will be used to pay for imported equipment for the construction of a hydroelectric plant at Salto Grande on Sao Paulo's Paranapanema River—and for associated transmission and distribution facilities in both Sao Paulo and Parana. The power will serve rapidly growing agricultural and urban centers and help electrify the Sorocabana Railroad.

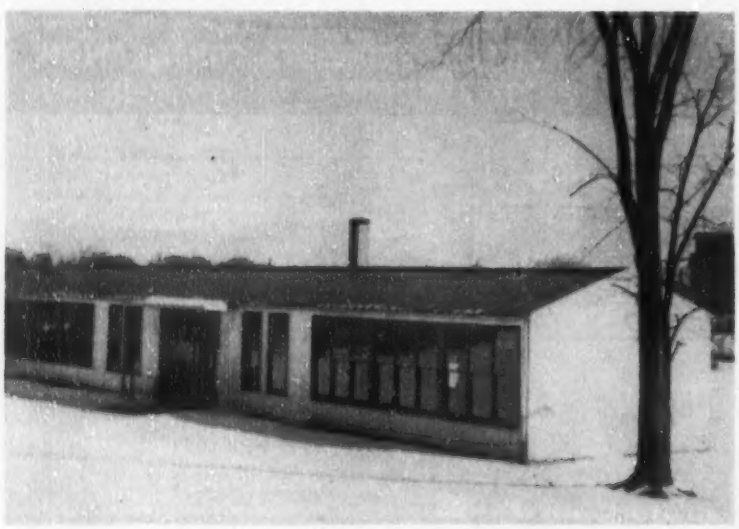

Steel prefabs cut school building costs

Five prefabricated steel buildings, comprising an 11-classroom school, have been fully completed at a cost of $170,000 in Guelph, Ont., Canada (pop. 23,000). Average cost of a similar school facility, made of brick and stone, is estimated at $275,000 in Ontario. Roof and walls of the new buildings and constructed of specially painted and insulated steel panels.

In addition to the 11 classrooms afforded by the five buildings, there is a central unit with offices and a combination gymnasium-auditorium.

With the exception of the gymnasium, all the units are one-story structures with a concrete floor slab on gravel fill. The gymnasium has a basement and a two-story height.

Apart from the saving in cost over the usual brick and stone school construction, the prefabricated buildings will lend themselves to quick removal when the school population changes.

The first two units of the school were designed by the contractor, Wm. Parker, Guelph, and the Guelph Board of Education. Architect for the central unit of the school was Gordon Adamson, Toronto.

QUIET

Do Not Disturb Pipelines

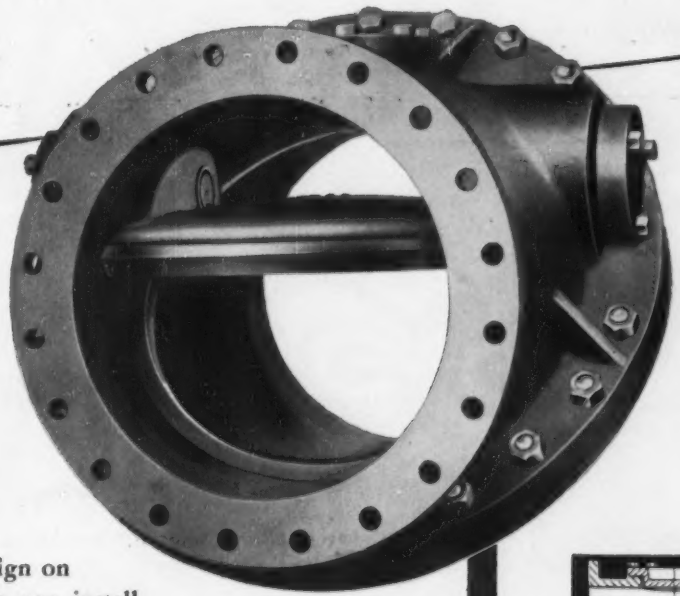

You hang this sign on every line, when you install Chapman Tilting Disc Check Valves. For these unique check valves don't slam or hammer, under usual piping arrangements. And that means no damage to pipeline joints . . . virtually no wear in the valve itself.

Cross section at the right shows you how the airfoil design of the disc makes these valves *keep quiet* all their working lives . . . shows you why, in any installation, head loss is reduced over regular swing-type checks. Send for Publication No. 30, showing charts of test-results at leading engineering laboratories. Write today.

The Chapman Valve Manufacturing Co.
INDIAN ORCHARD, MASSACHUSETTS



Here's why
CHAPMAN Tilting Disc Check Valves
***Keep Quiet* All Their Lives**

This specially designed "airfoil" disc balances perfectly in open position . . . then drops easily to closed position (cushioned by the flow). No jarring or slamming, in usual pipe-layouts. Write for bulletin.

CHAPMAN TILTING DISC **CHECK VALVES**

BLUEPRINT READING for the BUILDING TRADES

Gives intensive training in reading building blueprints quickly, thoroughly. Covers the building trades as a whole and is organized for self-instruction. From the beginning discussion of importance of blueprints to the examination and study of a complete set of working drawings, this book helps you get the most information out of blueprints in the shortest possible time. **By Joseph E. Kenney, Architect, 100 pp., 39 illus., $4.00**

CONSTRUCTION ESTIMATES and COSTS

A practical book that shows you how to estimate construction costs quickly and accurately. Gives step-by-step instructions for estimating construction work of all kinds, including excavations, all parts of buildings, concrete, structural steel, and material transportation, profit, overhead, etc. Includes many illustrative, worked-out estimates of typical jobs. **By Harry E. Pulver, Prof. of Civil and Structural Engineering, Univ. of Wisconsin. Second Edition. 653 pp., 287 illus., and tables, $8.00**

LEGAL PHASES of CONSTRUCTION CONTRACTS

Discusses 46 different legal problems that arise in construction contracts, showing engineers, architects, contractors, and attorneys the attitude courts **have taken toward their problems. Provides cases which are typical** of important legal problems involving construction contracts—giving you a compact manual that can help you avoid the legal pitfalls in your work. Shows actual language of contract provisions . . . quotations from courts' decisions . . . material facts on each case, etc. **By I. Vernon Werbin, Member, New York Bar 267 pp., $5.00**

The BUSINESS of HOME BUILDING

A Manual For Contractors

Explains business methods that make home building more profitable. Gives you "know-how" needed to make a profit with minimum risk to your money . . . a practical **understanding** of economic factors that determine the market for your product . . . the benefit of production knowledge based on the experience of other builders. **By Kenneth B. Johnstone, Carnegie Institute of Technology, and Charles Joern, Wm. Joern and Sons. 289 pp., $5.00**

10 DAYS' FREE EXAMINATION

McGraw-Hill Book Co., 330 W. 42 St., NYC 36

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon—same return privilege.)

- ☐ Kenney—**Blueprint Reading**—$4.00
- ☐ Pulver—**Const. Est. & Costs**—$8.00
- ☐ Werbin—**Legal Phases**—$5.00
- ☐ Johnstone—**Business of Home Building**—$5.00

(Print)
Name .....
Address .....
City .....Zone....State.....
Company .....
Position ENR-1-21

This offer applies in U. S. only

MEN AND JOBS

National Park Service names new directors

Four assistant regional directors of the National Park Service will be promoted to head two new regional offices and two new construction divisions.

Daniel J. Tobin, now an assistant Southeast regional director at Richmond, Va., will be director of the new Northeast Region, with headquarters in Philadelphia. John S. McLaughlin, now assistant director of the Rocky Mountain Region at Omaha, will head the new Central Region from St. Louis offices.

Edward Zimmer, assistant regional director at Richmond, will be chief of the new Eastern Construction Division in Philadelphia. Samford Hill, now assistant director of the Pacific Coast Region at San Francisco, will head the new Western Construction Division, also located in San Francisco.

Directs port development

The Port of New York Authority has promoted Roger H. Gilman from deputy director to director of port development. He succeeds Joseph A. Todd, who resigned recently.

Gilman—who has been with the bi-state agency since 1937—joined the staff as a statistician after receiving his engineering degree from Harvard University.

Careers . . .

• **Naval maneuvers**—Capt. Daniel B. Ventres, special assistant to the deputy chief of the Navy's Bureau of Yards and Docks, has been assigned to the Joint Construction Agency in France. He leaves Washington this month to replace Capt. Henry J. Fitzpatrick on the staff headed by Maj. Gen. George J. Nold.

• **Reality in redevelopment**—The Sacramento, Calif., redevelopment agency—seeking to turn redevelopment of the capital city's slum area into reality—has elected former deputy state highway engineer Fred Grumm as its new chairman. Grumm retired from state service in 1950 to become a consulting engineer.

• **A full-time job**—Maine now has its first full-time chairman of the state highway commission. He is David H. Stevens, former state assessor and a civil engineering graduate of the University of Maine. Under an act passed by the 1953 state legislature, the term of the new office is seven years.

• **His problem: Traffic**—Lloyd M. Braff has resigned as Dallas, Tex., traffic manager to take over as general manager of the Los Angeles traffic department. Ralph T. Dorsey, city traffic engineer who has filled the general manager post on a temporary basis since the department was given separate charter status in May, will retire after having served for 32 years with the city.

• **Presidential election**—Directors of Harza Engineering Co., Chicago, have elected Calvin V. Davis president of the firm, succeeding the late L. F. Harza. E. Montford Fucik is the new executive vice-president; Richard D. Harza was elected vice-president.

• **Public works director**—Warren J. Mann, resident engineer on construction of water and sewage disposal system additions in Raleigh, N. C., has been named director of the city's public works department. He replaces J. B. Lambeth, who has been made chief engineer of the newly consolidated municipal engineering department.

• **Bricklayer to sales manager**—Huron Portland Cement Co., Detroit, Mich., has named its new manager of masonry cement sales: William T. Young. A member of the local bricklayers union, he joined the company in 1949. Since then he has been working in sales promotion departments and doing research on the relation between bond and the surface physics of masonry units.

• **Out of retirement**—John N. Forker has taken over his duties as new executive director of two Pennsylvania State agencies: the General State Authority and the State Highway and Bridge Authority. He retired as vice-president of Koppers Co., Pittsburgh, several years ago.

Mountain memorial

An 8,800-ft peak in Alaska's Mt. McKinley range has been named Mt. Scott in honor of Lt. Gordon D. Scott, Coast and Geodetic Survey engineer of Portland, Ore., who was killed in a plane crash near the peak. The lieutenant (son of John H. Scott, Oregon state highway engineer) was inspecting camp sites in a light plane last June when the craft crashed into a mountain ridge.

OBITUARIES

Irving M. Baker, 57, chief deputy engineer in the office of the engineer of Cuyahoga County, Ohio, died in Cleveland, Ohio, Jan. 7. His engineering work begun in 1915, included railroad, highway, bridge, military, survey and municipal projects. Before joining the county engineer's staff he was for two years with the Ohio Highway Department as assistant in charge of construction and maintenance.

Thomas J. Downey, 55, of Elizabeth, N. J., a civil engineer who specialized in water works and sewer construction, and who was one of the first engineers to become licensed under the license law of 1923, died at Elizabeth Dec. 20. For 20 years he was with C. Salvatore and Sons of Orange, N. J. and was chief engineer. He had been chief engineer of the Bayonne, N. J., sewer project and that of Ewing-Lawrence Township, N. J.

A. H. Pettigrew, 71, a pioneer in the construction of public roads, who retired last summer after 45 years with the Virginia state highway department, died Jan. 4 at Richmond. He was the oldest employe of the department in length of service. For the last 15 years he had been right-of-way engineer.

George H. Purdy, a civil engineer employed by New York State Materials, Inc., died Dec. 24 in Albany.

Daniel R. Lyon, 49, a designing engineer in the Chicago District of the Corps of Engineers, died Jan. 3 in Chicago. He was a 1928 graduate of the University of Illinois.

Ralph R. Ege, 62, an assistant construction engineer for the California Division of Highways in Fresno, died Jan. 1.

William Cartwright Lane, 55, a member of the Maryland State Roads Commission's engineering staff, died Jan. 5 in Baltimore, Md. He served the commission for four years.

Thomas J. Wren, 65, an engineer in the department of public works, Richmond, Va., for more than 30 years, died there Jan. 4.

John P. Collins, 68, a retired engineer who supervised the construction of Pennsylvania's first all concrete highway, died in Sayre, Pa., Jan. 3. During the first world war he was superintendent of the Cramp's shipyard in Philadelphia.

GARY
Welded Grating
with Hexagonal Cross Bars

• This one-piece grating features design, construction, and appearance. The main bearing bars and the hexagonal cross bars are welded, insuring a durable unit. Our method of manufacture results in the tops of all bars being flush.

This particular design of welded grating is made with the main bars on 1-3/16" centers or .915 centers and the cross bars on 4" centers in panels 24" or 36" wide, and lengths to 40'-0".

Special gratings can be furnished with cross bars spaced on 1½"—2½" or 3" centers.

Free SAMPLE

If you will write to us on your company stationery, giving title, we will send you a paper weight size sample.

GARY-GRATING
GARY-STAIR TREADS
GARY-IRVING DECKING

• Representatives in all principal cities. Consult your telephone directory.

STANDARD STEEL SPRING DIVISION
ROCKWELL SPRING AND AXLE CO.
4004 EAST SEVENTH AVENUE GARY, INDIANA

CEMENT GUN COMPANY USES "GUNITE" FOR WALLS OF INDUSTRIAL BUILDINGS

The pictures show the Republic Aviation Corporation building at Farmingdale, N. Y. The walls above the sash and all moniter ends are 2" mesh reinforced "GUNITE" carried on the steel framing. We did this job under plans and specifications prepared by Albert Kahn Associated Architects and Engineers. It is similar to scores of other industrial buildings on which we have built "GUNITE" exterior walls, and in many cases interior partitions.

"GUNITE" provided weatherproof, light-weight, permanent walls for industrial buildings, which fit well into modern industrial architecture. The inside surfaces of the walls are smooth (plywood form surface) and therefore do not collect dust and may be painted as desired.

Many other instances of repair, remodeling and new construction with "GUNITE" are described and pictured in Bulletin A2400. A request, on your letterhead, will bring a free copy by return mail.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES – ALLENTOWN, PA., U. S. A.
MANUFACTURERS OF THE "CEMENT GUN"

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded—First Section—

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y., ELSIE EAVES, Manager
J. A. MAHONEY, M. O. WETZEL, L. M. WINISKI, M. E. SCIORRA, F. S. DEMBEK, Reports.
J. H. WEBBER, M. R. ROESSLER, E. R. HUBER, Statistics.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

NEW HAMPSHIRE—State Dpt. P. Wks. & Hys., State House Annex, Concord,

Marinucci Bros. & Co., Inc., 51 Ceylon St., Dorchester, Mass., CA $528,959, est. $520,000, bridge over Merrimack River at Granite St., U 325 (1) 2757, Manchester. Bids Dec. 22. CD 12/29, under LB.

† **Vermont Paving Co.**, Box 22, Burlington, Vt., LB $95,870, est. $100,000, patching, leveling and resur. bit. pavement, Ethan Allen Air Force Base, IFB 43-600-54-8, WINOOSKI, VT. Purch. & Contg. Officer, Ethan Allen Air Force Base, Winooski, Vt. Bids Jan. 5. CD 12/2.

MASSACHUSETTS—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,

Charles Capone Constr. Co., 32 Wellsmere Rd., Roslindale, Mass. LB $505,480, est. $450,000. Contr. A state hy. constr. Western Artery, Worcester. Bids Jan 5. CD 12/16.

▲ **CONNECTICUT**—State Hy. Comn., 506 State Office Bldg., Hartford,

The Mariani Constr. Co., Inc., 222 Forbes Ave. New Haven, Conn., CA, $1,153,996, est. $1,200,000 bridge across Housatonic River, approaches, Rte. 133 at Southville, Brookfield and Bridgewater. Bids Dec. 21. CD 1/4, under LB.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **E. Turgeon Constr. Co., Inc.**, 42 Weybosset St., Providence, R. I., CA $1,203,855, est. $1,200,000. VETERANS HOME, remodel and addn., Metacom Ave., BRISTOL, R. I. State of R. I. and Providence Plantations, State House, Providence, R. I. Bids Dec. 9. CD 12/16, under LB.

MIDDLE ATLANTIC

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACT

Euclid Contr. Corp., 101 Park Ave., New York 17, N. Y. LB $233,330, Contr. 2879, foundations and incid. work, rehabilitation of Whitehall-South Street Ferry Terminal Bldgs., Manhattan Boro, NEW YORK, N. Y. Comr. Marine & Aviation, Pier 1, North River, New York 4, N. Y. Bids Dec. 21. CD 12/7.

PENNSYLVANIA—State Hy. Dpt., 506 N. Office Bldg., Harrisburg,

Latrobe Road Constr. Inc., P.O. Box 150, Latrobe, Pa., CA $517,346. widen to 22 ft. and surf. new and existing pavement 6.46 mi. in Conemaugh Twp. from near Ferndale Boro southwesterly, U.S. 219, Somerset Co. Bids Dec. 21. CD 12/24, under LB.

Chicago Bridge & Iron Co., 1700 Walnut St., Phila., Pa. LB $189,750, constr. water storage tanks, Phila. State Hospital (Byberry), PHILA., PA. General State Auth., 18 and Herr St., Harrisburg, Pa. Bids Jan. 6. CD 12/15.

MARYLAND—State Rds. Comn., 108 E. Lexington St., Baltimore, Zone 2,

John H. Ensey, 1611 Ridgely St., Baltimore, Md. CA $789,251. grading, drainage 4.246 mi. State Rte. 5, Woods Corner to Clinton, Contr. P 391-10-315, Prince George's Co. CD 12/23, under LB.

▲ **MARYLAND**—State Rds. Comn., 108 E. Lexington St., Baltimore, Zone 2,

F. P. Asher Jr. Sons, Inc., 1715 West St., Annapolis, Md. CA $1,082,325. grading, drainage, surf. 2.636 mi. dual hy., Baltimore National Pike, near Ridgeville, Contr. F 537-2-715, Frederick Co. CD 12/15, under LB.

MARYLAND—State Rd. Comn., 108 E. Lexington St., Baltimore, Zone 2,

Thomas, Bennett & Hunter, Westminster, Md. LB $283,836. grading, drainage, wid'n., surf. 10.2 mi. State Rte. 105, near Baltimore, Contr. HO 258-2-715, Howard Co. Bids Dec. 29. CD 12/16.

▲† **Victor R. Beauchamp, Inc.**, 6837 Fourth St. N.W., Wash., D. C. CA $1,121,529. Schedule B, utilities for N.S.A. constr. proj. on 82 acre site, incl. roads, culverts, water distr. lines, storm drains, sanitary sewers, steam and electrical distr., FORT GEORGE G. MEADE, MD. U. S. Eng., 24 St. and Maryland Ave., Baltimore, Md. CD 12/16.

BUILDINGS

LOW BIDS AND CONTRACTS

Marcello Mezzullo, Inc., 132 Pearl St., Portchester, N. Y., CA Est. $600,000, 2 story SCHOOL, Morris Park and Pilgrim Aves., NEW YORK, N. Y. St. Theresa Church, 1912 Mayflower Ave., New York 61, N. Y. CD 4/10.

Green Constr. Co., 274 Madison Ave., New York, N. Y. CA $867,180, Junior-Senior HIGH SCHOOL, Rte. 32, WOODBURY, N. Y. Bd. Educ., Central School Dist. 1, Towns of Monroe, Woodbury, Blooming Grove, Chester and Tuxedo, School Bldg., Monroe, N. Y. Bids Nov. 19. CD 11/30, under LB.

▲ **George A. Fuller Co.**, 597 Madison Ave., New York, N. Y. CA, $2,500,000, 2 story, 180x760 ft., steel, concrete WAREHOUSE, glass-melting furnace in 120 ft. addn. to main plant, at northeast end of present factory, remodeling employees' CAFETERIA BRIDGETON, N. J. Owens-Illinois Glass Co., Ohio Bldg., Toledo, O. Giffels & Vallet, Inc., 1000 Marquette Bldg., and L. Rossetti, 1000 Marquette Bldg., both Detroit, Mich., engrs.-archts. CD 10/30/46.

Kirby & McGuire, 2518 Greenmount Ave., Baltimore, Md. LB $428,429. 2 story, bsmnt., Belvedere Beach Elementary SCHOOL, Belvedere Beach, ANNAPOLIS, MD. Anne Arundel Co., Bd. Educ., Annapolis, Md. Bids Jan. 5. CD 12/31.

▲ **Sun Constr. Co.**, 2100 Allor Ave., Knoxville, Tenn. CA $4,504,694. Pratt Street HOUSING, Flaghouse Courts, BALTIMORE, MD. Baltimore Housing Auth., 709 E. Eager St., Baltimore, Md. CD 11/18, under LB.

Paul Rice Eng. Co., 2000 Vine St., Baltimore, Md. CA $820,000. central HEATING PLANT for Pratt Street Housing and adjacent existing developments, BALTIMORE, MD. Baltimore Housing Auth., 709 E. Eager St., Baltimore, Md. CD 11/12, under LB.

Victor Posner Developments, 514 St. Paul Place, Baltimore, Md. CA $595,000. 86 brick HOUSES, Inverton, Jasmine and Kavanagh Rds., near DUNDALK, MD. Oneida Realty, Inc., c/o Victor Posner, 514 St. Paul Pl., Baltimore, Md.

▲ **Victor Posner Developments**, 514 St. Paul Place, Baltimore, Md. CA $1,092,000. 146 brick single HOUSES, West Inverness Sect., near DUNDALK, MD. Dalton Realty Inc., c/o builder.

Mullan Contg. Co., 3945 Greenmount Ave., Baltimore, Md. CA $913,000. H-shaped Rosewood State Training SCHOOL, Incl. auditorium, OWINGS MILLS, MD. State, Dpt. P. Wks., 506 Park Ave., Baltimore, Md. CD 12/30.

Kirby & McGuire, 2518 Greenmount Ave., Baltimore, Md. CA $750,000. brick SHOPPING CENTER, Reisterstown Rd. and McHenry St., PIKESVILLE, MD. Wallop, Inc., Pikesville, Md.

SOUTH

BUILDINGS

LOW BIDS AND CONTRACTS

Sullivan & Cozzart, 822 W. Kentucky St., Louisville, Ky. CA Est. $500,000. box FACTORY, LOUISVILLE, KY. General Box Co., 816 S. 16 St., Louisville, Ky. Hammond & Hammond, Washington Bldg., Louisville, Ky., archts. E. R. Ronald & Assoc., 554 S. Third St., Louisville, Ky., engrs.

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $34,000; other public works $60,000; industrial buildings $82,000; other buildings $300,000.

Classes of Construction

(Name in order of Listing)

Water Supply	**Latin America**
Sewers, Waste Disposal	**Public Buildings**
Bridges	**Commercial Buildings**
Streets & Roads	**Industrial Buildings**
Earthwork, Waterways	**Unclassified**

Stages Reported

PROPOSED WORK: Including appointment of engineers or architects.

BIDS ASKED (new announcements only). For full calendar, see also preceding issues of ENR.

LOW BIDDERS: On jobs below $500,000 value all low bidder news will be the final reports published on the projects inviowed except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: Except awards to low bidders previously reported in low bidder stage.

Dates shown are of issue in which last previous report was published.

Symbols and Abbreviations Include:

†	**Federal Government**
▲	**Project of $1,000,000 or over.**
B.A.	**Bids Asked**
ENR	**Engineering News-Record**
CD	**Engineering News-Record Construction Daily**

MIDDLE WEST

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Peerless Builders**, L. Laurence Liss, pres., 18 E. 41 St., New York, N. Y. Owner Builds. $1,250,000. 136-unit APARTMENT, LORAIN, O.

▲ **Sunrise Development Co.**, 5000 Brookpark Rd., Cleveland 29, O. Own Forces. $10,000,000. 560 frame, masonry HOMES, on 15-acre site at Stumpf and Snow Rds.; $1,000,000, 1 story masonry SHOPPING CENTER, parking for 1,800 cars, at Stumpf and Snow Rds., PARMA, O.

Wermuth, Inc., 1036 St. Marys St., Fort Wayne, Ind., general contract;

A. Hattersley & Sons, 212 E. Main St., Fort Wayne, CA, plumbing and electrical work;

Hosier & Pearson, 215 W. State St., Fort Wayne, Ind., CA, heating and ventilating work, CHURCH on 300 block of W. Wayne St., FORT WAYNE, IND. First Presbyterian Church, Dr. John F. Meister, pastor, 201 E. Washington St., Fort Wayne, Ind. Total $829,176. A. Hensel Fink, 1701 Arch St., Phila., Pa., archt. and T. Richard Shoaff, 922 W. Berry St., Fort Wayne, Ind., assoc. archt. CD 5/1/51.

▲ **W. E. O'Neil Constr. Co.**, 2751 Clybourn St., Chicago, Ill., CA $4,873,295, general contract

Cunningham Electric Co., Anna, Ill., CA, $1,230,000 electrical work;

Economy Plumbing & Heating Co., Inc., 1308 S. Pulaski St., Chicago, Ill., CA, $2,430,000, plumbing, heating, ventilating and air conditioning for STATE OFFICE BLDG., SPRINGFIELD, ILL. State Div. Architecture, & Engr., State Capitol, Springfield, Ill. Grand total $8,533,295. Bids Dec. 13. CD 9/24.

Spence Brothers, 417 McCoskry St., Saginaw, Mich. CA Est. $500,000, 2 story, brick, steel high SCHOOL addn., FLINT, MICH. St. John Vianney R.C. Parish Flint, Mich. E. Brielmaier & Sons, 730 N. Wate. St., Milwaukee, Wis., archts.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

Okla., Pauls Valley—B.A. 2/1—City, City Hall, impounding reservoir spillway, pump station and pipe line. $340,000. Plans deposit $20. Lee M. Bush & Co., Colcord Bldg., Oklahoma City, engr. CD 4/20.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

OKLAHOMA—State Hy. Dpt., Capitol, Oklahoma City,

Lyles & Buckner, Commercial Natl. Bldg., Muskogee, Okla., CA $63,957, est. $75,430, 260 ft. continuous I-beam bridge over the Klamichi River near Big Cedar, LeFlore Co.;

Moore Bridge Co., Ada, Okla., CA $317,836. est. $354,694, I-beam span bridge over the Cimarron River Hy. 18 near Cushing, Payne Co. Bids Jan. 5, awarded Jan. 6. CD 12/29.

▲ **OKLAHOMA**—State Hy. Dpt., Capitol, Oklahoma City,

McConnell Constr. Co., 5020 N.W. 16 St., Oklahoma City 7, Okla., CA $164,869, est. $204,698, stabil. aggregate base and double bit, surf. 7.967 mi. Hy. 58, south of Carnegie, Caddo Co.;

Public Constr. Co., Barnes Bldg., Muskogee, Okla., CA $62,394, est. $82,122, stabil. aggregate base and double bit. base 3.129 mi. Hy. 82 near Gideon, Cherokee Co.;

Frix & Foster, Southern Surety Bldg., Muskogee, Okla., CA $437,587, est. $511,393, traffic bound surf. 5.712 mi. Federal Lands Rte. 8082, in Ouachita Forest, LeFlore Co.;

Cohenour Constr. Co., Ardmore, Okla., CA $170,940, est. $203,189, traffic bound surf. 4.033 mi. Federal Lands Rte. 8082 in Ouachita Forest, LeFlore Co.;

W. E. Logan & Sons, Barnes Bldg., Muskogee, Okla., CA $721,763, est. $763,411, traffic bound surf. 5.714 mi. Federal Lands Rte. 8082 in Ouachita Forest, LeFlore Co. Grand total $1,557,553. Bids Jan. 5, awarded Jan. 6. CD 12/29.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Gamble Building Co.**, 1301 W. 3 Ave., Denver, Colo., —Separate Contracts. $2,500,000, 252 one story, frame RESIDENCES, COLORADO SPRINGS, COLO.

FAR WEST

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

ARIZONA—State Hy. Dpt., 17 Ave. and Jackson St., Phoenix,

Phoenix-Tempe Stone Co., Box 1670, Phoenix, Ariz.,

(Continued on page 54)

PLASTIMENT*
CONCRETE Ddensifier

CONTROLS SET AND REDUCES WATER CONTENT WITHOUT INCREASING AIR CONTENT FOR

- **GREATER UNIFORMITY**
- **CRACK RESISTANCE**
- **WATER-TIGHTNESS**
- **SURFACE HARDNESS**

*Plastiment consistently produces higher structural values in concrete because it limits and controls the growth of water-consuming cement gels during mixing and placing of concrete. This action reduces the water-cement ratio and retards the set of all concretes, plain or air-entrained, regardless of type of cement or aggregate. Uniformity of set and water content (the governing factors of uniform concrete quality) are made possible by changing Plastiment proportions with concrete-placing-temperatures and field conditions.

Controlled set and uniformly low water content — exclusive with Plastiment — means less segregation, shrinkage, cold joints and other defects, greater uniformity and resistance to abrasion, cracking and leakage.

Write for your copy of "Plastiment, Concrete Densifier." For specific information on how Plastiment can benefit your own concrete projects, check with our engineering staff today.

SIKA CHEMICAL CORPORATION

PASSAIC, NEW JERSEY

BRANCH OFFICES: PITTSBURGH, SALT LAKE CITY, MONTREAL, PANAMA, CHICAGO • DEALERS IN PRINCIPAL CITIES

Field installations and laboratory tests prove Plastiment's beneficial influence on uniformity, impermeability and resistance to cracking and abrasion.

Plastiment-concrete has been used in many of the world's outstanding projects — floating concrete drydocks, U. S. Navy — concrete ships and barges, U. S. Maritime Commission — Pier 57, New York — the world's largest prestressed concrete bridges and tanks — Metropolitan housing projects, Los Angeles and San Francisco — Gateway Center Buildings, Pittsburgh — and many others.

"BERG"
CONCRETE SURFACER
MODEL A



"Berg" equipment is used extensively for surfacing and finishing applications on concrete construction.

The many "BERG" Models available, permit exact selection for your particular application.

The distinctive "BERG" features give you the kind of results that are realized in better quality work, combined with lower costs.

"BERG" Heads and Attachments are interchangeable, thereby providing adaptability for vibrating, wire brushing, sanding and polishing applications.

THE CONCRETE SURFACING MACHINERY CO.
4667 SPRING GROVE AVE.
CINCINNATI 32, OHIO

MORETRENCH WELLPOINT SYSTEM

guarantees your freedom to

★ WORK unhampered by water
★ EXCAVATE by any method
★ PROGRESS fast
★ SAVE while doing it

"DIG IN THE DRY"

The Moretrench method and equipment are World famous and proved by years of experience. Send for the helpful Moretrench catalog today.

MORETRENCH CORPORATION
90 WEST STREET
NEW YORK 6, NEW YORK
Chicago, Ill. - Tampa, Fla. - Houston, Tex.

(Continued from page 52)

LB, $308,169, clearing, grubbing, grading 8 mi. Kingman-Wickenburg Hy., State Route 93, Mohave Co. CD 6/12/52.

CANADA

BIDS ASKED—BUILDINGS

▲ Alta., Edmonton—PLANT—B.A. 3/1—Imperial Oil Ltd., 56 Church St., Toronto, Ont., lubricating oil plant, incl. solvent extraction plant, solvent dewaxing plant, etc. $5,000,000. R. W. Dunlop, 445 Christina St., Sarnia, Ont., engr. CD 3/4.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ Metropolitan Vickers Electrical Ltd., Trafford Park, Manchester 17, England, CA, $1,500,000 supply 46,000 kw. steam turbo-generator for proposed steam generating plant, Wabamun Village, 40 acre site, near CALGARY, ALTA. Calgary Power Ltd., 140 First Ave., Calgary, Alta. CD 1/4.

Proposed Projects

WATER SUPPLY

▲ Colo., Fort Collins—City, City Hall, bond election in Spring, water system imprvs., incl. filter plant addn., transmission line and exten. water distr. sys. $1,500,000. R. W. Beck & Assocs., Independence Bldg., Colorado Springs, consult. engrs. and archts.

▲ Ky., Newport—City, 4th and York Sts., expansion of WW, addn. pumping units on Ohio River; addnl. filtration units at reservoir and inclosure of clearwater basin, $1,500,000, Stephens Watkins, 251 E. High St., Lexington, consult. engr. Fred L. McLane, WW dir. CD 6/10/49, under LB.

SEWERS, WASTE DISPOSAL

▲ Mass., Shrewsbury—Town, P. Wks., Dpt., Town Hall, sewerage imprvs, treatment plant, 3 pump stations, Ralph Ave., Lake Area, near Quinsigamond Bridge, north end of Jordon Pond, $2,500,000; sewer exten. approx. 20 mi. 8 to 21-in. main, $350,000, Fay, Spofford & Thorndike, 11 Beacon St., Boston, consult. engrs.

STREETS AND ROADS

▲ PENNSYLVANIA—State Hy. Dpt., 506 N. Office Bldg., Harrisburg.
Delaware Co.—constr. expressway to carry U. S. Rte. 13 through city of Chester. $12,000,000. C. H. Bucklus, c/o owner, ch. engr.

▲ UTAH—State Road Comn., 442 State Capitol, Salt Lake City,
Salt Lake Co.—expressway from Salt Lake to North Bountiful, beginning with overpass at Beck's Hot Springs. $2,000,000. CD 12/16.

▲† Washington—National Park Service, Interior Bldg., 19 and C. Sts. N.W., Wash. 25, D. C.,
highway improvements needed to keep roads open to Paradise Valley winter sports area on Mount Rainier. $3,500,000.

▲ Ont., Toronto—Metropolitan Council of Toronto, City Hall, Lake Shore Expressway, $20,000,000. Margison, Babcock & Assocs., 30 Eglinton Ave. E., Toronto, and De Leuw Cather & Co., 150 Wacker Dr., Chicago, Ill., U. S. A. consult. engrs. CD 7/13.

AIRPORTS

▲ † Mo., Sedalia—AIRPORT BUILDINGS, etc.—U. S. Eng., 601 Davidson Bldg., Kansas City 8, Mo., addnl. bldgs., paving, utilities, Sedalia Air Force Base, $4,642,000. J. Gordon Turnbull, 9 E. 45 St., Kansas City, Mo., consult. engr. CD 7/5/51.

▲ Mont., Great Falls—AIRPORT FACILITIES—U. S. Eng., 4735 E. Marginal Way, Seattle 4, Wash., hangar, supply and armament storage, paint storage, crash fire station, motor service shop, motor pool, aircraft parking apron, and utilities, $1,500,000; alert taxiway, $150,000, UHF air-ground facility, $50,000, ammo and shop storage, $100,000, utilities $75,000, alert hangar, $350,000 at Gore Field.

▲† Wash., Whidbey Island—HANGAR—Pub. Wks. Officer, Thirteenth Naval Dist., 1611 W. Wheeler St., Seattle, hangar addn. at Naval Air Station. $1,200,000.

PUBLIC BUILDINGS

▲ Calif., Bakersfield—SCHOOL—Kern Co. Union High School and Junior College District, 312 Bernard St., plans by Ernest L. McCoy, 2811 H St., high school, $3,000,000; plans by Wright, Metcalf & Parsons, 2323 E St., Shafter High School, $500,000. CD 2/6.

▲ Calif., Inglewood—SCHOOLS—Centinela Valley Union High School District, 231 S. Grevillea St., Inglewood. $4,000,000 bond election Mar. 9, schools. CD 11/5.

FOUNDATION CONSTRUCTION

CAISSONS
SHAFTS
DRILLED AND UNDERREAMED
PIERS

SPECIAL DRILLING PROBLEMS

Wire or phone for a quotation on your next foundation job — ANYWHERE IN THE WORLD

McKINNEY DRILLING COMPANY
NACOGDOCHES, TEXAS
Phones: 4-8373 - 4-8477 • P.O.Box 190



GAS STORAGE TANKS

Whether you want the conventional high-pressure units or something special—send us your inquiries. COLE can build you the kind of High-pressure tanks or vessels you require . . . any size, any shape, any metal.

Our 98 years experience in the design and fabrication of metal tanks may be of help to you. Write for catalog—"Tank Talk."

R. D. COLE MFG. CO.
NEWNAN, GA., Established 1854
TANKS • TOWERS • VESSELS
CYLINDERS

▲ **Calif., Oakland**—SCHOOLS—City, City Hall, bond election Mar. 2, reconstr. repairing present school bldgs., $22,852,000 and constructing new schools, $7,148,000. CD 10/30/45.

▲ **Calif., San Francisco**—HOUSING—San Francisco Housing Auth., 440 Turk St., plans by Paul A. Ryan & John Michael Lee, 305 Grant Ave., 226-unit low rent housing on Harbor Slope, $2,250,000. CD 11/20/52.

▲ **Ind., Bloomington**—POWER PLANT—Indiana University, Bloomington, power plant to serve University area, $3,000,000. 9/13/45.

▲ **Mich., Pontiac**—COUNTY—Comrs. Oakland Co., 1 Lafayette St., brick, stone, steel, concrete county bldg. to house county courts and offices, 340 acre site, on West Blvd. $5,000,000. CD 12/24/52.

▲ **Minn., Edina** (P. O. Minneapolis)—SCHOOL—Bd. Educ., M. H. Kuhl, supt., plans by Haxby, Bissell & Belair, 111 Nicollet Ave., Minneapolis, Junior High School, $1,500,000; grade school addn., $300,000-$350,000. CD 2/27/51.

▲† **N. M., Las Cruces**—WAREHOUSES—U. S. Eng., Box 1538, Albuquerque, five warehouses, White Sands Proving Ground, Inv. No. 29-005-54-65. $1,000,000-$3,500,000. CD 8/28/51.

▲ **N. Y., Brooklyn**—LIBRARY—Bd. Higher Educ., 695 Park Ave., New York, Zone 21, plans by Chapman, Evans & Delehanty, 50 Broadway, New York, Zone 4, Brooklyn College Library, 2895-2955 Bedford Ave. $2,000,000. CD 2/8/45.

▲† **Va., Radford**—BAGGING FACILITIES—U. S. Eng., foot of Front St., Norfolk, addnl. bagging facilities at New River Arsenal. $17,000,000. Mills, Petticord & Mills & Assoc., 3308 Fourteenth St. N.W., Wash., D. C., engrs.-archts. CD 6/20/52.

▲ **Va., Richmond**—SCHOOLS—Henrico County School Bd., 22nd and Main Sts., voted $4,000,000 bonds Dec. 30, schools. $6,435,000. CD 12/18.

▲ **Alta., Calgary**—POWER PLANT—Calgary Power, Ltd., 140 First Ave. W., steam power plant near here at Wabamun Village, 40-acre site. $10,000,000.

▲ **Man., Churchill**—GRAIN STORAGE—National Harbors Bd., Parliament Bldgs., Ottawa, Ont., grain storage facilities at Churchill Seaport on Hudson Bay, to double capacity to 5 million bushels. $2,000,000.

COMMERCIAL BUILDINGS

▲ **Calif., Sacramento**—DWELLINGS—Larchmont Village, 2894 Rowena Ave., plans by Wm. M. Bray, 962 N. La Cienega St., Los Angeles, 3,000 frame dwellings in vicinity of McClellan Field, $20,000,000.

▲ **Conn., New Haven**—SHOPPING BLOCK—Morton Realty Co., David Carben, pres. and treas., 172 N. Main St. West Hartford, plans by Irving W. Rutherford, 49 Garden St., Hartford, 2 story, with stores on 1st floor, offices on 2nd floor, 100,000 sq. ft. floor area, shopping block with large parking space, on 9-acre tract, Bishops Corner, $1,600 000.

▲ **Kan., Kansas City**—HOSPITAL—St. Margaret's Hospital, 8 and Vermont Sts., hospital addn. $2,500,000.

▲ **Mich., Lansing**—HOSPITAL—St. Lawrence Hospital Bd. Trustees, 1210 W. Saginaw St., brick, steel, concrete hospital addn. $1,700,000.

▲ **Tex., Houston**—BANK, etc.—Second National Bank of Houston, 800 Main St., plans by Kenneth Franzheim, 2402 Crawford St., 24 story, bsmnt. bank and office, first 4-floors 250x250 ft. and the 20 story tower above will contain 380,000 sq. ft. steel frame, granite on brick constr. $5,000,000; parking garage adjacent to bank, $500,000. H. E. Bovay, Jr., M. Esperson Bldg. and Reg. F. Taylor, Bankers Mortgage Bldg., and Ward Butterwick, 2303 LaBranch St., consult. engrs.

▲ **Va., Alexandria**—RESIDENCES—Ornstein Constr. Co., 1025 Vermont Ave. N.W., Wash., D. C., plans by Berla & Abel, 1636 Connecticut Ave. N.W., Wash., D. C. 96 two story bsmt., masonry residences. $1,500,000.

▲ **Wis., Kenosha**—SCHOOL, etc.—Regional Diocesan High School, 2000 W. Wisconsin Ave., Milwaukee, Zone 3, plans by Mark F. Pfaller Assocs., 7613 W. State St., Wauwatosa, Zone 13, Central Catholic High School and Convent, $2,000,000.

▲ **Que., Granby**—MODEL TOWN DEVELOPMENT—Doris Robert & George Avery, 149 St. George St., plans by Tremblay & Belanger, 135 Principale St., model town development, incl. 200 houses, 6 apartment blocks, 30 stores, theatre, etc., Mont-Sacre-Coeur east section of town, $2,000,000. CD 10/31/51.

INDUSTRIAL BUILDINGS

▲ **Me., Yarmouth**—POWER PLANT—Central Maine Power Co. 443 Congress St., Portland, 50,000 kw steam power plant approx. $10,000,000.

▲ **Va., Waynesboro**—PLANT—General Electric Co., River Rd. Schenectady, N. Y., 1 and 2 story, 200,000 sq. ft. rein.-con., structural steel, masonry Specialty Control Plant. $2,500,000. Whitman, Requardt & Assocs., 1304 St. Paul St., Baltimore, Md., consult. engrs. CD 11/12.

UNCLASSIFIED

▲ **Mich., Warren**—RACING PLANT—Thoroughbred Turf Club, Dick Frederick, 522 Free Press Bldg., Detroit, will not construct racing plant, track, grandstand, clubhouse, stables, etc., Schoenner and 12 Mile Rd. $3,000,000. Project abandoned. CD 11/7.

the pit: *tough...* 70% ROCK 30% SAND

the machine: Sauerman 2½-cu. yd. slackline cableway excavator

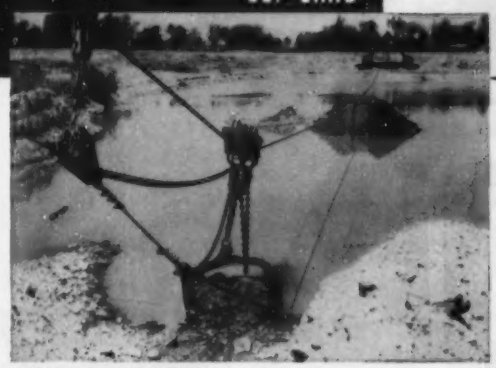

the result:

"...a full bucket every trip"

Another actual field report—Helena Sand & Gravel Co., of Helena, Montana, switched to this Sauerman equipment in 1946. It's been in operation since then . . . successfully performing difficult underwater excavation of rock and colloidal sand where other equipment had failed.

Sauerman Slackline Cableways span water, bogs or pits . . . reach far, dig deep, lift and carry loads to hoppers or cone piles. However tough the pit, Sauerman equipment brings in a good load every trip.

With a Sauerman Slackline Cableway, one man—in safe position—operates a single machine . . . does the complete job, quickly, efficiently, economically! Sauerman Slackline Cableways range from ⅛ to 3½ cu. yds. —span distances up to 1,000 feet . . . handle such materials as sand, gravel, clay, peat, ore and rock.

Write today for more information, including these handy field reports and catalog:

FR-216	**Easy Excavating in a Tough Pit**
FR-213	**Cleaning Ponds Without Draining**
FR-102	**Digging Gravel From a River**
Catalog C	**Sauerman Slackline Cableways**

SAUERMAN BROS., INC. 532 S. Clinton St. Chicago 7, Ill.

SAUERMAN BROS., Inc.

HOT DIP GALVANIZING

YOU can profit by our experience of over 50 years in Hot Dip Galvanizing. Our equipment is modern, our men are skilled and our deliveries and prices are right.

We have galvanized thousands of tons of: gratings, beams, bars, perforated screens, sections, forms, tanks, fittings, rails, fastenings, etc. *Excellent facilities for pickling and oiling.*

ENTERPRISE GALVANIZING CO.

2517 E. CUMBERLAND ST. • PHILADELPHIA 25, PA.

DREDGES

HYDRAULIC
● DIPPER ●
CLAMSHELL

Bolted sectional steel hulls for landlocked, inland waters

If you need a dredge, write us!

AMERICAN STEEL DREDGE CO. INC.
FORT WAYNE 1 · INDIANA · U.S.A.

DESIGNERS AND BUILDERS OF DREDGING EQUIPMENT SINCE 1905

IF IT'S A

PLAY SAFE! ASK FOR A DEWATERING ANALYSIS BY

GRIFFIN

WELLPOINT CORP.

881 East 141st Street, New York 54, N. Y.
Hammond, Ind. Houston, Tex. Jacksonville, Fla.

... if you have a stake in new construction

Dodge Reports tell you where the business is—who to see and when to see them.

Find out now how Dodge Reports can work for you. Write for Booklet "Dodge Reports, How to Use Them Effectively."

DODGE REPORTS

Dept. K-154, 119 W. 40th St., New York 18

Timely, accurate construction news service East of the Rockies

TAKE THE FIRST STEP IN EVERY SALE

F.W. DODGE CORPORATION

Bids—Low Bids—Contracts—Second Section

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

February 9 Massachusetts

STREETS AND ROADS

January 28 Massachusetts

▲† **N. H., Portsmouth**—UTILITIES—B.A. 2/26—U. S. Eng., 857 Commonwealth Ave., Boston, Mass., constr. utilities, heat distr. sys., road and railroad, ENG-19-016-54-59, Air Force Base. $4,000,000. Plans deposit $35. Whitman & Howard, 89 Broad St., Boston, Mass., engrs. CD 12/27/51.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Tredennick-Billings Co.**, 10 High St., Boston, Mass., CA Est. $2,000,000. 202x252 ft., masonry DISTRIBUTION FACILITIES and OFFICE, NEWTON, MASS. General Electric Co., Lamp Div., 50 High St., Boston, Mass. Bids Dec. 21. CD 12/9.

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

January 26 Maryland February 2 New Jersey

STREETS AND ROADS

January 26 Maryland January 28 New York

BIDS ASKED—BUILDINGS

▲ **N. Y., Uniondale**—HIGH SCHOOL—B.A. 2/2—Bd. Educ., Union Free School Dist. 2, Uniondale, Junior-Senior High School. $4,000,000.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **NEW YORK**—Bureau Contracts & Accounts, The Governor Alfred E. Smith, State Office Bldg., Albany, **DelBalso Constr. Corp.**, 500 Zerega Ave., New York, N. Y. CA **$7,162,902**, est. $7,721,000. New York State Thruway-Hudson Sect.-Subd 9A (Nyack Approach to Tappan Zee Bridge); Nyack Interchange, access ramps; New Jersey State Line-Nyack Pts. 3 and 4, S.H. 8136-5682; Nyack Village; Main St. S.H. 9459; Knapps Cors.-Nyack S.H. 5178 and Nine misc. secondary cross roads incl. relocation of railroad tracks 4.46 mi. ACC. 1.57 mi. Thy. H.T. 53-10, R.C. 53-121, S.T. 53-33, Rockland Co.;
Klevens Corp., Federal St., Yonkers, N. Y. CA **$2,515,356**, est. $2,850,000. New York State Thruway-Hudson Sect. Sub 8 (Suffern-Nyack Pt. 1) 0.21 mi. H.T. 53-12, Rockland Co. CD 12/7, under LB.

▲ **NEW YORK**—Bureau Contracts & Accounts, The Governor Alfred E. Smith, State Office Bldg., Albany, **Johnson, Drake & Piper, Inc.**, 86 Trinity Pl., New York 6, N. Y. CA **$6,543,397**. c. conc. pavement, two at 25 ft. variable width, 9.95 mi.; asph. conc. Type 1a, opt 2.85 mi. misc. work 0.08 mi.; five hy. seps. comp I-beams 217.2 ft., 194.5 ft., 175.8 ft., 186.2 ft. and 207.4 ft. 2 bridges, twin box 25 ft. and 25 ft. 2 bridges comp I beams 57 ft. and 57 ft., altering existing railroad bridge 5.94 mi. Access, 6.94 mi. Hy. Palisades Interstate Park-Goshen Pts. 1A and 1B, Central Valley-Turners SH 115; Highland Mills-Monroe S.H. 413; Monroe-Washington S.H. 9057, Proj. F-IG-1050 (7), Contr. 1, F-1050 (8), Cont. No. FASH-53-15, FARC 53-129, Orange Co. Bids Nov. 19, awarded Dec. 17. CD 11/24.

▲ **NEW JERSEY and PENNSYLVANIA**—Delaware River Port Auth., Administration Bldg., Bridge Plaza, Camden, N. J.
Booth & Flinn Co., 1942 Forbes St., Pittsburgh, Pa., LB, **$3,647,075**, Contract No. 3, anchorage superstructures, incl. Schedule "A", Philadelphia Anchorage Superstructure Schedule "B" Gloucester Anchorage Superstructure for suspension bridge over Delaware River connecting Packer Ave. in Phila., Pa. to Gloucester City, N. J. Bids Jan. 13. CD 12/28.

▲ **NEW JERSEY**—N. J. Hy. Auth., State Hy. Office Bldg., 1035 Parkway Ave., Trenton,
Poirier & McLane Corp., 33 W. 42 St., New York, N. Y., CA, **$6,866,065**, 1.95 mi. Garden State Parkway from Arlington Place, E. Orange to D.L & W. R.R. Bloomfield, Contract No. 46, Essex Co. Bids Nov. 19, awarded Dec. 17. CD 11/24, under LB.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Planet Constr. Co.**, 11 W. 42 St., New York 36, N. Y., CA **$2,038,000**. Junior HIGH SCHOOL 117, Willoughby Ave. between Kent and Franklin Aves., BROOKLYN, N. Y. Director Bureau Constr., 49 Flatbush Ave. exten., Brooklyn 1, N. Y. Bids Nov. 18. CD 11/24, under LB.

▲ **William E. O'Neill Constr. Co. Inc.**, 403 Wilson Bldg., Syracuse, N. Y., LB **$3,922,270**, nineteen bldgs. to house instruction, etc. and service connections, VETERINARY COLLEGE, Cornell University, Spec. 17162, 3-4-5-&-6. ITHACA, N. Y. Bureau Contracts & Accounts, The Governor Alfred E. Smith State Office Bldg., Albany, N. Y. Isadore Rosenfeld, 45 W. 45 St., New York, N. Y., archt. Bids Jan. 7. CD 12/24.

▲ **Barkley Homes, Inc.**, 1874 Pratt St., Phila., Pa. Separate Contracts. **$5,000,000**. 200 RESIDENCES, West Norriton Twp., NORRISTOWN, PA. George Hay, Lima, Pa., archt.

▲ **White Constr. Co.**, 95 Madison Ave., New York, N. Y. CA **$8,500,000**, cracker BAKERY, OFFICES and SHIPPING BRANCH, PHILA., PA. National Biscuit Co., 449 W. 14 St. New York, N. Y. Ford, Bacon & Davis, Inc., 39 Broadway, New York, N. Y. engr.-archt. Bids Sept. 15. CD 9/3.

▲ **Charles H. Tompkins Co.**, 906 16 St. N.W., Wash., D. C., CA, **$6,268,000**, 350-bed HOSPITAL, 12 and Varnum Sts., N.E., WASH., D. C. Providence Hospital, 2 and D Sts. S.E., Wash., D. C. Bids Dec. 8, awarded Jan. 8. CD 12/10, under LB.

▲ **Camden-Dover Housing Corp.**, 10521 Pinewood Court, Hyattsville, Md., Separate Coutracts, **$3,000,000**. RESIDENTIAL DEVELOPMENT, Route No. 13, CAMDEN, DEL. Morton Noble, 1019 15 St. N.W., Wash., D. C., archt.

▲ **E. I. du Pont de Nemours & Co.**, Nemours Bldg., Newark, Del., Separate Contracts, **$3,000,000** Polychemicals LABORATORY, NEWARK, DEL. H. M. Gordon, owner's constr. supervisor.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

January 26 North Carolina January 27 Virginia

STREETS AND ROADS

January 26 North Carolina January 27 Virginia

BIDS ASKED—BUILDINGS

▲ **Fla., Chattahoochee** — INFIRMARY — B.A. 2/23 — Florida State Imprvt. Comn., Caldwell Bldg., Tallahassee, Infirmary at State Mental Hospital $2,000,000. CD 9/23.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† **Batson-Cook Co.**, West Point, Ga., LB, **$3,033,931**, Schedule A;
G. A. Paul Constr. Co., 1925 29 Ave. S., Homewood, Ala., LB, **$870,700**, Schedule B;
Kaminer Constr. Co., 303 S. Hudson St., Greenville, S. C., LB, **$695,700**, Schedule C;
Foster & Creighton Co., American National Bank Bldg., Nashville, Tenn., LB, **$732,715**, Schedule D, facilities for Air University, MAXWELL AIR FORCE BASE, ALA. U.S. Eng., P.O. Box 1160, Mobile 7, Ala. Bids Jan. 7. CD 12/15.

MIDDLE WEST

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

January 26 Indiana

STREETS AND ROADS

January 26 Indiana

BIDS ASKED—BUILDINGS

▲ **Mich., Lincoln Park**—WAREHOUSE—B.A. 2/3—State, A. N. Langius, dir. State Bldg. Dpt., Lewis Cass Bldg., 500 S. Walnut St., Lansing, monolithic concrete, corrugated cement asbestos, steel, 240,000 sq. ft. warehouse also brick, steel 10,400 sq. ft. ad bldg. $2,000,000. Plans deposit $50. Leis G. Redstone, 10811 Puritan St., Detroit, Zone 38, and Otis Winn, 524 Michigan Bldg., Detroit, Zone 26, archts. CD 11/17.

▲ **Ill., Bedford Park**—SCHOOL—B.A. 2/10—School District No. 200, Summit, Reavis High School, near here, $2,500,000. L. F. Coleman, 6240 S. Kimbark Ave., Chicago, archts.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Poirot Constr. Co.**, 2001 Pershing Rd., Chicago 9, Ill. CA, **$2,566,855**, PROFESSIONAL SERVICE BLDG. and private pavilion, CHICAGO, ILL. Michael Reese Hospital, Ellis Ave. and 30 St., Chicago, Ill. Bids Dec. 8, awarded Jan. 4. CD 12/18, under LB.

▲ **Sun Builders, Inc.**, 604 Higgins Rd., Park Ridge, Ill., Own Forces, **$9,000,000**. 500 HOMES, near Crawford and Rte. 58, SKOKIE, ILL.

▲ **Young Men's Christian Assn.**, 633 N. 4 St., Milwaukee 3, Wis., rejected bids Nov. 17, CLUBHOUSE, MILWAUKEE, WIS. Est. **$3,500,000**. CD 10/21.

▲ **Harry Slatkin Builders, Inc.**, 11534 Dexter St., Detroit, Mich. Owner Builds. **$3,400,000**. 300 single brick ranch HOMES, Westbrook Sub-division, Trinity, Braile, Pembroke Sts., DETROIT, MICH.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

▲ **Texas-New Mexico**—OIL LINE—B.A. 2/16—Magnolia Pipe Line Co., Magnolia Bldg., Dallas, Tex., 56 mi. 8 in. crude oil line Seminole, Tex. to Gladiola Jct. in Lea Co., N. M. $2,600,000. CD 12/17.

BIDS ASKED—BUILDINGS

▲ **Minn., Hopkins**—SCHOOL—B.A. 2/23—Bd. Educ., R. Child, clk., high school, north of Hy. No. 7 on 13 Ave. $3,000,000. Bissell & Belair, 1111 Nicollet Ave., Minneapolis, archts. CD 12/5/51.

▲† **N. M., Los Alamos**—HOUSING—B.A. 3/3—U. S. Govt. Atomic Energy Comn., c/o Ch. of Procurement Sec., Los Alamos Field Office, Los Alamos, A.E.C. Group 16, 122 one story, wood single housing units, Inv. No. 291-54-10.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† **U. S. Eng.,** foot of Prytania St., New Orleans, La., cancelled bids to have been opened Jan. 13, relocating St. Louis Southwestern Ry. embankment constr. between Texarkana and Naples generally paralleling Hy. No. 67, Texarkana and Naples, Bowie and Cass Counties, Inv. No. 54-112, TEXAS. Est. $2,000,000-$4,500,000. CD 1/7.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Delta Engr. Corp.,** 2121 San Felipe Rd., Houston, Tex., CA $3,250,000. natural gasoline PLANT, SEMINOLE, TEX. Cities Service Oil Co. & Associated Companies, M. Esperson Bldg., Houston, Tex. CD 1/13.

FAR WEST

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

January 28 Washington

STREETS AND ROADS

February 4 California

BIDS ASKED—BUILDINGS

▲ **Ariz., Phoenix**—BANK—B.A. 2/10—First Bank Building Corp. of Phoenix, First National Bank of Arizona, 16 North 1 Ave., 10 story, bsmnt., structural steel, face brick bank. $3,750,000. Plans deposit $150. Robert L. Rolfe, 2401-A Bryan St., and Zumwalt & Vinther, 929 Merchants Security Bldg., both Dallas, Tex., engrs. Wm. D. Reed, archt., 220 Merchants Security Bldg., and H. Edward Smith, planning consulting archt., Merchants Bank Bldg., both Dallas, Tex. CD 10/13/50.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **C. F. Braun Co.,** 1000 S. Fremont Ave., Alhambra, Calif., CA Est. $2,500,000, HYDROBON PLATFORMER to produce premium grade motor fuels, AVON, CALIF. Tide Water Associated Oil Co., Avon, Calif. Universal Oil Products Co., Des Plaines, Ill., engr.

▲ **Theo. G. Meyer & Sons,** Quint and Custer Sts., San Francisco, Calif., CA, $5,302,175, Western Addition HOUSING, Project Cal 1-18, Unit 2, SAN FRANCISCO, CALIF. San Francisco Housing Auth., 440 Turk St., San Francisco, Calif. Bids Jan. 5, awarded Jan. 8. CD 12/2.

CANADA

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

January 26, February 5 Nova Scotia

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Brunet & Brother,** 1 Strathmore Blvd., Strathmore, Que., Owner Builds, $4,000,000. 420 concrete, brick, stone DWELLINGS, RIVIERE DES PRAIRIES (P.O. District MONTREAL) QUE.

▲ **A. & J. Brunet,** 550 Cherrier St., Ile Bizard, Que., Owner Builds, $2,750,000, 300 one story, bsmt., concrete, brick DWELLINGS, RIVIERE DES PRAIRIES, QUE.

LATIN AMERICA

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Raymond Concrete Pile Co.,** 140 Cedar St., New York, N. Y., CA exploratory drilling for harbor imprvs., breakwater, railroads, concrete roads, steel frame bldgs., ACAJUTLA, EL SALVADOR. Comision Ejecutiva del Puerte de Acajutla (CEPA Direccion de Urbanismo y Arquitectura, Avenue sur 74, San Salvador, El Salvador. Total est. $20,000,000. CD 11/16.

AMERICANS ABROAD

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ † **Raymond Concrete Pile Co.,** 140 Cedar St., New York, N. Y., **Walsh Constr. Co.,** 122 East 42nd St., New York, N. Y., and **Brown & Root,** 4100 Clinton Dr., Houston, Tex., U. S. A. CA, Total est. $150,000,000, airbases for Army and Navy, SPAIN Bureau of Yards and Docks, Navy Dpt., 18 St. and Constitution Ave. N. W., Wash. 25, D. C. CD 10/12.

(Proposal Advertisements see pp. 61 and 62)

RUBBING CEILINGS?

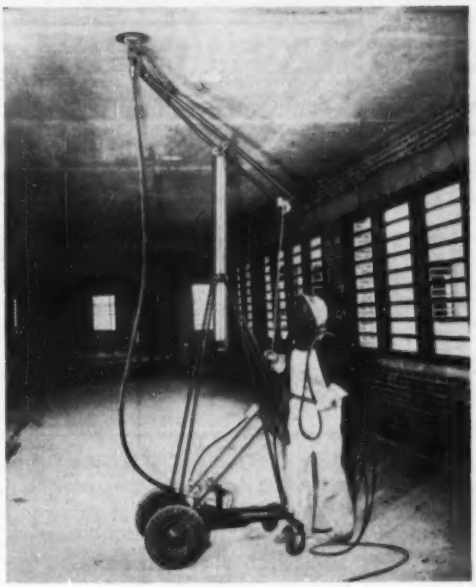

Do it *with a*

GIRAFFE

- **FASTER AND EASIER: One man will average almost 4000 sq. ft. per day. Does not need scaffolding.**
- **CHEAPER AND BETTER: Money saved on finishing will help pay for grinding.**
- **DEPENDABLE: Individual GIRAFFES have worked more than 1,000,000 square feet without major overhaul.**

GIRAFFE

CONCRETE GRINDING CORP.

300 STRAIGHT ST. PATERSON, N. J.

DEPENDABLE

OHIO

LOCOMOTIVE CRANES

DIESEL • GASOLINE • ELECTRIC • STEAM



25 TO 50 TONS CAPACITY

THE OHIO LOCOMOTIVE CRANE CO.

BUCYRUS OHIO

McKIERNAN-TERRY

Wide-Range Line of

PILE HAMMERS and EXTRACTORS



Now made in complete standardized line of 11 double-acting hammers, 5 single-acting hammers and 2 double-acting extractors.

Write for free descriptive Bulletins.

Also builders of coal and ore bridges, bulk material unloaders, bridge operating mechanisms, hoists and marine equipment, and specially designed machinery.

McKIERNAN-TERRY CORP.

13 Park Row New York 7, N. Y.

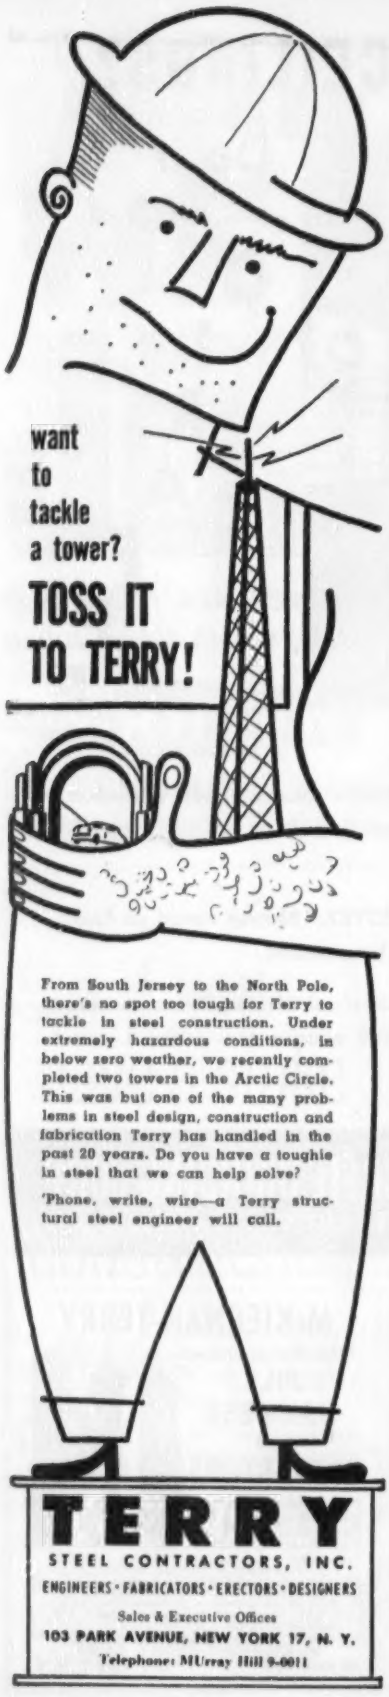
want
to
tackle
a tower?
TOSS IT
TO TERRY!
From South Jersey to the North Pole, there's no spot too tough for Terry to tackle in steel construction. Under extremely hazardous conditions, in below zero weather, we recently completed two towers in the Arctic Circle. This was but one of the many problems in steel design, construction and fabrication Terry has handled in the past 20 years. Do you have a toughie in steel that we can help solve?
'Phone, write, wire—a Terry structural steel engineer will call.
TERRY
STEEL CONTRACTORS, INC.
ENGINEERS • FABRICATORS • ERECTORS • DESIGNERS
Sales & Executive Offices
103 PARK AVENUE, NEW YORK 17, N. Y.
Telephone: MUrray Hill 9-0011

UNIT PRICES

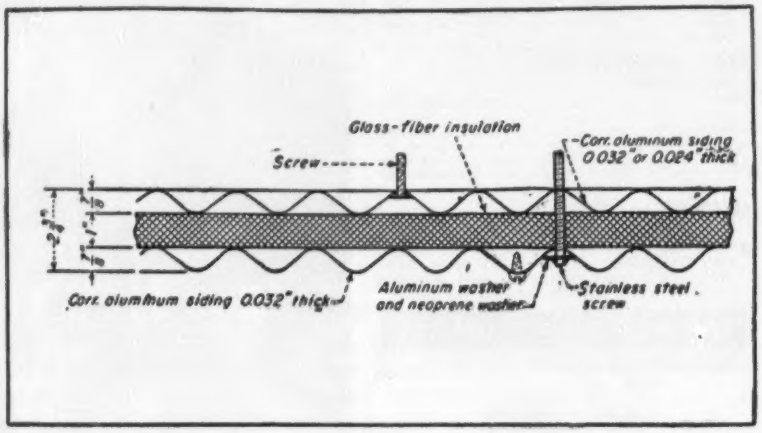

LOW COST MATERIAL—Cross section of corrugated aluminum sidewall panel used in building Air Force forging press plant, Cleveland.

Sandwich sidewall prices—three types

Prices on three new types of sandwich sidewall construction, by type of fastener, have been made available in connection with the building of the Air Force's new heavy forging press plant in Cleveland, Ohio. Six sub-contractors submitted bids on each type to the Aluminum Corporation of America, builder of the plant. Corrugated aluminum emerged as the low-cost material with corrugated asbestos cement and corrugated galvanized painted steel following in the order.

The aluminum sandwich walls consist of two industrial corrugated building sheets, alloy 4S Alclas; one 0.024-in thick for backing and the other 0.032-in thick for facing. A one-inch layer of Fiberglas, type PF-615 provides the insulation.

Corrugated aluminum sandwich wall

Type fastener	No. bids	Price per square foot — Low bid	High bid	Average
Self-tapping screw	1	$1.15	$1.15	$1.15
Nelson stud	3	0.96	1.20	1.10
Widman stop rivet	2	1.03	1.18	1.105
All types	6	0.96	1.20	1.11

The second choice offered to bidders, the corrugated asbestos cement wall, utilizes a 1¼-in Cemesto board as backing and insulation. Standard corrugated cement asbestos is used for facing.

Corrugated asbestos cement sandwich wall

Type fastener	No. bids	Price per square foot — Low bid	High bid	Average
Hook of "J" bolts	5	$1.14	$1.34	$1.24
Nelson studs	1	1.72	1.72	1.72
All types	6	1.14	1.72	1.32

A 20-gauge backup sheet and a 22-gauge facing sheet of corrugated galvanized steel plus a one-inch layer of Fiberglas insulation, type PF-615, comprise the galvanized steel wall option. All galvanized steel sheets are to be painted with one coat of wash primer. Aluminum vinyl paint will be applied to all surfaces before erection and to outside surfaces after erection.

Corrugated galvanized painted steel sandwich wall

Type fastener	No. bids	Price per square foot — Low bid	High bid	Average
Self-tapping screw	3	$1.28	$1.68	$1.47
Nelson stud	3	1.23	1.56	1.396
All types	6	1.23	1.68	1.45

Also included in the architect's specifications was a choice between corrugated plastic or corrugated wire glass in place of the usual sash and glass. Sandwich-wall area in the corrugated plastic design is 157,711 sq ft. In the alternate corrugated wire glass design, the area is 187,180 sq ft. However, despite the fact that the corrugated plastic choice requires twice as much material, it's cost would still be lower than that of the corrugated wire glass.

Contractor	Corr plastic	Corr wire glass
A	$1.01	$2.44
B	1.34	2.58
C	1.21	2.54
D	0.95	3.76
E	1.12	2.89
F	1.04	2.37
Average	1.11	2.76

The plant will be 1,063-ft long and 480-ft wide. Over the 82,000-sq ft press bay it is 100-ft high; over the rest, 52-ft high. McGeorge, Hargett and Associates, Cleveland, are the consulting engineers.

Money: not too difficult to find

Rates won't go higher for next few months, and may go lower, although the decline won't be very steep

J. P. Chamberlain
Associate Editor

Last week in Wall Street, headquarters for many of the country's biggest commercial banks, there were rumors of a cut in interest rates on bank loans. These rumors may just be rumors. Or, if a rate cut comes at all, it might not happen for two or three months. But one thing is sure: Construction money is going to be available for creditworthy borrowers, at fairly easy terms.

Several months back (Sept. 24, '53, p. 21), ENR predicted that there would be no rise in interest rates for as far in the future as anyone could see then—that is, for the next few months. Since then, interest rates have continued to go lower on all forms of borrowing. This week the outlook is still the same: No rise in interest rates, possibly lower rates, though the trend to lower rates will probably not be as strong as it has been recently.

Since September, corporations and local governments—and the U. S. government, too—have been able to get long-term money at lower rates. At the same time, short-term money—of which the most important type is bank loans—has continued to get easier to find. That means contractors with good credit ratings should have no trouble getting financing from banks and finance companies for working capital and for new equipment.

• **Mackinac sells**—Last week, for instance, a big bond issue which proved impossible to sell less than a year ago was offered to investors. That was the $80-million Series A issue of revenue bonds to finance the Mackinac Bridge. Another issue of $20 million Series B bonds, which will have a secondary position where interest and amortization are concerned, is to be offered later. The purpose of splitting the issue into two parts was to improve the credit position of the major part of the issue, while allowing a smaller part to be bought by investors interested in a very-high-paying, speculative, tax-exempt bond.

The success of the Mackinac issue is only one sign of our easy bond market. Last week, for instance, the State of California borrowed the final $50 million to finance its $150-million farm and home loan program for veterans. This time, it cost California only 1.93%. When the initial $100 million of bonds were sold in February 1953, the cost to the state was about 2.42%.

Take another example, this one from the new corporate bond issues. Public Service Co. of Indiana, Inc., sold $25 million of first mortgage bonds last week to one of two hotly competing underwriting groups. The winning syndicate bid a price that meant a borrowing cost to the utility of about 3.27%. The last comparable utility issue, sold on Dec. 2 by Iowa Power & Light Co., cost the borrower 3.33%. This may sound like a small decrease in cost, but it makes a very large difference when several millions of dollars are involved over a long period of time.

• **Short-term money**—The tendency to cheaper money also exists in the short-term field, as shown by the Wall Street rumors about the "prime rate" (the rate banks charge blue-ribbon borrowers on 90-day loans). The prime rate has been 3¼% since last spring, but now might drop to 3%. This is denied by some bankers. But quite a few money-market observers think there might be a cut within the next couple of months. For some time already, banks have been a little less choosy about the customers they class as top-grade risks, and bank vice-presidents have been a bit more eager to pick up the check when lunching with potential borrowers.

Naturally, a change in the prime rate would mean a change all along the line in rates which the banks charge customers. And if one or two big banks in New York City or elsewhere should cut rates, the others would be forced to go along to hold their customers.

• **Background**—What are the reasons behind this easy-money situation? Basically, the reason is that our business superboom has been slowing down for several months. This means there

(Continued on page 60)

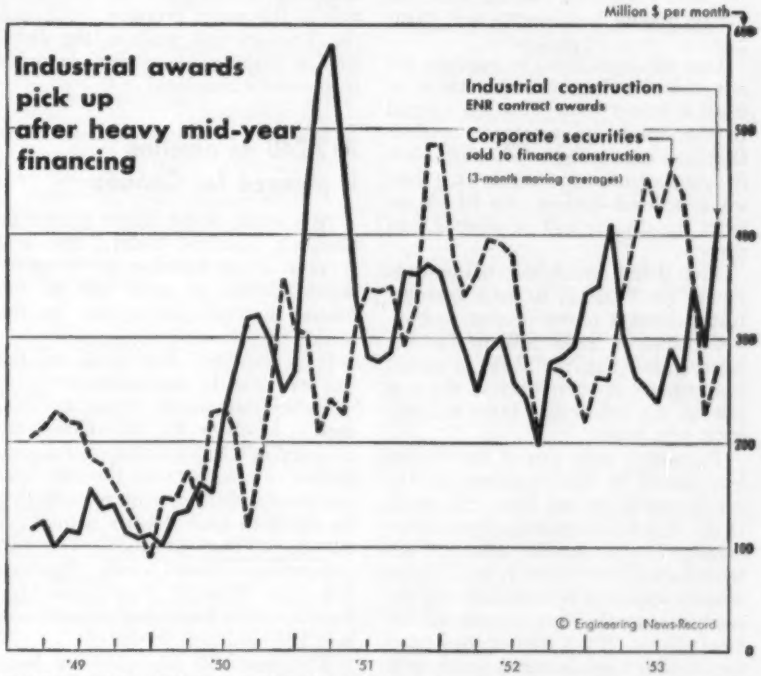

INDUSTRIAL AWARDS FOLLOW BOOM in corporate financing—As often before in the past, industrial awards reported to ENR and the Construction Daily are starting to pick up, following a heavy volume of corporate financing for construction in the middle of 1953.

is less demand for money from corporate borrowers. Take a look at the chart (page 59) to see how corporate borrowing for construction has tapered off in the past few months.

At the same time, there are plenty of funds available to lend. The institutional lenders—insurance companies, commercial and savings banks, savings & loan associations, pension funds—picked up about $15 billion in savings last year. That's a record. Although the inflow of savings to these institutions is now tapering off, it is expected to hold up well in 1954.

So the supply of available money for lending is dropping more slowly than the demand for borrowed money.

This means that lenders are becoming more eager to lend money and borrowers in turn are becoming more coy about borrowing. The result: lower interest rates.

• **Commercial banks**—You can trace this situation very easily in the case of commercial banks. Their primary function is lending short-term money to business. When their business loans drop off, they tend to move over into the bond and mortgage markets. Here they compete with other investors to drive up the price of these long-term debt instruments, making it possible for new borrowers coming into the market to sell bond issues and mortgages at lower interest rates.

Last fall, bank loans to business did not rise anywhere near as much as usual in recent years. That was a signal to the bond and mortgage markets that rates were going to be easier. Now in January bank loans are starting their usual seasonal decline. So far, it appears the decline will be steeper than usual.

The latest available nation-wide report for Federal Reserve member banks shows a record decline in business loans of $438 million for the week ended Jan. 6. That's a record not only for the first week of the year but for any week since these statistics have been kept.

Probably a large part of this decline was caused by the expiration of the excess-profits tax on Dec. 31, which makes it less advantageous (from a tax standpoint) to borrow money. But nevertheless the decline in business loans is expected to be greater for the next few months than is usual for this time of year. If you want a good tipoff on whether bank money is going to be cheaper to borrow, watch the Federal Reserve Board's weekly figures on loans of reporting member banks in leading cities. They are published Thursdays in the financial sections of most big daily newspapers.

• **FRB and Treasury**—Another very important factor in the money situation is the attitude of the Federal Reserve Board and the Treasury. FRB can influence short-term and long-term interest rates by increasing or decreasing the lending power of commercial banks. The Treasury can influence long-term rates by the type of securities it offers when it has to refund maturing government securities or to borrow new money. For instance, if the Treasury offers long-term bonds, they compete with mortgage borrowers and with corporate borrowers for the available supply of long-term money.

Last spring, a fairly small offering of long-term bonds by the Treasury, sold at a time when corporate demand for long-term money was very heavy, and coupled with an announced policy by FRB to let normal forces of supply and demand take their course, demoralized the bond and mortgage markets. Interest rates went up sharply, a few proposed bond issues were abandoned or postponed, and home builders ran into trouble getting mortgage money on VA and FHA loans.

But since then FRB and Treasury have changed their approach. They have explained that they acted as they did last spring in order to check inflationary borrowing. Now that deflation is the major problem, FRB and the Treasury will work in the direction of keeping money easy, in order to prevent a recession.

A 2,240-mi pipeline is planned for Canada

As a result of the largest merger in Canada's financial history, the way is now clear for the construction across Canada of what will be the longest natural gas pipeline in the world.

It is expected that work on the line will start by mid-summer.

Earlier this month, Trade & Commerce Minister C. D. Howe announced in Ottawa the successful completion of talks between the two main companies which have been competing for rights to carry Alberta natural gas outside of that province. The two companies, Trans-Canada Pipelines Ltd., and Western Pipe Lines Ltd., have agreed to form what probably will be a $300-million corporation.

The line will be 2,240 mi long, starting from Princess, Alberta, and running through Regina, Winnipeg, Kenora, Port Arthur, and Sudbury. In Ontario Province, the line probably will branch. One branch will go south to Toronto and southern Ontario, where about half the people in Canada live. The other would stretch eastward across Quebec Province to reach Montreal, and possibly Three Rivers and Quebec as well. Prospects are that the line will reach Winnipeg in 1955, and get to Toronto and other eastern points by 1956.

Wenzlick is gloomy

He predicts big price drop in homes for 1954-1957, upturn in '58

Roy Wenzlick, the St. Louis real estate analyst, last week made a bearish prediction on future prices of existing homes. Wenzlick told the annual real estate forum sponsored by Cleveland's big savings bank, the Society for Savings, that prices of older homes might decline as much as 30% over the next four years, with less pronounced declines on new houses. However, he said prices of many of the small post-World War II houses might drop even more than 30%, as owners try to get rid of them to buy larger dwellings.

In common with many other economists, Wenzlick predicts a decline in formation of new families over the next few years, because the "hollow generation" born during the 1930s (when birth rates were low) will be the group providing most of the new marriages. That, he thinks, will have a depressing effect on real estate prices.

• **Good time coming**—He believes, however, that by about 1958 the real estate situation will change, as the first members of the post-1940 baby boom reach maturity and start forming families. That's why he is willing to predict that 10 years from now, existing new homes probably will be worth more than they are today.

For 1954, Wenzlick looks for little overall change in the price of new houses.

In some areas, the prices will go up, in others they will trend downward. Builders in some areas will shade profits in order to bring prices down. On older homes, he believes, prices will soften. Competition, along with increasing buyer caution, will force builders to do a better job of selling.

Studies made by Wenzlick's organization show building activity in the older, more mature areas like the east central section, is standing up better

than in areas where growth has been sudden, as on the West Coast. He is of the opinion that the reason is that the newer regions have overbuilt more than have established areas, so the downswing is more pronounced.

Here are Wenzlick's 1954 predictions for various building categories: factories, down 15%; offices, up 15%; stores, up 7%; farm building, down 10-15%; public housing, down 35%; schools, up 11%; public hospitals, down 20%; and private hospitals, down 4-5%.

Blaw-Knox buys Apsco

The plans of Blaw-Knox Co., Pittsburgh, to broaden its activities in the field of highway paving came to a head last week in the company's purchase of the All Purpose Spreader Co., Elyria, Ohio, which will be operated as a part of the Blaw-Knox Equipment Division.

Apsco manufactures a bituminous paver-finisher, and Blaw-Knox has previously sold only a bituminous paver, with the bulk of its other roadbuilding equipment concentrated in the concrete road field. Acquisition of Apsco places Blaw-Knox in the bituminous road equipment business in a much bigger way than formerly.

Only within recent weeks, Apsco has come out with a new rubber-mounted paver—finished with several other modern features (ENR Jan. 14, 1954).

Business briefs . . .

• **Westinghouse expansion**—Between now and 1955, Westinghouse Electric Corp. plans to spend $110 million on plant and equipment. The company expects its 1957 output capacity will be about 30% higher than it was in 1953.

• **Store construction**—A survey of 250 stores made by the National Retail Dry Goods Assn., shows that half of them plan major capital spending this year.

• **West Virginia Turnpike Commission** expects to sell up to $37 million in revenue bonds within the next 60 days. This would complete financing of the 88-mi turnpike being built between Princeton and Charles Town, scheduled to be opened this November.

• **New asphalt plant**—A $2-million asphalt plant will be built near Chicago at Hammond, Ind., by Byerlyte Corp., of Cleveland, and Allied Materials Corp., Oklahoma City.

Activity This Week

As reported to ENR (In millions of dollars)

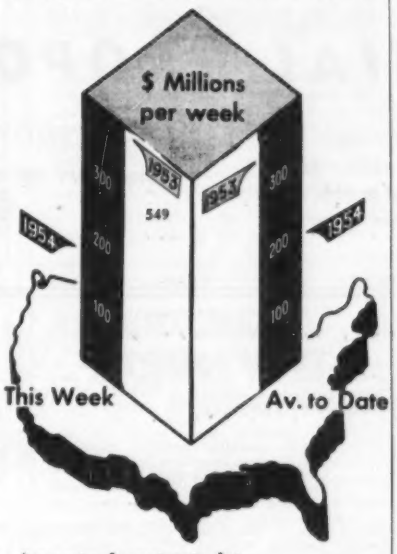

Amount of contracts let

	This Week	Cumulative 3 wks 1954	1953	% chge
Federal	$18.5	$52.0	$156.7	−67
State and municipal	51.9	271.5	299.7	−9
Total pub.	70.4	323.5	456.4	−29
Total priv.	103.2	271.8	601.1	−55
U. S. total	**$173.6**	**$595.3**	**$1,057.5**	**−44**
Contracts by type of work				
Waterworks	$2.8	$12.8	$13.2	−3
Sewerage	3.6	17.3	16.4	−27
Bridges	1.6	24.0	29.2	−18
Highways	9.3	90.9	95.3	−5
Earthwork, waterways	1.8	26.7	32.5	−18
Buildings: Public, excl. hsg.	30.0	112.9	141.6	−20
Housg., pub.	6.8	17.3	59.2	−71
Housg., priv.	50.6	141.0	149.7	−6
Commercial	11.2	50.5	35.3	+43
Industrial	38.7	71.7	275.3	−81
Unclassified	17.2	35.5	109.8	−68
Total	**$173.6**	**$595.3**	**$1,057.5**	**−44**

NOTE: Minimum size projects included are: Waterworks and waterway projects, $34,000; other public works, $60,000; industrial buildings, $82,000; other buildings, $300,000.

New capital for construction

(millions of dollars)	Week of Jan. 21 1954	Cumulative 2 Wks 1954	1953-54 % chge
Corporate securities	$25.5	$77.4	+1021
State and municipal:			
Excluding housing	42.4	58.8	−34
Housing	0.0	0.9	−61
Federal loans	0.6	3.7	−41
Federal aid	...	...	...
Total non-federal	**$68.5**	**$140.9**	**+34**
Federal approp.:			
In U. S.	...	...	...
Outside U. S.	...	...	...
Total new capital	**$68.5**	**$140.9**	**+34**

ENR indexes†		Base years = 100 1913	1926	1949
Constr.	Jan '54	614.04	295.17	128.72
cost	Dec '53	611.48	293.94	128.19
Bldg.	Jan '54	436.88	236.16	124.19
cost	Dec '53	435.90	235.63	123.91
Volume	Dec '53	547	222	158
	Nov '53	334	144	102

†Correction to ENR index tables page 70, Jan. 14, '53 issue and page 94, Jan. 7, '54—December '53 value of ENR construction cost index based on 1926 =100 is 293.94.

OFFICIAL PROPOSALS

(Continued on the following page)

Bids: February 9, 1954

Second Feeder for Navigation Aids at Runway 4-22

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT NYA-380.001

Sealed proposals for the furnishing and installation of a 5000 volt feeder and equipment for navigation aids at Runway 4-22 at New York International Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1111, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P.M., Tuesday, February 9, 1954, at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Engineer of Materials of the Authority, Room 1111, and copies will be furnished upon deposit of $50.00 per set. The deposit shall be delivered to the Treasury Department, Room 1001, where a receipt in duplicate will be issued. A copy of the receipt shall be delivered to the Engineer of Materials who will furnish the contract documents. The deposit will be remitted if the documents are returned in good condition, not later than forty days after the opening of proposals. The deposit will be forfeited if the documents are not so returned within the forty days.

THE PORT OF
NEW YORK AUTHORITY
Howard S. Cullman, Chairman

New York, January 21, 1954

Bids: February 10, 1954

Repairs to a Covered Timber Bridge

DEPARTMENT OF HIGHWAYS
ULSTER COUNTY, NEW YORK

Kingston, New York

Sealed proposals will be received by the Board of Supervisors of the County of Ulster, New York, at the office of Robert A. Snyder, Clerk, Court House, Kingston, New York, until 3:00 P. M. on the 10th day of February 1954, at which time and place they will be publicly opened and read, for the furnishing of all labor and materials necessary for the repairs to the framework of an old covered wooden bridge, known as Perrine's Bridge, designated as County Bridge #141, spanning the Wallkill River, in the Towns of Esopus and Rosendale, Ulster County, New York.

Plans and specifications may be seen in the office of the Clerk of the Board of Supervisors, Court House, Kingston, New York, and copies of same may be secured upon application to Roland H. Green, Acting County Superintendent of Highways, 74 John Street, Kingston, New York, upon the deposit of the sum of five dollars ($5.00), which sum will be refunded if the plans and specifications are returned in good condition within twenty (20) days of bids having been received and acted upon by the Board of Supervisors.

A certified check upon a National Bank, State Bank, or Trust Company in the sum of 10% of the amount of the bid, made payable to the Treasurer of Ulster County, New York, must accompany the bid as a guarantee that the contract will be entered into if awarded.

A labor and material bond will also be required.

A faithful performance bond in the sum of one hundred per cent (100%) of the contract price will be required.

The Board of Supervisors of Ulster County, New York, reserves the right to reject any or all bids as it may deem to be to the best interests of the County of Ulster, New York.

ROLAND H. GREEN
ACTING COUNTY
SUPERINTENDENT OF HIGHWAYS

Dated: January 12, 1954

OFFICIAL PROPOSALS

RATE: The rate for Official Proposal advertising is $1.50 per line or fraction set solid. Where the advertisement is set other than solid, the space is measured by total space occupied and charged on basis of 12 lines to the inch.

CLOSING DATE: Friday 10:30 A.M. for issue dated the following Thursday.

SEND COPY TO: Official Proposal Division, Engineering News-Record, 330 West 42nd Street, New York 36, N. Y.

(Continued from preceding page)

Bids: January 28, 1954

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of the Highway Law, sealed proposals will be received until ten-thirty o'clock A.M., eastern standard time on the 28th day of January 1954, by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following project in Onondaga County.

WILLIAM ROBINSON, DISTRICT ENGINEER, WEIGH LOCK BLDG., SYRACUSE 1, N. Y.

Contract No.	Type	Name of Highway and Miles	Deposit for Plans	Bid Deposit	Department Estimate
LOWSD. 54-1	Preliminary Grading, Gravel Surfacing	Lake Onondaga West Shore Development (State Fair Grounds Parking Area) 1.29 Miles	$15.00	$32,000	$393,000

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts and Accounts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement. Award of a contract is subject to priorities and allocations under the Defense Production Act of 1950, as amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders."

The right is reserved to reject any or all bids.

B. D. TALLAMY
SUPT. OF PUBLIC WORKS

Bids: February 23, 1954

Construction of Hangar No. 8

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
HANGAR NO. 8
CONTRACT NYA-370.003

Sealed proposals for the construction of Hangar No. 8 at New York International Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1111, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P.M., Tuesday, February 23, 1954, at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Engineer of Materials of the Authority, Room 1111, and copies will be furnished upon deposit of $50.00 per set. The deposit shall be delivered to the Treasury Department, Room 1001, where a receipt in duplicate will be issued. A copy of the receipt shall be delivered to the Engineer of Materials who will furnish the contract documents. The deposit will be remitted if the documents are returned in good condition, not later than forty days after the opening of proposals. The deposit will be forfeited if the documents are not so returned within the forty days.

THE PORT OF
NEW YORK AUTHORITY
Howard S. Cullman, Chairman

New York, January 21, 1954

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4101) will be received at Friant, California, until February 4, 1954, for furnishing labor and materials for earthwork and structures, Lateral 24.2 Extension, Lateral 24.2-17.0W, Lateral 32.2-9.9W Extension, and Lateral 32.2-13.2W, Unit No. 3, Madera Distribution System, Central Valley Project, California. Location: Near Madera, California. Principal items are: 306,000 cu. yds. excavation; 124,000 cu. yds. earth lining; 570 cu. yds. concrete in structures; 3,580 lin. ft. 12- to 60-inch concrete pipe; 16 Mbm. timber in structures; and other work. Completion time 120 days. For particulars, address Bureau of Reclamation, Friant, California; or Building 53, Denver Federal Center, Denver, Colorado.

W. A. DEXHEIMER, Commissioner

Bids: February 2, 1954

Serrating of Existing Grid Floors of Bridges

STATE OF NEW JERSEY
STATE HIGHWAY DEPARTMENT
TRENTON

NOTICE IS HEREBY GIVEN that sealed bids will be received by the State Department for:

Serrating the existing grid floors of the following seven (7) bridges. The total area to be serrated under the contract items is—26,628 square feet.

- Rt. 35—Cheesequake Creek Bridge at Morgan, Middlesex County
- Rt. 35—Manasquan River Bridge between Brielle & Point Pleasant, Monmouth & Ocean Counties
- Rt. 37—Mathis Bridge over Barnegat Bay, Ocean County
- Rt. 49—Maurice River Bridge at Millville, Cumberland County
- Rt. S49 (1927) Rt. 47 (1953)—Grassy Sound Bridge at Wildwood, Cape May County
- Rt. 56 (1927) Rt. U.S. 30 (1953)—Beach Thorofare Bridge on Absecon Boulevard, Atlantic County
- Rt. 7—Belleville Bridge over Passaic River, Essex, Bergen and Hudson Counties

Bids for the above will be received at the office of the State Highway Department, Assembly Room, Room 140, State Highway Office Building, 1035 Parkway Avenue, Trenton, N. J., on Tuesday, February 2, 1954, at eleven o'clock (11:00 A.M. —EASTERN STANDARD TIME), and will be opened and read immediately thereafter.

The receipt and opening of bids is subject to the proper qualification of the bidder in accordance with the provisions of the prequalification law and the regulations adopted by the State Highway Commissioner. Bidders must also submit a revised financial statement and statement of plant and equipment with their bid.

Drawings, specifications and form of bid, contract and bond for the proposed work are on file in the office of the State Highway Department, Trenton, N. J. and may be inspected by prospective bidders during office hours. Plans will be furnished on a deposit of Ten Dollars ($10.00) for each set of plans upon application to A. Lee Grover, Chief Clerk, State Highway Department, Room 139, State Highway Office Building, 1035 Parkway Ave., Trenton, N. J. Bids must be made upon the standard proposal forms in the manner designated in the standard State Highway specifications and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and work bid upon the outside, and must be accompanied by a certified check drawn to the order of the Treasurer of the State of New Jersey for not less than ten percent (10%) of the amount of the bid, provided that the said certified check shall not be less than $500.00 nor more than $20,000.00 and must be delivered at the above place on or before the hour named. Copies of the standard proposal forms and special addressed envelopes will be furnished on application. Bids not enclosed in sealed special addressed envelopes will be considered informal and will not be opened. The right is reserved to reject any or all bids.

Signed:
STATE HIGHWAY DEPARTMENT
A. Lee Grover, Chief Clerk

Bids: February 23, 1954

Paving and Utilities

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
HANGAR NO. 8
CONTRACT NYA-370.002

Sealed proposals for the construction of paving and the furnishing and installation of utilities for Hangar No. 8 at New York International Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1111, 111 Eighth Avenue, New York 11, N. Y., until 2:30 P.M., Tuesday, February 23, 1954, at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Engineer of Materials of the Authority, Room 1111, and copies will be furnished upon deposit of $25.00 per set. The deposit shall be delivered to the Treasury Department, Room 1001, where a receipt in duplicate will be issued. A copy of the receipt shall be delivered to the Engineer of Materials who will furnish the contract documents. The deposit will be remitted if the documents are returned in good condition, not later than forty days after the opening of proposals. The deposit will be forfeited if the documents are not so returned within the forty days.

THE PORT OF
NEW YORK AUTHORITY
Howard S. Cullman, Chairman

New York, January 21, 1954

Civil Engineer (Graduate)

with ability to translate technical Swedish to English and vice versa. General knowledge of heavy construction experience and tunneling desirable.

Submit complete resume, references, date of availability and salary requirements in first communication.

P-1429, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

SHOP SUPERINTENDENT

To take charge of structural steel fabricating plant employing less than 100 men in Middle Western city. Experience required in the fabrication of structural steel and plate work. Must also have handled labor negotiations. In reply state experience, former employers, age, education, personal references and salary expected. All replies will be held with strict confidence.

P-1370, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

REPLIES (Box No.): Address to office nearest you
NEW York: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
San Francisco: 68 Post St. (4)

POSITIONS VACANT

BUILDING ESTIMATOR and Quality Take-Off Man. Graduate Engineer preferred. Thoroughly experienced, permanent position with well established contractor with top-notch organization bidding competitively public works and commercial buildings throughout the South. Stanley W. Newman Company, Inc., P. O. Box 1646, Mobile, Alabama.

WANTED — CONSTRUCTION Superintendent. State age, experience, past 10 years. Salary and bonus basis after job. P-1259, Engineering News-Record.

ENGINEER ESTIMATOR to handle all phases of supervision, layout, etc. in Water Lines, Sewers, Tunnels structure and heavy Excavating. Must have wide experience with references for location in Ohio. Excellent salary, may have option to buy into corporation. State age and availability. P-1286, Engineering News-Record.

OPPORTUNITY—A well established construction firm in Northern New Jersey has opening for an experienced construction superintendent. Majority of work is in industrial construction. This is a real opportunity for a young man willing to accept greater responsibility. Permanent employment. Excellent salary and annual bonus assured. All replies will be held confidential. P-1319, Engineering News-Record.

WANTED: EXPERIENCED General Superintendent for Airport and Highway paving, grading, and drainage work. P-1317, Engineering News-Record.

ENGINEER—WANTED Mid-Western Cement Plant is looking for an engineer experienced in concrete construction to travel as field service engineer. For complete details, Write: P-1415, Engineering News-Record.

ROAD DESIGNERS Wanted. Experienced preferred. Permanent—38 hour week—Retirement plan. Reply stating experience, education, age. Wyoming Highway Department, Cheyenne, Wyoming.

STONE MASON working Foreman—Under 50. Rocko Cutstone Co., Pearl River, N. Y.

CIVIL, HIGHWAY, and Bridge Engineers, Designers, Draftsman, Surveyors and Corpsmen for permanent assignment on large Highway, Expressway and Bridge Program. Location Mid-Atlantic States. An opportunity with a progressive and expanding organization for producers of quality work. Submit resume; age, education, experience, title and duties, references, and salary required. P-1351, Engineering News-Record.

COMBUSTION ENGINEER wanted by a Glass Company in the Midwest. Must have a Technical background and familiarity with the burning of fuels in Industrial processes, especially natural gas, oil and other fuels including coal. P-1432, Engineering News-Record.

CIVIL ENGINEER—Well established company located in Southeastern part of the country has an opening for a graduate civil engineer who is capable of estimation bridges, docks, roads, airports and other heavy construction projects. Real opportunity for the right man. P-1431, Engineering News-Record.

WANTED

Mechanical Superintendent

Experienced in mechanical and process piping work relating to refineries, chemical plants, compressor plants, paper mills and manufacturing plants. Must have first hand knowledge of piping, rigging, millwrighting, welding and boilermaker work. Location West Coast, principally California. Submit experience record, references, availability, salary expected.

P-1379, Engineering News-Record
1111 Wilshire Blvd., Los Angeles 17, Calif.

EXPERIENCED STRUCTURAL ENGINEER

in New Orleans territory to represent large, nationally known steel fabricator. Prefer man with degree in civil engineering with practical experience in design, estimating and selling. Address replies to

P-1362, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

POSITIONS VACANT

STRUCTURAL ENGINEER and Detailer. Foreman Education and Degree desirable but not required. 4-years experience detailing absolutely essential. Shop and estimating experience helpful. Small shop in middle west doing light structural, miscellaneous & reinforcing. We are looking for top man who has reached a block in his present position and has capabilities of eventually assuming complete responsibilities. P-1434, Engineering News-Record.

MECHANIC, FAMILIAR with all types of heavy road equipment. Some ability to operate same. Work in central New York. P-1430, Engineering News-Record.

GRADE FOREMAN, familiar with rock, heavy excavation. Good opportunity. Work in central New York State. Experience references. P-1433, Engineering News-Record.

CARPENTER FOREMAN, familiar with all types of bridge work. Good opportunity with good concern. P-1435, Engineering News-Record.

SELLING OPPORTUNITIES OFFERED

SALES ENGINEERS — Pittsburgh, Pennsylvania with established national concern selling prefabricated metal products to engineering and construction markets. Position offered is permanent and presents excellent future with aggressive, progressive and expanding organization. Engineering degree desirable. Previous sales experience unnecessary. Age 24 to 30. Car furnished. Complete training program. Salary and bonus. SW-8254, Engineering News-Record.

SALESMEN, EXPERIENCED. For pump and wellpoint business. Established performance record. To go anywhere. Replies confidential. SW-1260, Engineering News-Record.

SALES ENGINEER—Pittsburgh, Pennsylvania and Albany, New York territories open with established national concern selling prefabricated metal products to engineering and construction markets. Positions offered are permanent and present excellent future with aggressive, progressive and expanding organization. Engineering degree desirable. Previous sales experience unnecessary. Ages 24 to 30. Car furnished. Complete training program. Salary and bonus. RW-1420, Engineering News-Record.

WANTED—SALESMAN, experienced in the sale of welded grating for sales and promotion work. Engineering background desirable. Excellent opportunity for the right man. SW-1334, Engineering News-Record.

(Continued on the following page)

DRAFTSMEN

Are you interested in permanent position in Eastern Virginia with progressive firm? New air-conditioned office, 40-hour week, overtime, hospitalization and group insurance plans, paid vacations. If you have had some experience in detailing or checking of Reinforcing Bars, Steel Joists, Windows, etc., reply giving brief and complete resume of experience, education and availability.

P-1126, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

WANTED

GENERAL MANAGER

Construction Equipment Distributor Nationally Advertised Allied Lines— No Crawler Tractors

Outstanding salesman with managerial abilities who can furnish proven record of sales and be willing to prove sales ability while training for this position. Age between 30-40. Must be dynamic driver, stable, temperate and earnest. Successful applicant will be given opportunity to purchase interest in business through earnings. In reply send photograph (if possible) and complete personal history statement and references. Confidence will not be violated. Do not apply unless you can fully meet these qualifications.

SOUTHERN GATEWAY CO.
2200 Losantiville Ave., Cincinnati 13, Ohio
Melrose 4282.

BRIDGE ENGINEERS

Recent Civil Graduate of accredited U.S. colleges. Should have not less than the following experience on bridges:

Detailers—2 years structural steel or reinforced concrete detailing.

Designers—5 years responsible work on structural steel and concrete including work on long span bridges.

Squad Leaders—3 years responsible charge of squad on structural steel detailing.

Please mail complete resume together with salary required to:

Howard, Needles, Tammen & Bergendoff
55 Liberty Street New York 5, N. Y.

WANTED

SEWAGE TREATMENT PLANT SUPERINTENDENT

For plant located in New England. Man to have responsibility of operating and maintaining a new sewage treatment plant and a system of interceptor sewers.

Must be experienced in operation and maintenance of large sewerage works and must be graduate engineer.

Reply by letter giving pertinent particulars to

P-1280, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

STRUCTURAL ENGINEERING
ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. ***Forty-third year. Write today.***
WILSON *Engineering Corp.*
College House Offices—HARVARD SQUARE, CAMBRIDGE, MASS.

(Continued from preceding page)

EMPLOYMENT SERVICE

SALARIED PERSONNEL, $3,000-$25,000. This confidential service, established 1929, is geared to needs of high grade men who seek a change of connection under conditions assuring, if employed, full protection to present position. Send name and address only for details. Personal consultation invited. Jira Thayer Jennings, Dept. I., 241 Orange St., New Haven, Conn.

POSITIONS WANTED

SANITARY ENGINEER. M.C.E., Cornell Univ. 12 years experience in experimental, research & development; design, construction, and operation of water, sewage, and industrial waste treatment facilities; conducting sanitary surveys; writing reports, contracts and specifications. PW-1150, Engineering News-Record.

ENGINEER B.C.E., M.S.C.E. 10 years field, office. Responsible Construction position New York or Long Island. PW-1254, Engineering News-Record.

CIVIL ENGINEER, graduate. Eleven years experience in construction supervision, cost estimating, planning, reconnaissance and location surveys, design, and coordination of roads, railroads, industrial buildings, power distribution stations, airfields, and small communities in the U.S.A., Europe, and Japan. PW-1253, Engineering News-Record.

NON-GRADUATE Construction engineer desires foreign employment where family is permitted. Europe preferred. South America acceptable. 3 yr. college equivalent, 14 yr. experience. Now employed as owner's representative on 8 million project at $8000. Resumes to all replies. PW-1151, Engineering News-Record.

ENGINEER, Reg. P.E. Reports, investigations. Settlement of contractors' claims, 45 years experience; design, construction. Turnpikes, tunnels, buildings, foundations, schools, etc. PW-1183, Engineering News-Record.

MATERIALS ENGINEER with 20+ years in steel, concrete, asphalt, soils, welding. Competent administrator. Seeks broader responsibilities in industry or consulting. Reply PW-1231, Engineering News-Record.

PROJECT MANAGER. Construction Supt.—28 years, experience Industrial buildings & Machinery and heavy foundations. Good manager, available immediately. Desire Southeastern States. Pw-1236, Engineering News-Record.

GENERAL SUPERINTENDENT and Project Supervisor, also Architect Engineer chief field Superintendent and Engineer, with many years in Chemical Manufacturing and various building construction also airfield and airbase construction in U.S.A. and over-seas. Available for immediate assignment, any location. PW-1324, Engineering News-Record.

PROJECT MGR. Construction Supt. Engineering education, 50 years of age, free to travel, 26 years experience in Industrial Building costs, would make excellent Contractor's assistant. Resume upon request. PW-1328, Engineering News-Record.

PARTY CHIEF—Highway, R.R. Experience. Construction, location, boundary, property surveys. Foreign, domestic. Warm climate. PW-1314, Engineering News-Record.

MECHANICAL ENGINEER desires foreign employemnt in Europe or Latin America. Age 35, married, one child. Previous Latin American experience. Spanish speaking. Over 15 years heavy experience in power, mining, construction, inspection. Presently employed by large Southwestern construction firm but available on short notice. Excellent references. Inquiries invited. PW-9747, Engineering News-Record.

LANDSCAPE ARCHITECT — civil engineer. Reg. Land Surveyor, age 36, 14 years diversified experience interested in good paying responsible position. Available on 30 days notice. U. S. or o'seas. PW-1351, Engineering News-Record.

REGISTERED HIGHWAY engineer and land surveyor. 30 years experience, 7 years construction superintendent highway and bridge construction. State side or offshore. PW-1397, Engineering News-Record.

CHIEF ESTIMATOR of large oil company desires change with advancement. Foreign assignment considered. Project manager preferred. Minimum $13,000. PW-1401, Engineering News-Record.

Engineers—Foremen—Office Men
Learn latest methods to organize and run work. Prepare for the top jobs.
Send post card for details.
GEO. E. DEATHERAGE & SON
CONSTRUCTION CONSULTANTS
411 So. 5th Ave. Lake Worth, Florida

POSITIONS WANTED

CONSTRUCTION ENGINEER, 38 married., BSCE, NSPE, reg. in Mo. Experienced in heavy and light construction from design and layout to field supervision. Desire employment with a Construction-Engineering Firm in Southeastern or Southwestern U. S. in supervisory capacity or employment leading to supervisory capacity. PW-1333, Engineering News-Record.

CONSTRUCTION ENGINEER—C.E. graduate with 25 years successful experience supervisory capacity both field and office. Sound knowledge all phases general construction and some industrial chemical. Seeking connection where top man required. PW-1307, Engineering News-Record.

CONSTRUCTION SUPERINTENDENT, concrete pipe manufacture. Considerable experience. PW-1298, Engineering News-Record.

ESTIMATOR AND Gen. Superintendent. 25 years experience in Field and Office on industrial commercial and public works. Age 47. Available at once, can assume complete responsibility from estimate to final completion of projects. PW-1400, Engineering News-Record.

CIVIL ENGINEER, 37, Reg. P.E., BME, 12 yrs. exp. all types municipal engineering and construction including administration, desires more challenging work. Presently in responsible administrative position. PW-1399, Engineering News-Record.

FIELD ACCOUNTANT—Travel World Wide. Complete office management duties. Frank Imperiale, Somerset Hotel, NY, NY.

STRUCTURAL ENGINEER, BCE, PE, 13 yrs. experience all phases building construction, design, estimating, detailing. Present position 7 years. Dependable, loyal, responsible. Desires position offering future, L.I. or N.Y.C. area. Willing to invest. Box PW-1383, Engineering News-Record.

STRUCTURAL ENGINEER—registered, graduate, 20 years experience desires position as Engineer for design, maintenance and construction with industrial organization in South or Southwest, will travel. PW-1384, Engineering News-Record.

CONSTRUCTION ENGINEER, Reg. Mature executive, experienced construction, estimating, specifications, design, maintenance, commercial, industrial buildings, housing. Contract management, sub-contracting. Some foreign experience, languages. Will go abroad. PW-1387, Engineering News-Record.

CHIEF ENGR. or Asst. Supt.—C.E. grad., Age 35, tired of moving about, wishes to become permanently associated with a well-established, heavy-construction organization whose activities are mainly within a 50 mi. radius of Central N. J. Widely varied experience includes large-scale dredging and dry excavation, bridge, highway, and pipeline construction, water supply, powerhouse construction, presently Chief Engineer on large oil refinery practices, estimates, progress reports, records, job planning. Adept at supervising and directing work of subordinates. Available in 60 days. Salary $10,000. Write for detailed resume. PW-1371, Engineering News-Record.

SANITARY-CIVIL Engineer, 43, registered Indiana, California. Excellent background sanitary, varied progressively responsible experience, fine technical writer, proven creative ability, successful sales and promotion. Desire relocation, available 30 days. PW-1365, Engineering News-Record.

INDUSTRIAL PROJECT Manager, 39, health excellent, M.E. graduate. 15 years diverse engineering experience. Analysis of projects, planning rehabilitation & expansion. 4 yrs. abroad. PW-1366, Engineering News-Record.

GENERAL SUPT. of Maintenance who can handle the big jobs. Available soon. PW-1364, Engineering News-Record.

POSITIONS WANTED

OFFICE PROJECT Engr. British/Canadian newly arrived in U. S. seeks position anywhere Eastern states. Age 30. Experienced in processing, organizing, purchasing, sub-letting, negotiating, and cost controls for all type and size bldgs. Highest references. PW-1354, Engineering News-Record.

CIVIL ENGINEER—MCE in Soil Mechanics and Foundation Engineering. 27, single. 4 years of varied experience in field exploration, design, and construction (2 years in responsible charge). Present salary approx. $7500. Will travel. Available in 2-3 months or sooner, if necessary. Foreign service preferred. Salary commensurate with responsibility. PW-1405, Engineering News-Record.

ESTIMATOR, HEAVY Construction. Excavation, foundations, concrete, piledriving, underpinning on heavy foundations, subways, tunnels, bridges and overpasses. Includes bidding, cost analysis, administration, sub-contract relations. Accustomed to responsibility. Long experience in Metropolitan area with contractors. One month availablity. Permanence important. Box PW-1308, Engineering News-Record.

CONSTRUCTION EXECUTIVE now employed in middle West, wants new connection in South or on West coast. Experience includes Field Supervision, Estimating and Bidding, Cost Controls, Sub-contract Administration, Owner-Architect relations Equipment Selection, Financial Management. Able to assume full responsibility in building contractor's organization. PW-1424, Engineering News- Record.

CIVIL ENGINEER Graduate, 26, family. Four years in field and office with large steel erector on bridges and buildings. Desires to relocate and work with smaller erector. Mid-west or east preferred. PW-1423, Engineering News-Record.

CIVIL ENGINEER Available. 14 years varied experience. Construction Field and office, Civil and Structural Design. California Registration. Prefers S.W. PW-1422, Engineering News-Record.

GENERAL SUPERINTENDENT available thoroughly experienced on Sewers, Subways, Bridges, and Plants, Location anywhere. Splendid references. PW-1406, Engineering News-Record.

CIVIL ENGINEERING employee desires position with engineering firm. Have had responsible engineering experience in various capacities in office and field on paving, sewers, waterworks and other municipal projects. Available. Locate anywhere. PW-1410, Engineering News-Record.

ENGINEERING ILLUSTRATOR, extensive training and experience in pictorial representation of proposed roads, machinery designs, architecture. Prefer South, South West location. PW-1348, Engineering News-Record.

CHIEF STRUCTURAL engineer 18 years domestic and foreign experience, at present in charge of Highway Bridge design department, young aggressive, efficient organizer, languages. Available for responsible position only. Goes West, overseas. PW-1363, Engineering News-Record.

BUSINESS OPPORTUNITY

Firm of consulting structural engineers interested in participation or purchase well established consulting engineering practice. BO-1296, Engineering News-Record.

GLAZER STEEL Corp.
Structural and Plate Steel Fabricators
Open capacity for quick delivery now available. We solicit your inquiries for Steel Fabrication and Warehouse Steel Products. Let us figure your jobs . . . Large or Small.
P. O. BOX 1390 KNOXVILLE, TENN.
Phone 4-8801

GIANTS UNDER THE EARTH
The Construction of the Brooklyn-Battery Tunnel
This is the story of the key men of the miraculous 20th century—those hardy human sandhogs who dug under water and blasted through earth and rock to build the slick, modern tunnels we use today for fast motor and railroad traffic.
Illustrated and photos. Per copy.....$1.00
Send check or money order to
PATRICK J. COSTELLO
152 E. 48th St. New York 17, N. Y.

DRAGLINES all with Diesel Engines

Available Immediately

Sale or Rent:

Manitowoc, Model 4500—6 yards
Northwest, Model 95—2½ yards
Bucyrus Erie, Model 54B—yards
Lima, Model 802—2 yards
Lima Paymaster, Model 34—¾ yard
Lorain, Model L-41—¾ yard

Dragline buckets furnished on the above

3—LeRoi Air Compressors, Model 600 C.F.M.; steel wheels; Murphy diesel engine.
5—Cletrac Tractors; equipped with Towers, Trigger Hoist; Drills and Swamp pads.
2—D8 Tractor Dozers
1—LeTourneau—12 Yard Pan
2—D4—Hydraulic Dozers
4 Sets Athey Tracks
Cat. 12 Grader with Welder; Lite Plant
Trucks and Jeeps

Priced to sell—Call or Write:

TESTA BROS., INC.
Clewiston *Tel.—2-5121 or 2-5101* **Florida**
OR
Room 925 Citizens Bldg., Cleveland 14, Ohio
Tower 1-0558

CONCRETE PLANT EQUIPMENT

2—1,200 barrel Johnson Cement Silos with bucket elevator, under track hopper and screw conveyor.

2—Johnson 150 cubic yard Concrete Plants, 3 aggregate and 1 cement compartment, 2 cubic yard aggregate and cement weight batchers, 520 barrel auxiliary cement bin with truck hopper, elevator and screw conveyor. One outfit has aggregate truck hopper and bucket elevator. Plants include 2 each of Ransome 28S Mixers.

50—1½ yard Blaw-Knox, R-46, Bottom Dump Concrete Buckets.

Subject to prior sale

FRAZIER-DAVIS CONSTRUCTION COMPANY
1319 Macklind Avenue, St. Louis, Mo. **STerling 1950**
Box 188—Grahamsville, New York **Grahamsville 2861**

FOR SALE
UNIVERSAL TRUCK CRANE
Mounted on 10 Ton White Chassis

25'—37'—52' Boom. Spare Waukesha Crane engine included. Good operating condition.

We offer subject to prior sale $7,500.00 cash.

Consolidated Engineering Company
P. O. Box 409 **Wheeling, West Va.**
Telephone 638 Wheeling

SURPLUS EQUIPMENT
FOR SALE OR RENT
With Option to Purchase
Rebuilt—A1 Condition

1 48B Bucyrus Erie Shovel 2 cy diesel
1 Model 6 N.W. Shovel 1½ cy diesel
1 Caterpillar D8 Bulldozer
1 New Shovel Front for Model 6 N.W.
1 Used Shovel Front for Model 25 N.W.

WILLIAMS CONSTRUCTION COMPANY
Box 145 Balto, 20, Md. Phone—Murdock 6-6600

FOR QUICK, DEPENDABLE
COMPRESSOR
SERVICE

AMERICAN AIR of JERSEY

GAS • DIESEL • STEAM • ELECTRIC

SELL—BUY—TRADE—RENT—REPAIR

A RENTAL COMPRESSOR FOR EVERY JOB

55 CFM Lindsay (GAS) Portable
60 CFM Worthington (GAS) Portable
70 CFM Smith (GAS) Portable
89 CFM 6 x 7 Worthington HB, 15 HP Elec
105 CFM Worth-IR-CPT Portable
107 CFM 7-7 x 7 Ingersoll FS-1 STEAM
129 CFM 7½ x 7 American AF-1, 20 HP
142 CFM Ingersoll Semi-Portable 25 HP
160 CFM IR-Worth Portable
165 CFM Smith 110SR Semi-Portable, 25 HP
195 CFM 8-9 x 9 Worthington HS STEAM
210 CFM Worthington (GAS or DIESEL) Port
211 CFM 9 x 9 Worthington HB, 40 HP Elec
279 CFM 11-10 x 11 Worthington HS STEAM
294 CFM 10 x 12 Worthington HB, 50 HP
315 CFM Worthington (GAS or DIESEL) Port
387 CFM Gardner Semi-Portable 75 HP
445 CFM Gardner Semi-Portable 100 HP
462 CFM 12-14½ x 13 American AF-S STEAM
500 CFM Worthington (DIESEL) Portable
538 CFM Worthington Semi-Portable, 100 HP
600 CFM Worthington (DIESEL) Portable
628 CFM 14 x 13 Ingersoll ES-1, 100 HP

MANY OTHERS TO CHOOSE FROM
GUARANTEED PERFORMANCE
COMPRESSORS SINCE 1902

American
AIR COMPRESSOR CORP.
DELL AVE. & 48th ST., NORTH BERGEN, N. J.
Telephone UNion 5-4848

FOR SALE
SIX—500 CU. FT.
INGERSOL-RAND DIESEL DRIVEN
AIR COMPRESSORS
Mounted on Pneumatic Tires—Good Condition
CONTRACTORS TRADING & EQUIPMENT CORP.
232 FULTON ST - N.Y. 7, N.Y. BArclay 7-3940

SALE or RENT

3—Northwest ¾ yd. #25 Pull shovels or cranes (1952 Murphy G.M. Diesels)
1—Northwest 1¼ yd. 104—52" Pull shovel Gas
1—Lorain 40 ¾ yd. Pull shovel or crane Gas
1—H. M. Hough Payloader 1½ yd. 1952
1—D-6 Caterpillar Dozer
1—Pippin—Ford Pull shovel
4—Dump Trucks and Pick-up
2—Ingersoll-Rand Compressors 160 and 310
20—Diaphragm pumps
1—LaPlant—Choat 5 yd. Hydraulic scraper

UNITED FOUNDATION CORPORATION
680 Lexington Rd. **Union, N. J.**
Phone: Unionville 2-4257

FOR SALE
1949 Ford F-8 Tractor Truck

Complete with Air Brakes, Air Horns, Radio, Heater, 100 x 20 Tires and Dorsey built 16 ft. Bed Lowboy Trailer With Eight 820 x 15, 12 ply tires. Excellent condition. Will be glad to furnish prices and Photos.

SOUTHEASTERN ELECTRIC CONSTRUCTION CO., INC.
P.O. DRAWER 351 **ANDALUSIA, ALABAMA**

B-Monighan Walking draglines, 3 to 12 yds. (6)
Whirley portal gantry cranes, 35-50 tons (3).
Locomotives, diesel, gas, 7 to 80 tons (9).
Cat DW-10 wagons (3), 1946, bottom dump.
Euclid 25-ton bottom dumps, diesel (5).
Telsmith 26" steel gyratory crusher, 25A.
Marine diesel engines, 320, 950, 1600 HP.
Cranes, draglines, shovels, 1½ to 18 yds.
Bucyrus 2-1/3 yd. shovel front att., 32B-55B.

H. Y. SMITH CO.
828 N. Broadway Milwaukee 2, Wis.

LOW COST INSTALLATION AND OPERATION

CABLEWAYS
IMMEDIATE SHIPMENT
ELECTRIC, STEAM or DIESEL
CAPACITY 3 TO 20 TONS
SELL, RENT or BUY

FOR DAMS, BRIDGES, BREAKWATERS, FILTRATION AND SEWERAGE PLANTS

FOR SPEED, ECONOMY, EFFICIENCY, FLOOD SAFETY, LABOR REDUCTION

AMBURSEN DAM CO. INC.
295 MADISON AVE. NEW YORK

FOR SALE
STEEL BIN, Covered

Approximately 25' diameter, 32' high. On highway and railroad near Birmingham. Address inquiries

P. H. HASKELL, JR.
P. O. Box 2002 **Birmingham, Alabama**

1 Practically new model 845 Barber-Greene black top plant

including

Model 845 Mixer,
Model 811-A Fines Feeder,
Model 865 gradation unit,
Model 835 dryer,
Model 852 dust collector,
Model 815 4-aggregate cold bin.

Price reasonable. Plant practically new; mixed 32,000 tons only. This can be purchased with or without a new or used Barber-Greene finishing machine. For complete detailed information write or telephone:

Allied Construction Equipment Co.
4015 Forest Park Ave., St. Louis 8, Missouri
***Telephone:* Franklin 1818 or 7132**

FOR SALE

MANITOWOC DRAGLINES Model 4500

FOR SALE or RENT

Manitowoc Model 3500 Liftcrane. Clamshell, Dragline combinations. 2½ cu. yds., 60 ton capacity.

Reply to

Clemens Construction Co.
P. O. Box No. 266, West New York, N. J.

FOR SALE
FOUR USED DRAWING TABLES

Hamilton No. 250, good condition
Adjustable tilt top. $35.00 each.

ECONOMY NURSERY CO.
LITTLE SILVER, N. J.
Tel. Red Bank 6-2030

STOCK SPECIALS

For Sale or Rent

1—P & H Model 855 Crawler Shovel, 2 yd. capacity. Cat. Diesel power. Reconditioned. Crane available.

1—P & H Model 655B Crawler Crane, 1½ yd. capacity. Late model. Cat. Diesel.

1—P & H Model 700 Crawler mounted Crane, 1½ yd. capacity. Gas power. Good all-around condition.

1—Osgood, 1 yd. Crawler Hoe & Crane, 50' boom. Gas Power. Good Condition.

1—Koehring Model 301 ¾ yd. Crawler Crane, 30' boom. Serial #1277. Very good used condition.

1—Bay City Model 45 ¾ yd. Crawler Hoe-Shovel-Crane. Late model in perfect condition. Cat. D318 or Gas.

1—Northwest Model 25 Crawler Crane, Hoe or Shovel, ¾ yd. Gas Power. Good Condition.

1—Buckeye Model 70, ¾ yd. Crawler Hoe or Crane, available as Gas or Diesel. Excellent.

1—Link Belt Speeder Model D-4 Crawler Crane, 35 ft. boom, 16" crawler shoes, Cat. D-7700 engine. Reconditioned.

1—Bay City Model 30, Heavy Duty ½ yd. Crawler Shovel or Hoe. Gas Power. Reconditioned. Late Model.

1—Bay City Model 25, ½ yd. Crawler Shovel or Hoe. Late Model. Rebuilt.

1—Michigan Model C-16, ½ yd. Crawler Hoe. Gas power. Excellent condition.

1—Insley Model K-12 Crawler Shovel or Hoe, ½ yd. capacity. Gas Power. Excellent Shape.

1—Byers Model 61, ½ yd. Crawler Hoe or Crane. Gas Power. Good condition.

1—Bay City Model 20, ⅜ Yd. Crawler Shovel or Hoe. Completely Rebuilt. Gas Power.

1—Universal Truck Crane, 28 ft. boom, mounted on A. C. Mack Chassis. Single axle rear.

1—Bay City Model 65 or 650 Shovel & Hoe Attachments with 1¼ yd. shovel dipper. Practically new.

1—P & H 255A Hose Attachment. Practically new.

Clamshell Buckets, ⅜ to 2 cu. yd., also several Crane Booms—Trench Hoes and Shovel Attachment—Assorted makes.

EUGENE P. READING, INC.
Walnut St. & B. & O. R.R.
Roselle, New Jersey
Chestnut 5-0200—New Jersey

PILING

SURPLUS NEW and USED For Sale or Rent

STEEL SHEET PILING

Available from stock. Will also roll to size and specifications.

LARSSEN Arch Web



High section modulus • Very great durability • Great longitudinal strength • High rigidity • Uniform interlock

UNION Straight Web

For cellular construction
High interlocking strength

Let us design your sheet piling structure ECONOMICALLY.

KURT ORBAN CO., INC.
205 East 42nd St., N. Y. 17, N. Y.
Phone: MU 4-7700

FOR SALE

STEEL SHEET PILING

AT CHIEF JOSEPH, WASHINGTON
Shipped New—Used Only One Job

CARNEGIE Length	MP-101 Pcs.	MP-102 Pcs.	TEES Pcs.
72-65 ft.	105	100	2
65-60 ft.	210	50	9
60-50 ft.	210	5	18
50-45 ft.	290	2	7
45-40 ft.	120	1	13

Also quantity shorter than 40 ft.—Quick shipment regardless of job location, write, wire or phone.

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., CHestnut 4474, St. Louis 1, Mo.

STEEL SHEET PILING

900 TONS ALGOMA B6—30 FT. CANADA
300 PCS. U.S. MP-101—Y-PCS. 56 FT. IN ILL.
498 PCS. U.S. MP-101—56 FT. IN ILL.
244 PCS. BETH. DP-2—25 FT. IN N. Y.
382 PCS. BETH. AP-3—20/25 FT. IN PA.
128 PCS. BETH. DP-2—60 FT. IN OHIO
188 PCS. BETH. DP-2—40 FT. IN N. J.
350 PCS. BETH. DP-2—50 FT. IN N. Y.
400 PCS. BETH. ZP-32—58 FT. IN FLA.

FOUNDATION EQUIPMENT

E-4 McK. TERRY EXTRACTOR
15 McK. T. HAMMERS 11B3—10B3—S8—S5 & No. 5
Vulcan No. 0-1 & 2 Pile Hammers
9½ x 10 LAMBERT 3 DRUM STEAM HOIST

R. C. STANHOPE, INC.
60 E. 42nd St. N. Y. 17, N. Y.

We do a Nation-Wide business in

STEEL SHEET PILING

IMMEDIATE SHIPMENT

1000 pcs. 72-16 ft. Carn. MP-101-West Coast
164 pcs. 60-50 ft. M-116 & M-115-Illinois
95 pcs. 60-30 ft. Beth. DP-2-New York
139 pcs. 30 ft. Inland I-23-Kentucky
112 pcs. 40 ft. Larson 11-Alabama

Other lengths & sections used & new at other locations in United States for rent.
We have Nation-wide reputation for effecting QUICKEST SHIPMENTS.
All sizes Vulcan & McKiernan Pile Hammers & Extractors for rent—Shop Rebuilt
Regardless of location of job. Wire, Write, or Phone

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., Chestnut 4474 St. Louis, Mo.

STEEL SHEET PILING

260-Pcs. 39-40 Ft. M-115 So. Dokato
350-Pcs. 35-39 Ft. M-112 Kansas City
100-Pcs. 30-35 Ft. I-27 Kansas City
107-Pcs. 24-65 Ft. M-112 North Dakota
200-Pcs. 27-30 Ft. M-116 Kansas
100-Pcs. 24-25 Ft. M-115 Kansas
100-Pcs. 17-20 Ft. M-112 Kansas City

Available for prompt shipment
Other lots at various locations

CONTRACTORS MACHINERY COMPANY
Phone Valentine 4740
2637 SW Blvd Kansas City 8, Mo.

FOR SALE

48B BUCYRUS ERIE SHOVEL 2½ YDS.
Completely Overhauled
$24,000.
J. C. McDONALD
Box 143, Murdock 6-6600, Baltimore 20, Md.

PUMPCRETES
Rebuilt Current Models
For Sale or Rent
CONCRETE EQUIPMENT COMPANY
Jones Island, Station D
Milwaukee 7, Wis.

4500 Manitowoc Shovel-Dragline Combination
Diesel Power, 1952 Model
Good Condition—Reasonably Priced
Western Location
FS-1220, Engineering-News-Record
520 N. Michigan Ave., Chicago 11, Ill.

STEEL SHEET PILING

FOR SALE OR RENT

STEEL SHEET PILING

BRAND NEW

1336 pcs. 56 ft.-Carnegie MP-101
100 welded Y's 56 ft.

About mill price in carload lots.

IMMEDIATE SHIPMENT FROM CHICAGO

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., Chestnut 4474, St. Louis, Mo.

When you need PILING . . . fast

use this section, as many contractors do, as a piling buying directory. It can save you time when you want to know, quickly, where to buy good new or used piling.

—FOR SALE—

2—Lorain Model TL-20 (1950)
½ cu. yd.

DRAG SHOVELS

Powered by Caterpillar Mdl. D-315 diesel engine. Good operating condition. S-461 & 462 (C).

$5500.00 Each

Write P.O. Box 27
Evansville, Ind.
'Phone 3-4491, Mr. Judd

LOUISVILLE MIDDLESBORO — BRANDEIS — EVANSVILLE PADUCAH
BRANDEIS MACHINERY & SUPPLY COMPANY
INCORPORATED
LOUISVILLE Since 1908 KENTUCKY

FOR SALE

Steam Whirley Crane

Mfg. by McMyler
Ser. No. 3115

Delivery to any inland Atlantic port by barge.

Capacity: 20 Ton—80' Radius
Boiler New—1949
Designed Pressure 150 P.S.I.
Diameter 60"
Length 8' 6"
Lighting Generator—Moon 3K
Revolving 180°

For complete information, write or call

HUGHES BROS., Inc.

17 Battery Place, New York 4, N. Y.
Tel: Whitehall 4-1048
Clearing House for Marine Difficulties

ATTENTION CONTRACTORS

Here is a bargain in equipment for immediate delivery.

2—New International Harvester Model LF-210 6 Wheel Trucks with auxiliary transmissions.
1—New Bucyrus Erie 8-9I Scrapper.
1—New Bucyrus Erie Model CR-3 Ripper.
2—New P-25 double drum tractor winches.
1—Used International Harvester T-6 Tractor equipped with Hydraulic Dozer Shovel.

Contact

ICHABOD T. WILLIAMS & SONS
220 Eleventh Avenue
New York City, 1, N. Y.

FOR SALE

Located in our Yard, Cleveland, Ohio, in excellent condition subject to prior sale:

6—25 YD. R. U. LeTOURNEAU SCRAPERS, overhauled, tires good, Serials S9062, S9519, S9643, S9656, S8991, S8992, $4500.00 each.

1—MODEL 9 BV EUCLID LOADER, Serial 9 BV-121, powered with GMC Diesel 671 RA 63-6A-9046, completely overhauled and good as new. Has new belt never used. Price $18,000.00.

1—6 TON BROOKVILLE DIESEL LOCOMOTIVE 36" gauge, International UD9 Engine 5 speed transmission, 20" rolled steel wheels, mechanical brakes, gas starting engine, electric lights, enclosed cab, used 3 months, price $1500.00.

Call Mr. Fuller Grund, Broadway 1-7860

THE HUNKIN-CONKEY CONSTRUCTION COMPANY
3459 E. 52nd Place — Cleveland, Ohio

FOR SALE

Steel Stiffleg Derrick

90' Boom
3 Ton Capacity at 75' Radius
May be Inspected in Operation
For Quotation Apply To
FS-1412, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

RAILS-TIES

TRACK ACCESSORIES
NEW and RELAYING

PUMPCRETE REX 200 DOUBLE

LIKE NEW

Powered by 6 cyl. Waukesha engine, selected drive transmission, overhead platform & controls, pug-mill remixer, auxiliary equipment & $600.00 in SPARE PARTS and following 8" PIPE.
60 pcs. 10', 6 pcs. 5', 2 pcs. 3', 3 pcs. 2', 2 pcs. 1', 2—22½° Els, 6—45° Els, 2—11¼° Els.

MACHINE IN EXCELLENT CONDITION WILL STAND RIGID INSPECTION $15,800 F.O.B. SO. WISCONSIN

G. A. COONEY
2128 Hudson — Chicago 14, Ill.
Financial 6-0456

"SEARCHLIGHT"

IS

Opportunity Advertising

—to help you get what you want.

—to help you sell what you no longer need.

Take Advantage Of It

For Every Business Want

"THINK SEARCHLIGHT FIRST"

NEW—RAILS—Relayers

All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK
480 Lexington Ave., New York, N. Y. — Park Bldg., Pittsburgh, Pa.
Reno, Nevada — Carnegie, Pa.

RAILROAD Cross and Switch TIES

Promptly from adequate stocks
NEW and USED *(as available)*

GILLIS & COMPANY
29 East Madison St. — Chicago 2

FOR SALE

LIMA 1201 Diesel Comb. Stand. 3½ c.y. Shovel, Crane-Dragline with 100 ft. boom, 18'-11" Extended Cats, 44" Treads, with extra complete Highlift 2½ c.y. Shovel Front and Light Plant. S/N 5313. Located Littleton, N. H.

Excellent condition—completely overhauled Spring 1953.

COAL CRUSHERS—NEW
McLanahan & Stone 24" x 36"
Single Roll
McNally Pittsburg 24" x 36"
Double Roll

Located Framingham, Mass.

B. PERINI & SONS, INC.
FRAMINGHAM, MASS. — Tel. 7445

RAILS
NEW — RELAYING — TRACK ACCESSORIES
MIDWEST STEEL CORP.
502 DRYDEN STREET
CHARLESTON, W. VA.
IMMEDIATE DELIVERY

FOR SALE

REAL VALUES IN USED EQUIPMENT

Lorain Model 80 Shovel—1¾ yard with Cat. D-13000 diesel engine. Excellent.
Barber Greene Model 879A finisher—Used slightly & in new condition.
Buffalo Springfield 8-12 ton diesel tandem roller—Excellent.
Galion 8-10 ton diesel tandem roller.
Lorain MC 414 twenty ton truck crane.
Link Belt HC 70 twenty ton truck crane.
Madsen 4000# portable asphalt plant.
Barber Greene 848 asphalt plant, complete.
Cedar Rapids 3000E asphalt plant.
2—49FD Euclid rear dump trucks, perfect.
5000'—9" x 9" Road Forms.
4000'—10" x 10" Road Forms.
4200'—8" x 8" Road Forms.
150 bbl. Blaw Knox bulk cement bin.
254 bbl. Johnson cement silo.
182 ton Blaw-Knox 3 compartment aggregate bin with batcher.

We have, at all times, many exceptional buys in rock and dirt moving, crushing, asphalt & concrete paving equipment. We solicit your inquiries.

WRITE—WIRE—CALL

AL J. GOODMAN

Dealer in Used Contractor's Equipment
P. O. Box 263
Office 36456 Nite 5668
ASHEVILLE, N. C.

FOR SALE

New and Used material—Immediate delivery from stock Angles, Channels, I and WF Beams, especially for Contractors needs

H BEAMS PILE SECTIONS

60 pcs 12" B P S 53# 60'
16 " 12" B P S 74# 75'
16 " 10" B P S 57# 67' 6"
34 " 10" B P S 42# 48'
23 " 10" B P S 42# 60'

Phone or Wire your steel requirements

We are also interested in purchasing your surplus material.
We assure you our prices will be the best obtainable.

HY DRACHMAN STEEL CORP.

Warehouse
14-23 34th Avenue, Astoria, New York
AStoria 8-4484 8-8023

Sales Office
563 East Tremont Ave., New York City, N. Y.
CYpress 9-5440

DEPENDABLE USED MACHINES

Special:—Lorain ½ yd. dragline, 22" shoes, 30' boom, rebuilt in our shop. Come see it!

Bay City 1¼ yd. dragline
Lorain ⅝ yd. dragline
Universal ½ yd. hoe
Byers ½ yd. shovel
Butler Carscoop
Morris 10" manganese gravel pump
Diamond 9x18 roller bearing crusher
Cedar Rapids 16x16 roll crusher
45 ton, 3-comp., port. steel bin
Chrysler 8 cyl. power unit
3 yd. Dumpcrete
4x8 screen
International U-21
Butler fork truck
⅝ yd. drag bucket

FOR RENT.—cranes, draglines, backhoes, buckets, and all other accessories.

10002 Southwest Highway TRACTOR & EQUIPMENT CO. Oak Lawn, Ill.

FOR SALE at great saving!

Two PRE-2 Air Compressors (I-R)

Both in excellent condition. Five Step Unloader. Manual Reduced Voltage Panels. Belt Driven Exciters. Located on West Coast. May be inspected under power.

SURPLUS CLEARING HOUSE 1430 Franklin Ave., St. Louis 6, Mo.
Write, wire or telephone (Chestnut 4836)

PIPE

SURPLUS NEW and USED FOR SALE

WANTED

Pipe Sizes ⅛" to 72" OD

PIPE, VALVES & FITTINGS
pipe piling • culverts • valves
specialists in prefabricating pipe

ALBERT PIPE SUPPLY CO., INC.

CUTTING-THREADING-FLANGING-WELDING
BEVELING-BENDING-COILING-LINING
TO ALL STANDARD SPECIFICATIONS

"one call gets them all"

fittings • FLANGES • WELDING • IRON-STEEL

SPEEDLAY pipe systems
Berry at North 13 Sts., B'klyn, N. Y.

WANTED

USED, GOOD CONDITION

2-Traveling Bridge Cranes

Box girder type—electric powered 440 volt, 3 phase, 60 cycle. For inside service structural fabricating plant. Span 80'; main hoist 25 ton; auxiliary hoist (1) 5 ton; minimum lift 40'; travel speeds (approximate) bridge 400 FPM; trolley 150 FPM; lift speed (approximate) main hoist 35 FPM auxiliary 70 FPM. Submit full particulars.

W-1175, Engineering News-Record
330 W. 42 St. New York 36, N. Y.

FOR SALE—*Immediate Delivery*

C.I. Water Pipe and Fittings—AWWA Standard

We specialize in pipe and fittings which are hard to get, having in stock such as the following:—

2000 linear feet 30" Class B—Pit Cast—Class B in 12 ft. lengths—Re-conditioned

5 Lengths 60" B&S Pipe, Cl. D. 12' long
3—60" x 24" Solid Sleeves, Cl. D.
1—60" B&S 45 deg. Bend, Cl. D.
20" to 36" B&S 45 deg. Bends
3" to 30" Y-Branches—Type 2

Also C. I. B&S Pipe from 2" to 36". C. I. Flanged Pipe from 3" to 24". Always on hand a complete line of C. I. Fittings—all sizes and kinds.

TAGCO, INC.
111 Front St. Hempstead, L. I., N. Y.
Tel.—Hempstead 2-5535 or 2-8857

PIPE

15,000 feet 6" steel pipe
10,000 feet 4" steel pipe

Both equipped with roller grip couplings suitable for air or water.

Subject to prior sale

FRAZIER-DAVIS CONSTRUCTION CO.
1319 Macklind Avenue, St. Louis, Mo.
STerling 1950

Box 188 Grahamsville, New York
Grahamsville 2861

WANTED

2½ to 3 yard shovel high lift drag. Exchange for good equipment, fair basis. Have 2—300 H. P. atlas Imperial Diesel generators and all controls 2300 V.

1—500 K.W. Westinghouse 1200 R.P.M. M.G. Set 2300-250
2—150 G.E. Sets and controls all A1 condition
1—8 ft. drum hoist and electric motors
2—24 inch 2 drum hoist 80 H.P. electric motor 80 H. P.

A. M. PARK Lincoln, Illinois

EST. 1904

DAVIDSON

PIPE COMPANY INC.

ONE OF THE LARGEST STOCKS IN THE EAST

Seamless and Welded ⅛" to 26" O.D.
All wall thickness Manufactured.
Specialty large sizes.
Cutting — Threading — Flanging — Fittings — Valves.

Call GEdney 9-6300

50th St. & 2nd Ave., B'klyn 32, N. Y.

GLOBE PIPE & FITTING CO.

VALVES FITTINGS NEW **PIPE** USED FOR ALL PURPOSES

785 Metropolitan Ave., Brooklyn 11, N. Y.
EVergreen 7-6220

When you need

PIPE . . . fast

use this section, as many contractors do, as a pipe buying directory. It can save you time when you want to know, quickly, where to buy good new or used pipe.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on following pages

NEW ENGLAND

Fay, Spofford & Thorndike

Engineers

Charles M Spofford — Ralph W. Horne
John Ayer — William L. Hyland
Bion A. Bowman — Frank L. Lincoln
Carroll A. Farwell — Howard J. Williams

Members, American Society of Civil Engineers

Airports, Bridges, Turnpikes
Water Supply, Sewerage and Drainage
Port and Terminal Works
Industrial Buildings

Designs — Investigations
Supervision of Construction
BOSTON — NEW YORK

Jackson & Moreland

Engineers and Consultants

Utilities and Industrials

Design and Supervision of Construction
Reports—Examinations—Appraisals
Machine Design—Technical Publications

Boston — New York

Chas. T. Main, Inc.

Engineers

Design and Supervision of Construction for Industrial Plants
Electrical, Steam and Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
80 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS

Investigations — Reports — Design
Supervision of Construction and Operation
Management — Valuation — Laboratory

1300 Statler Building, Boston 16

C. W. Riva Co.

Engineers — Edgar P. Snow

Highways, Bridges, Tunnels, Airports, Foundations, Sewerage, Water Supply, Reports, Design and Supervision.

511 Westminster St. — Prov. 3, R. I.

MIDDLE ATLANTIC

Greer & McClelland

Consulting Foundation Engineers

SOIL INVESTIGATIONS

Borings
Laboratory Tests
Foundation Designs & Analyses
Reports

98 Greenwood Ave. — Montclair, N. J.
2649 N. Main St. — Houston, Texas

Edwards, Kelcey & Beck

Reports, Design Supervision, Expressways, Port & Harbor Works, Terminals, Tunnels, Bridges, Water Supply, Industrial Plants, Traffic and Management Studies.

2 William Street — 250 Park Avenue
Newark 2, N. J. — New York 17, N. Y.

Porter, Urquhart & Beavin

O. J. Porter & Co.
Consulting Engineers
Airports-Highways-Dams-Structures
Foundations-Stabilization-Pavements
415 Frelinghuysen Ave., Newark 5, N.J.
76 Ninth Ave., New York 11, N. Y.
3568 West Third St., Los Angeles 5, Calif.
516 Ninth St., Sacramento 14, Calif.

W. W. Slocum & Co.

ENGINEERS

Industrial - Design - Management
National Newark Building
744 Broad St., Newark 2, N. J.

Boswell Engineering Company

Engineers — Surveyors

Topographic, Highway and Property Surveys, Tax Maps, Design, Supervision, Highways, Industrial Buildings, Sewers, Garbage Disposal Municipal Improvements, Airports
Ridgefield Park, New Jersey
Phone Diamond 2-6343

Frank E. Harley and Associates

Consulting Engineers

Design, Surveys, Plans and Construction Highways, Sewerage and Sewage Treatment, Water Supply and Purification, Municipal Problems.
Harley Bldg., 260 Godwin, Wyckoff, N. J.

B. K. Hough,

Consulting Engineer
Soils & Foundation Engineering

Site investigations, field and laboratory testing, design analysis for earthworks, foundations and pavements, inspection & control earthworks construction, engineering reports, consultation.
121 E. Seneca St., Ithaca, New York

Ammann & Whitney

Consulting Engineers

Design — Construction Supervision
Bridges, Buildings, Industrial Plants, Special Structures, Foundations, Airport Facilities, Expressways.

76 Ninth Avenue, New York 11, N. Y.
724 E Mason Street, Milwaukee 2, Wis.

Barker & Wheeler

Water Supply — Utility and Industrial
Sewerage — Valuations
Sewage Disposal — Reports
Power Systems

New York City, 11 Park Place
Albany, N. Y. 36 State St.

Clinton L. Bogert Assoc.

Consulting Engineers

Clinton L. Bogert — Ivan L. Bogert
Robert A. Lincoln — Donald M. Ditmars
Water and Sewage Works
Refuse Disposal — Industrial Wastes
Drainage — Flood Control

624 Madison Ave., New York 22, N. Y.

Bowe, Albertson & Associates

Engineers

Water and Sewage Works—Industrial Wastes—Refuse Disposal—Municipal Projects—Airfields—Industrial Buildings—Reports—Designs—Estimates—Valuations—Laboratory Service.

116 William St., New York 7, N. Y.

Brown & Blauvelt

CONSULTING ENGINEERS

Industrial Plants
Bridges, Dams, Airports
Expressways, Parkways, Highways

Preliminary Reports
Engineering Design
Construction Supervision
Material Controls & Testing

Municipal Engineering Services
Tax Maps, Surveying

468 Fourth Ave., New York 16, N. Y.
140 Eighth Street, Pittsburgh, Pa.

Buck, Seifert & Jost

Consulting Engineers
(Formerly Nicholas S. Hill Associates)

Water Supply — Sewage — Hydraulic Developments, Reports and Valuations, Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

Cotton, Pierce, Streander, Inc.

Associated Engineering Consultants

Water Supply, Treatment, Distribution
Sewage, Sewage Treatment
Refuse Disposal, Trade Wastes
Power Plants
Reports, Plans, Supervision

132 Nassau St., New York, N. Y.
PO Box 198, Hyde Park 36, Mass.
1405 W. Erie Ave., Phila. 40, Pa.
55 Caroline Rd., Gowanda, N. Y.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS

Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering

Two Rector Street — New York
209 S. LaSalle Street — Chic. 4, Ill.
1625 I Street, N.W. — Wash. 6, D. C.

Hardesty & Hanover

Consulting Engineers

Successors to Waddell & Hardesty

Bridges
Long Spans of All Types
Movable—Lift, Bascule and Swing
Hanover Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

F. H. Dechant, E. J. Quirin, E. H. Harlow

Harbors, Piers & Bulkheads, Drydocks.
Foundations, Soil Mechanics.
Sanitary & Industrial Waste Disposal.
Water Supply, Flood Control.
Airports, Highways, Bridges.
Power, Industrial Plants, Buildings.

27 William Street — New York
3 William Street — Newark
Fidelity Phila. Trust Bldg. — Philadelphia

Hazen & Sawyer

Engineers

Richard Hazen — Alfred W. Sawyer
Water and Sewage Works,
Industrial Waste Disposal,
Drainage
Reports, Design, Supervision of Construction and Operation

110 East 42nd St., New York 17, N. Y.

Howard, Needles, Tammen & Bergendoff

Consulting Engineers
Bridges and Structures

New York, N. Y., 55 Liberty St.
Kansas City, Mo., 1805 Grand Ave.

Knappen-Tippetts-Abbett-McCarthy

Engineers

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

Moran, Proctor Mueser & Rutledge

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

New York 17, N. Y. 420 Lexington Ave.

PARDO, PROCTOR, FREEMAN & MUESER
Ap. Corrfos 614 — Caracas, Venezuela

Parsons, Brinckerhoff Hall & Macdonald

ENGINEERS

Airports, Bridges, Tunnels, Highways, Traffic and Transportation Reports, Subways, Foundations, Harbor Works, Valuations, Power Developments, Industrial Buildings, Dams, Sewerage, Water Supply.

51 Broadway, New York 6, N .Y.

E. Lionel Pavlo

Consulting Engineer

Design, Supervision, Reports, Bridges, Highways, Expressways, Marine Structures, Industrial Construction Public Works, Airports

7 E. 47th St. — New York 17, N. Y.

Malcolm Pirnie Engineers

Civil & Sanitary Engineers

Malcolm Pirnie — Ernest W. Whitlock
Robert D. Mitchell — Carl A. Arenander
Malcolm Pirnie, Jr.

Investigations, Reports, Plans
Supervision of Construction and Operations.

Appraisals and Rates

25 W. 43rd St., New York 36, N. Y.

The Pitometer Company

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Water Measurements & Special Hydraulic Investigations
New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Waste, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts Assoc.

Weston Gavett-Stanley N. Williams
Consulting Sanitary Engineers

Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

30 Church Street, New York 7

Preload Engineers Inc.

Founded - 1934

Consultants in Prestressed Design

Designers of more than 800 prestressed concrete bridges, buildings, tanks and high pressure pipe lines erected in North America since 1934.

Carson Dobell — *B. H. Thwaits*
Eric Molke — *Cedric Steiner*

955 North Monroe Street, Arlington, Va.

Sanderson & Porter

Engineers and Constructors

New York • Chicago • San Francisco

Scheidenhelm, F. W.

Consulting Engineer

Hydraulic Engineering; Hydro-electric Development; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Law; Appraisals. 50 Church Street, New York 7, N. Y.

Seelye Stevenson Value & Knecht *Consulting Engineers*

Richard E. Dougherty, Consultant

Airports, Highways, Bridges, Dams, Water Supply, Sanitation, Tunnels, Piers, Industrial Plants, Reinforced Concrete, Steel, Industrial Waste Disposal, Foundations, Soil Studies.
Civil — Mechanical — Electrical

101 Park Avenue New York 17, N. Y.

Severud-Elstad-Krueger

Consulting Engineers

Structural Design - Supervision
Reports - Buildings - Airports
Special Structures

415 Lexington Avenue
New York 17, N. Y.

Singstad & Baillie

Consulting Engineers

Ole Singstad — David G. Baillie, Jr.

Tunnels, Subways, Highways
Foundations, Parking Garages

24 State St. — New York 4, N. Y.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding and following pages

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.
Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela, San Juan, Puerto Rico, Guayaquil, Ecuador.

D. B. Steinman

Consulting Engineer

BRIDGES

Design, Construction
Strengthening, Investigations, Reports, Advisory Service

117 Liberty St., New York 6, N. Y.

Henry W. Taylor

Consulting Engineer

Water Supply, Sewerage
Refuse Disposal, Incineration
Industrial Developments

151 W. Merrick Rd, Freeport, N.Y.

The J. G. White Engineering Corporation

Design - Construction
Reports—Appraisals

80 Broad Street, New York

Keis & Holroyd

Consulting Engineers

Formerly Solomon & Keis
since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings

Troy, N. Y. — Ft. Lauderdale, Fla.

Capitol Engineering Corporation

Engineers—Constructors—Management

Bridges — Dams
Planning — Airports
Sewage Systems — Water Works
Design and Surveys — Roads & Streets
Executive Offices Dillsburg, Penna.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Dams, Water Works, Sewage, Industrial Wastes & Garbage Disposal, Highways, Bridges & Airports, Traffic & Parking Appraisals, Investigations & Reports.

Harrisburg, Penna.

Branch Offices

Pittsburgh, Pa. — Philadelphia, Pa.
Daytona Beach, Fla., Pleasantville, N. J.

Modjeski and Masters

Consulting Engineers

Design, Supervision, Reports, Inspection and Investigations, of Bridges, Structures, and Foundations.

State Street Bldg. 33rd and Arch Sts.
Harrisburg, Pa. — Philadelphia 4, Pa.

Albright & Friel, Inc.

Consulting Engineers

Water, Sewage and Industrial Wastes Problems, Airfields, Refuse Incinerators, Dams, Power Plants, Flood Control, Industrial Buildings, City Planning, Reports, Appraisals and Rates, Laboratory.
121 Sc. Broad St., Philadelphia 7, Pa.

When you need a SPECIALIST in a hurry . . .

Engineering News-Record's Professional Service Section offers the quickest, most direct method of contacting consultants who may be available NOW.

Day & Zimmerman, Inc.

Engineers

Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials

New York — Philadelphia — Chicago

Frederick H. Dechant

Consulting Engineer

Chairman of the Board
Frederic R. Harris Inc.
Water Works, Industrial Wastes, Sewerage, Recovery Processes, Hydraulic Works, Gas Plants.
Philadelphia: Fidelity Phila. Trust Bldg. — New York: 27 William St.

Fridy - Gauker - Truscott & Fridy

Architects & Engineers

Water Sewerage - Industrial Waste Incineration - Power & Distribution
Airport - Building - Town Planning
1321 Arch Street - Philadelphia 7, Pa.

G. G. Greulich

Consulting Engineer

Investigations, Reports, Advice. Pile Foundations, Sheet Piling, Cofferdams, Bulkheads, Piers, Bridge Decks, Bank Vaults.

778 Osage Rd. — Pittsburgh, Pa.

Hunting, Larsen & Dunnells,

Engineers

Industrial Plants—Warehouses, Office and Commercial Buildings. Steel and Reinforced Concrete. Design and Supervision. Reports.

1150 Century Bldg., Pittsburgh, Pa.

Morris Knowles Inc.

Engineers

Water Supply and Purification Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.

Pittsburgh, Pa.

Peter F. Loftus Corporation

Engineering and Architectural Consultants and Designers

First National Bank Bldg.,
Pittsburgh 22, Pennsylvania

Cable Address—
"LOFTUS Pittsburgh"

Gilbert Associates, Inc.

Engineers • Consultants • Constructors

Reading, Pa.

Utilities • Industrials • Municipals
Power • Water • Sewerage

New York • Philadelphia • Washington
Rome • Manila • Medellin

Michael Baker, Jr., Inc.

The BAKER ENGINEERS, Civil Engineers, Planners, and Surveyors. Municipal Engineers, Airport Design, Highway Design, Sewage Disposal systems, Water Works Design and Operation, City Planners. All Surveys. Home Office: Rochester, Pa., Branch Offices: Jackson, Miss., Harrisburg, Pa.

Weigle Engineering Co.

CIVIL ENGINEERS

William E. Weigle — Robert E. Weigle
Donald K. Weigle — Robert A. Meckley
Sewers, Bridges, Airports, Municipal Work
Design and Construction Supervision
Estimates and Flood Control
30 N. Duke St., York, Pa.

SOUTH

Palmer and Baker, Inc.

Consulting Engineers - Architects

Naval Architects - Marine Engineers
Surveys-Reports-Design-Supervision
Consultation

Transportation and Traffic Problems
Tunnels-Bridges-Highways-Airports
Industrial Buildings
Waterfront and Harbor Structures
Graving and Floating Dry Docks
Vessels, Boats and Floating Equipment
Complete Soils, Materials and Chemical Laboratories

Mobile, Ala. — New Orleans, La.
Washington, D. C. — Houston, Texas

Polk, Powell and Hendon

Consulting and Designing Engineers

Municipal and Industrial Works, Investigations and Reports
621 Stallings Building,
Birmingham 3, Alabama

Duval Engineering & Contracting Co.

General Contractors

FOUNDATION BORINGS
For Engineers and Architects.

Jacksonville, — Florida

Rader Engineering Co.

Water Works, Sewers, Refuse Disposal, Ports, Harbors, Flood Control, Bridges, Tunnels, Highways, Airports, Traffic, Foundations, Buildings, Reports, Investigations, Consultations.

111 N.E. 2nd Ave., Miami 32, Florida

Law-Barrow-Agee Laboratories, Inc.

Soils Engineers & Consultants

Soil Testing—Soil Boring—Rock Drilling—Load Testing—Field Control—Engineering Studies—Chemical Analysis—Physical Testing
Box 1558 Atlanta 1, Ga.
Serving the entire South

Patchen & Zimmerman

Engineers

Construction Plant, Cofferdams, Structures, Industrial Plants, Dams, Sewerage and Sewage Treatment, Water Supply and Treatment. Supervision, Surveys, Reports.

Augusta, Ga. — Anniston, Ala.

Eustis Engineering Company

FOUNDATION AND SOIL MECHANICS INVESTIGATIONS

Soil Borings — *Laboratory Tests*
Foundation Analyses — *Reports*

3635 Airline Highway
New Orleans 26, La.

Atlas Engineering Corp.

Industrial Plant Design • Research Laboratories • Nuclear Development Facilities • Housing and Public Works • Investigations • Reports

Knoxville and Oak Ridge Tennessee

MIDDLE WEST

Alvord, Burdick & Howson

CONSULTING ENGINEERS

Water Works — Sewerage
Water Purification — Sewage Treatment
Flood Relief — Power Generation
Drainage — Appraisals

20 North Wacker Drive, Chicago

A. J. Boynton & Co.

ENGINEERS

Fixed and Movable Bridges
Structures
Foundations

Design
Construction

100 N. Wabash Ave., Chicago 2.

Consoer, Townsend & Associates

Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.
351 East Ohio St., Chicago 11, Illinois

Ralph H. Burke, Inc.

CONSULTING ENGINEERS

Complete Architectural and Engineering Services
Plans, Supervision, and Reports

Expressways - Grade Separations
Traffic Studies - Parking Structures
Underground Garages- Shore Protection
Parks-Field Houses-Municipal Works
Airports and Air Terminal Buildings

20 North Wacker Drive, Chicago 6, Ill.

De Leuw, Cather & Company

CONSULTING ENGINEERS

Transportation, Public Transit and Traffic Problems

Industrial Plants — Grade Separations
Railroads — Expressways
Subways — Tunnels
Power Plants — Municipal Works

150 North Wacker Drive
Chicago 6, Ill.

79 McAllister Street
San Francisco 2, Calif.

Greeley and Hansen

Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal

220 S. State Street, Chicago 4

Harza Engineering Co.

Consulting Engineers

L. F. Harza
E. Montford Fucik — Calvin V. Davis
Hydroelectric Plants and Dams
Transmission Lines
Flood Control, Irrigation
River Basin Development
400 West Madison Street — Chicago 6

Pan American Consultants

Engineers

River & Harbor Development-Hydroelectric Power-Dams-Ports-Flood Control-Irrigation-Reclamation-Airports-Water Supply-Sewage & Industrial Waste Treatment
Reports - Consultation - Design
Midland Bldg., 176 W. Adams St., Chicago 3.

Hazelet & Erdal

CONSULTING ENGINEERS

Fixed Bridges, Movable Bridges, Industrial Plants, Expressways, Airports, Dams
Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Commerce Bldg., Louisville 2, Ky.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - - Gas
Public Utilities - - Industrials

231 So. La Salle St. — Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision
Chicago

The Hinchman Corporation

Consulting Engineers

CORROSION CONTROL — Surveys, Reports, Design, Specifications, Evaluation

UNDERGROUND UTILITIES—Location, Mapping, leakage surveys, electrical grounding systems

HOLLOW PILING — Directional Surveys by electronics

Francis Palms Bldg. — Detroit 1, Mich.

Consult these Specialists:

Let them save your time by bringing their broad experience in their specialty to bear on your problems.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on preceding pages

Chas. W. Cole & Son

Sewerage, Sewage Treatment, Industrial Wastes, Water Supply, Water Treatment, Airports, Industrial Buildings.
Chas. W. Cole, Sr. Chas. W. Cole, Jr.
Ralph J. Bushee, M. J. McErlain
220 W LaSalle, South Bend, Ind.

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Reports and Plant Location Surveys
New York CLEVELAND Los Angeles
Chicago Houston Oakland
Detroit Seattle

Havens and Emerson

W. L. Havens C. A. Emerson
A. A. Burger F. C. Tolles F. W. Jones
W. L. Leach H. H. Moseley J. W. Avery
CONSULTING ENGINEERS
Water, Sewerage, Garbage, Industrial Wastes, Valuations—Laboratories
Leader Bldg. Woolworth Bldg.
Cleveland 14 New York 7

Edward Jabour

Consulting Electrical Engineer
Design & Layout
Utilities, Oil Refineries,
Process (Chemical & Industrial Plants)
Special Services—To Contractors,
Chemical Plants, Piping Fabricators
1080 Atlantic Toledo, Ohio
Walbridge 5671 Ext. 24

Toledo Testing Laboratory

Engineers—Chemists

Concrete — Soils — Asphalt
Inspection Research
Tests Development
Foundation Investigation
Borings — Diamond Drilling — Load Tests
Soils Mechanics Laboratory

1810 North 12th St. Toledo 2, Ohio

Jones, Henry & Williams

Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal
Security Building Toledo 4, Ohio

REMEMBER!!

You can depend on these consultants for a fast, accurate solution to your problems. Consult them when necessary.

WEST OF MISSISSIPPI

Heron Engineering Co.

Consulting Engineers

For all types of Aerial Tramways, Cableways, and Suspended Structures
3009 South Acoma St.
Denver 19, Colorado

Stanley Engineering Company, *Consulting Engineers*

Airports - Drainage - Electric Power
Flood Control - Industrial - Rate Studies Sewerage - Valuations - Water Works
Hershey Building Muscatine, Ia.

Black & Veatch

Consulting Engineers

Water - Sewage - Electricity - Industry
Reports, Design, Supervision of Construction, Investigations, Valuation and Rates.

4706 Broadway, Kansas City 2, Mo.

Burns & McDonnell

Consulting and Designing Engineers

P. O. Box 7088, Kansas City 2, Mo.

1404 E. 9th St., Cleveland 14, Ohio

Harrington & Cortelyou

Consulting Engineers
Frank M. Cortelyou
E. M. Newman F. M. Cortelyou, Jr.
Movable and Fixed Bridges of All Types, Foundations, and Related Structures.
1004 Baltimore Kansas City 6, Mo.

Russell and Axon

Consulting Engineers

Civil — Sanitary — Structural
Industrial — Electrical
Rate Investigations

408 Olive St. St. Louis 2, Mo.
Municipal Airport, Daytona Beach, Fla.

Sverdrup & Parcel, Inc.

Consulting Engineers

Bridges, Structures and Reports, Industrial and Power Plant Engineering.

Syndicate Trust Bldg., St. Louis 1, Mo.
220 Bush St., San Francisco 4, Calif.

CHECK this Section whenever you need professional advice.

William J. Wenzel

Consulting Engineer

Great Falls, Montana

Developing the Great Northwest

Benham Engineering Co.

Established in 1909

Design and Construction Engineering Services for Water and Sewage—Highways and Structures—Airports—Power and Heating Plants
Suite 550 American National Building
Oklahoma City, Oklahoma

Lockwood & Andrews

Consulting Engineers

Airports, Paving, Industrial Plants, Drainage & Sewerage, Site Locations, Soils & Foundations, Water Supply, Structures, Harbor Works, Valuations, Reports — Design — Supervision
Union Nat'l Bank Bldg., Houston, Tex.

FAR WEST

John S. Cotton

Consulting Engineer

Hydroelectric, water supply, irrigation, and multiple purpose projects; flood and erosion control; river basin development planning; dams and their foundations; tunnels; marine structures; valuations; rates.
28 Brookside Dr., San Anselmo, Calif.

D. B. Gumensky

Civil and Structural Engineer

Hydroelectric Power, Water Supply
Dams, Tunnels, Unusual Structures
All Types Structural Design
Complete Development of Projects
1047 Sierra, Berkeley, Calif.

International Engineering Company, Inc.

ENGINEERS

Investigations - Reports - Design
Procurement - Field Engineering
Domestic and Foreign
74 New Montgomery St.
San Francisco 5, California.

FOREIGN

Hutchings & Milani, Ltd.

Engineers & Constructors

Industrial - Roads - Power Plants - Dams - Tunnels - Harbor Works - Foundations - Hotels
CARIBBEAN - WEST INDIES - SOUTH AMERICA
BERMUDA-CARIBBEAN CONSULTANTS, LTD.
Architects & Engineers.
Design - Reports - Investigations
L. C. Milani, ASCE; C. W. Abbott, R.I.B.A.; N. J. Senesey, A.I.A.; P. Collet; T. F. Carr, H. J. Williams; S. H. Pace; W. Weir.
BOTH HEAD OFFICES AT HAMILTON, BERMUDA.

Atlantic, Gulf and Pacific Company of Manila

Engineers
Design - Construction
Inquiries invited for work in the Philippines and Far East.
P. O. Box 626, Manila, Philippines
Cable Address: DREDGING Manila

The Foundation Engineering Company of Puerto Rico

Consulting Engineers

Foundation and Soil Mechanics Investigations, Laboratory analyses, reports and recommendations, design of structures, Supervision.
P. O. Box 331, San Juan, Puerto Rico

INSPECTION & TEST

Robert W. Hunt Company

Inspection and Tests of Engineering Materials and Equipment.
General Offices and Laboratories
175 West Jackson Blvd., Chicago 4
All Principal Cities

Johnson Soils Engineering Laboratory

Engineering design and construction tests run from MOBILE LABORATORY UNITS at construction site.
Field load bearing tests.
193 West Shore Ave., Bogota, N. J.
Bogota-Hubbard 7-4408

The Haller Testing Laboratories, Inc.

Testing and Inspection of Construction Materials

Complete Soils Laboratory

Load Tests—Soils & Structures

Concrete and Bituminous Materials

801 2nd Ave., New York 17, N. Y.
Plainfield, N. J. New Haven, Conn.
Boston, Mass.

Engineers Testing Laboratory, Inc.

Foundation and Soil Mechanics Investigations

Soil Borings Laboratory Tests
Foundation Analyses Reports
3313 Main St. Houston, Texas

MARINE DIVING

Walter Detrick

Marine Diver

Construction • Repair • Salvage
Quincy, Illinois
9006 Phones 758

SEARCHLIGHT SECTION

This index is published as a convenience to the reader. Every care is taken to make it accurate but SEARCHLIGHT SECTION assumes no responsibility for errors or omissions

Albert Pipe Supply Co., Inc. 68
Allied Construction Equipment Co. 65
Ambursen Dam Co., Inc. 65
American Air Compressor Corp. 65
Amerlux Steel Products Corp. 66
Brandeis Machinery & Supply Co. 67
Clemens Construction Co. 65
Concrete Equipment Co. 66
Consolidated Engineering Co. 65
Contractors Machinery Co. 66
Contractors Trading & Equipment Corp. 65
Cooney, G. A. 67
Costello, Patrick J. 64
Davidson Pipe Co., Inc. 68
Deatherage & Son, George E. 64
Drachman Steel Co., Inc., Hy. 68
Economy Nursery Co. 65
Frank, M. K. 67
Frazier-Davis Construction Co. 65, 68
Gillis & Co. 67
Glazer-Steel Corp. 64
Globe Pipe & Fitting Co. 68
Goodman, Al. J. 68
Haskell, Jr. P. H. 65
Howard, Needles, Tammen & Bergendoff 63
Hughes Bros., Inc. 67
Hunkin-Conkey Constr. Co. 67
McDonald, J. C. 66
Midwest Steel Corp. 67
Mississippi Valley Equipment Co. 66
Orban Co., Inc., Kurt 66
Park, A. M. 68
Perini & Sons Inc., B. 67
Reading, Inc., Eugene P. 66
Smith Co., H. Y. 65
Southeastern Elec. Const. Co. 65
Southern Gateway Co. 63
Stanhope Inc., R. C. 66
Surplus Clearing House 68
Tagco, Inc. 68
Testa Bros. Inc. 65
Tractor & Equipment Co. 68
United Foundation Corp. 65
Williams Construction Co. 65
Williams & Son, Ichabod, T. 67
Wilson Engineering Co. 64

Shorter and lighter!

than any truck mixer of similar capacity

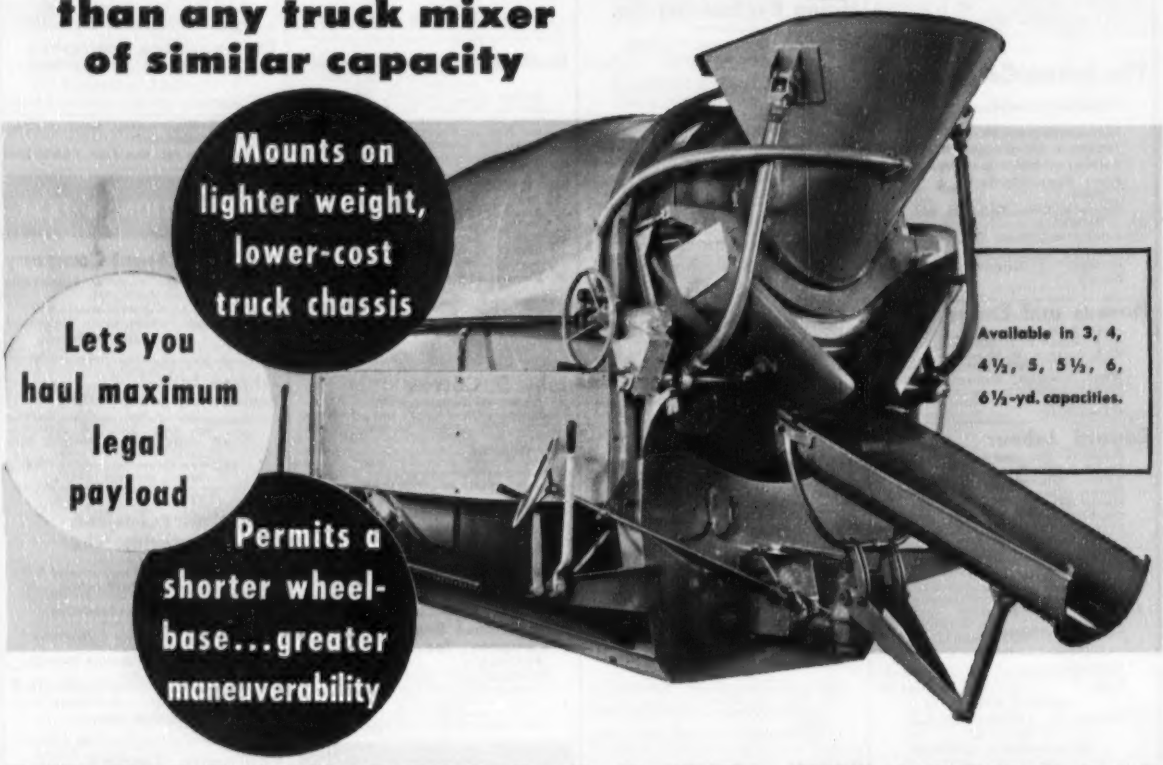
Mounts on lighter weight, lower-cost truck chassis
Lets you haul maximum legal payload
Permits a shorter wheel-base...greater maneuverability
Available in 3, 4, 4½, 5, 5½, 6, 6½-yd. capacities.

LE ROI-TRANSO LOAD CHAMPION

You carry full rated capacity within gross vehicle weight limits . . . make more round trips daily . . . and cut costs all around — with the Le Roi-Transo Load Champion.

Light weight and compactness are only two of the reasons why you enjoy such profitable performance. The patented Transo direct drive is another. It reduces non-productive dead-weight — eliminates ring gears, chains, and sprockets; thus cuts replacement and maintenance costs.

The Load Champion has many other equally practical features, other operating advantages. It has good mixing action. It loads fast. It discharges slump concrete speedily. It starts and discharge-reverses with a full load without shock.

Ask your Le Roi-Transo distributor to give you all the details. Or write for bulletin.

Le Roi-Transo DeLuxe Transo-mixer. 12" to 17" shorter than any other mixer-agitator of equal capacity—1,000 to 1,600 lbs. less dead-weight. 3, 4, 4½, 5, 5½, 6, 6½-yd. capacities. Available with fluid couplings or torque converters.

TD-11

LE ROI COMPANY

A Subsidiary of Westinghouse Air Brake Co.

TRANSO DIVISION

3716 W. WISCONSIN AVE. • MILWAUKEE 8, WIS.

Plants: Milwaukee • Cleveland — Greenwich — Dunkirk, Ohio • Coldwater, Michigan.

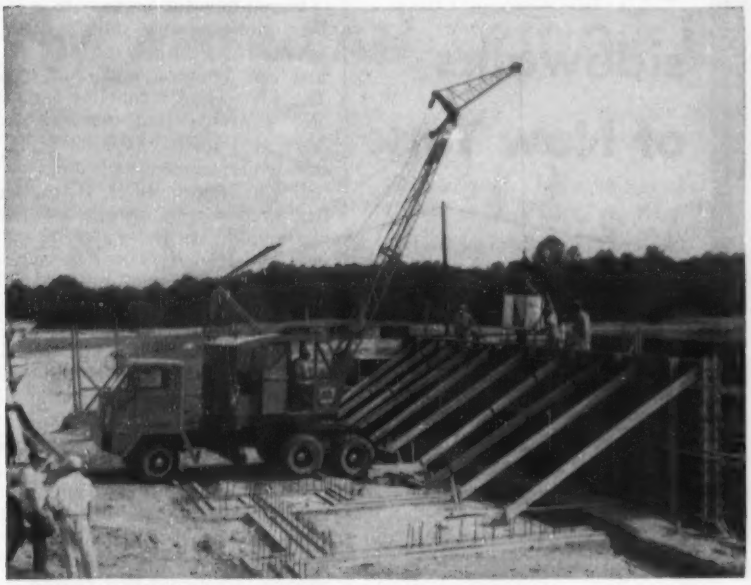

MANEUVERABILITY and versatility are key features of this new crane carrier.

Schield offers two-position carrier

The big feature of the new Bantam crane carrier is its 16½-ft turning radius that adds usefulness through maneuverability; however, it is readily pointed out that stability is in no way sacrificed.

Built to mount a Schield Bantam Model T-35, the carrier has two positions for mounting of the upper machinery. In the forward position, the machine is mounted 24 in. ahead of the bogie center on the carrier to give the operator fullest use of the Bantam's 6-ton lifting capacity. This forward position is also said to offer greater stability when the operator is working with any of the other crane attachments such as clamshell, dragline, etc.

The rear mounting position is 6 in. ahead of bogie center and is used for digging operations with back hoe and shovel attachments.

The carrier frame is fabricated from 12-in. I-beams and is mounted on six axles—ratings are 6,000 lb front, 26,000 lb on rear axles. The ten-wheeler mounts big 8.25x20 tires, and for even greater traction is equipped with a differential lock-out on the driving axles.

Power is supplied by a Hercules JXC 6-cyl gas engine developing 113 hp at 3,200 rpm. A dual range, five-speed transmission permits ten speeds forward and two reverse.

The rig measures a little more than 19 ft in length and is less than 9 ft high from the ground to the top of the basic unit cab. Width is 8 ft; wheelbase is 148 in. Total weight of the carrier less the basic crane unit but with front and rear outriggers and fenders is 11,600 lb. Front and rear pin-connected pull-out outriggers and fenders are optional at extra cost. SCHIELD BANTAM CO., WAVERLY, IOWA.

$40 fuel filter

Can save hundreds in injector repair bills

Diesel engine owners who recently have shelled out $75 per cylinder for an injector overhaul can appreciate readily the value of a filter-separator system that removes solid contaminants and all of the water from diesel fuel. Fram's new product—selling for only $40—offers owners just such a potential.

Injector parts, as any diesel mechanic knows are, generally speaking, as sensitive as an open wound. The smallest fleck of rust, dirt or other foreign matter can destroy the efficiency of an entire combustion cylinder. But solids aren't the only danger, it is now generally accepted that water can cause acid corrosion of the delicate parts, and if the water is in sufficient quantity and flowing at high speeds, a severe erosive action is set up between the highly polished surfaces of the valve seats and the finely machined holes in the injector nozzles. In any event, the result is higher fuel consumption, lower efficiency of the

(Continued on page 74)

No overhead cables on new scraper

Bucket and conveyor loading is facilitated on the new line of Westinghouse-LeTourneau scrapers by the elimination of overhead cables. Instead, the cables are reeved from a double drum power control unit through swinging, self-aligning sheaves mounted in front of the scraper yoke. The scrapers are available in four sizes in capacities ranging from 10½ to 28½ cu yd heaped. The Model O-14 shown here being dragline-loaded is the smallest of the group, but, like the other three, features high apron lift for loading and unloading of big boulders and is of all-welded construction. LeTourneau-Westinghouse Co., Peoria, Ill.

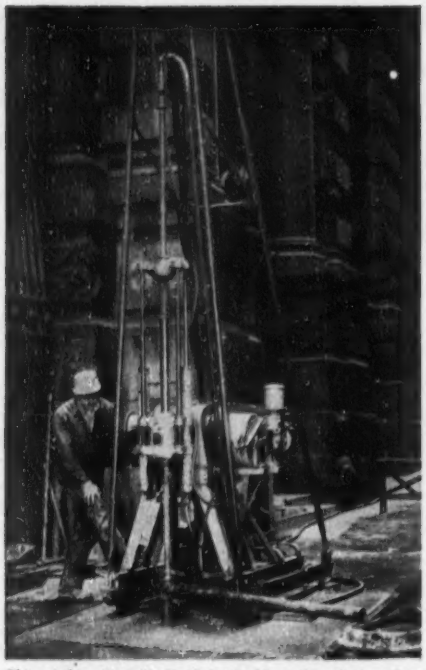

This Acker Teredo Drill is Making Foundation Test Borings preparatory to Erection of a New Skyscraper.

on the sidewalks of New York

Here's one of two Acker Teredo Diamond Core Drills on the job for Raymond Concrete Pile Company, making foundation test borings in the heart of the busy financial section of New York City. As repeat purchasers of Acker drills, Raymond knows the dependability, compactness and versatility that characterizes Acker design.

For prices and information, write for Bulletin 30, ENR.

ACKER DRILL CO., Inc.

725 W. Lackawanna Avenue
Scranton, Penna.

a complete line of Diamond and Shot Core Drills, Drilling Accessories and Equipment

THIS "COMPLETE"
WELLPOINT PUMP
more efficient, more economical, than more costly units



We call it the "Little Giant". Contractors call it a great big boon in a compact package. This little unit, with 6" suction and discharge, handles up to 1200 gpm — may be used for open sump work, for well-pointing and for jetting "Complete" wellpoints (if you're wise) into the ground. Its 1695 pounds are mounted in a 2-wheel chassis that is easily towed behind any vehicle. *Sold* at a surprisingly reasonable price; *Rented* if you prefer it that way. Particulars are free. Write today.

COMPLETE MACHINERY & EQUIPMENT COMPANY, INC.
36-40 11TH STREET
LONG ISLAND CITY, N. Y.

COMPLETE
WELLPOINT SYSTEMS

INVESTIGATE
Vibroflotation

Cut Foundation Cost by this modern method of sandy Soil Compaction.

Plan no projects, where soil is granular, until you find out if Vibroflotation is adaptable. This money-saving process of soil compaction increases load bearing capacity . . . diminishes void volume, permeability and active soil pressure . . . eliminates settlement under vibratory loads.

Write for new Bulletin . .
Important facts for engineers about Vibroflotation.

V-6

VIBROFLOTATION FOUNDATION CO.
575 Sixth Ave. - Pittsburgh 19, Pa.
ATlantic 1-2500

engine and eventually the need for an engine or ejector overhaul.

Here's how the Fram system works. The filter-separator unit consists of two tandem cylinders mounted on the fuel line between tank and engine. The first cylinder contains a replaceable cartridge that removes solids down to 1 micron (0.000039 in.) in size while condensing water in the fuel into large droplets. The cleaned fuel then passes through a connecting nipple into the water separating unit. Water is collected on the outside of the separator unit and drops down into the sump. A drain valve is used to remove the collected water.

The new unit can be installed quickly on diesel engines up to 225 hp and works equally well on both fresh and salt water.

During the last year the filter has been tested extensively on many types of diesel equipment under a wide variety of climatic and job conditions. These tests have been successful enough to warrant the company's offering of a money-back guarantee on the unit. FRAM CORP., PROVIDENCE 16, R. I.

Striper sprays standard or reflective highways paints

A new low-priced traffic lane marker sprays on either standard or reflective bead-type paints in a single stripe, solid or intermittent, at a rate of 3 to 5 mph.

Known as the Model 6-18, the striper has an 18-gal ASME-approved safety tank and is powered by a 6-hp Wisconsin engine. The spray gun can be set for center line marking or may be mounted on a frame outside of the wheels, either right or left, to permit working close to safety islands, curbs, etc.

The unit is self-propelled with a pivot arrangement of the rear wheel that enables it to conform to any marking job. The operator rides on a built-in trailer platform with all controls within reach. Additional features

(*Continued on page 76*)



IN PITTSBURGH'S GOLDEN TRIANGLE . . .

34,200 Tons of Steel Frame Construction by AMERICAN BRIDGE in 24 months!

PITTSBURGH'S new buildings have been the talk of the business world. Few cities anywhere have experienced as much commercial construction in so short a time.

For example, in the famous Golden Triangle, busy hub of this hustling metropolis, American Bridge alone erected 34,200 tons of steel framework for six towering new buildings in the two year period between April 3, 1950 and March 31, 1952.

American Bridge fabricated and erected all structural steel for the 41-story building known as 525 William Penn Place; the 31-story Alcoa building; the three Gateway Center buildings (one of which is 24-stories, and two 20-stories); and the 20-story Bigelow Apartment House.

Such an accomplishment is unusual only in the fact that all buildings are located in the downtown area of a single city . . . and that all were under construction at practically the same time. The interesting point is that one company had the facilities, the skilled manpower, and the engineering know-how to handle six sizable jobs like these with such speed and efficiency without disrupting the time schedule of the numerous other construction projects which it was handling in other parts of the country.

It only goes to prove that no job is too large for American Bridge. If you would like to know more about the advantages of American Bridge fabricated and erected construction, call our nearest office.

RECENT ADDITIONS TO PITTSBURGH'S SKYLINE

525 William Penn Place
14,000 tons of Structural Steel

Alcoa Building
6,400 tons of Structural Steel

Gateway Center Buildings (3)
12,000 tons of Structural Steel

Bigelow Apartment House
1,800 tons of Structural Steel

AMERICAN BRIDGE DIVISION, UNITED STATES STEEL CORPORATION
GENERAL OFFICES: 525 WILLIAM PENN PLACE, PITTSBURGH, PA.
Contracting Offices in: AMBRIDGE • ATLANTA • BALTIMORE • BIRMINGHAM • BOSTON CHICAGO • CINCINNATI • CLEVELAND • DALLAS • DENVER • DETROIT • ELMIRA GARY • MEMPHIS • MINNEAPOLIS • NEW YORK • PHILADELPHIA • PITTSBURGH PORTLAND, ORE. • ROANOKE • ST. LOUIS • SAN FRANCISCO • TRENTON
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

AVAILABLE NOW! *For showing in churches, schools, clubs and industries, the new sound and color motion picture— BUILDING FOR THE NATIONS — a candid, factual photographic record of the highlights of the fabrication and erection of the United Nations Secretariat Building.* For free bookings, write Pittsburgh office.

AMERICAN BRIDGE

USS

UNITED STATES STEEL

Better working conditions with COOLITE

General Contractor—
Joseph Bucheit & Sons, Youngstown, Ohio
Glazing—Pittsburgh Plate Glass Company, Youngstown, Ohio

Employes of the General Fireproofing Co., modern office furniture and fixtures manufacturer in Youngstown, Ohio, see better, feel better, work better in areas flooded with conditioned daylight. Eye comfort is an important factor in improved working conditions; so approximately 29,000 sq. ft. of Coolite, Heat Absorbing and Glare Reducing Glass were installed to provide copious quantities of natural illumination at low cost. For Coolite removes the harmful elements of "raw" sunlight...cuts glare that causes eye fatique and costly mistakes... absorbs up to 50% of solar heat to make interiors more comfortable.

Rolled, Figured and Wired glass by Mississippi is "visioneered" for better daylight illumination. Available in a wide variety of surface finishes all scientifically designed to distribute light to best advantage. In your building or remodeling projects specify Mississippi Glass.

Send for free catalog, "Coolite Heat Absorbing and Glare Reducing Glass."

MISSISSIPPI Glass COMPANY
88 ANGELICA ST. SAINT LOUIS 7, MO.
NEW YORK • CHICAGO • FULLERTON, CALIF.
WORLD'S LARGEST MANUFACTURER OF ROLLED, FIGURED AND WIRED GLASS

GUNITE
Since 1913
CONCRETE
SAND AND CEMENT
Placed by Air
38 YEARS OF EXPERIENCE PLUS—
Hundreds of nationally known clients is evidence of our engineering and construction ability to produce "Gunite" concrete construction at a lower overall cost.
Send for specifications and bulletins—no obligation.
See our catalog in Sweets
GUNITE CONCRETE & CONST CO
ENGINEERS — CONTRACTORS
1301 WOODSWETHER RD. KANSAS CITY, MO
CHICAGO — ST. LOUIS — MINNEAPOLIS
DENVER — HOUSTON — NEW ORLEANS

"Rite in the Rain"
WATERPROOF
PRINTED FORMS FOR
- Engineers
- Loggers
- Lumbermen

WILL STAND SEVEREST TESTS
FREE SAMPLES ON REQUEST
J. L. DARLING COMPANY
BROWNS POINT TACOMA, WASH.

include a paint strainer in the circuit, paddle type paint agitator and a cleaner tank. MEILI-BLUMBERG CORP., NEW HOLSTEIN, WIS.

Weight and thickness cut, insulating value retained

Thinner, lighter insulation for water and low pressure steam lines is the manufacturer's promise for a new glass fiber product. It is said that the extra heat stopping value of the Fiberglas allows a ½-in. thickness to equal the performance of ¾ to 1-in. thicknesses of many other insulating materials commonly used in the low pressure fields.

The insulation is available with a canvas covering for installation on hot water or low pressure lines and with a black jacket of asphalt saturated kraft paper to protect against condensation on cold water lines.

Other advantages claimed for the material are that its inert fibers are rot and corrosion proof, its light weight permits easy installation and it will not buckle or sag under changes occurring in humidity or temperature conditions.

However, cold line application is limited to cold water temperatures since chilled water, ice water or refrigerated brine lines normally require greater thickness of insulation. Another product of the manufacturers, Fiberglas Dual Temperature insulation is recommended for these applications. OWENS-CORNING-FIBERGLAS CORP., NICHOLAS BLDG., TOLEDO 1, OHIO.

Added powdered metal doubles welding speed

The addition of powdered metal to the coating of a new electrode is reported to weld mild steels at speeds double those obtained with more conventional types.

According to the manufacturer, the powdered metal changes the arc action so that welds can be made by dragging the electrode in contact with the plate. Because the metal powder becomes part of the weld bead, faster welding is achieved. It is also said that spatter is decreased to less than half that obtained with regular electrodes. Tests have shown that beads produced with this Airco Easyarc 12 are exceptionally smooth and the weld metal is of high strength, good ductility and X-ray soundness.

Further information is contained in bulletin ADC 650. AIR REDUCTION SALES CO., 60 E. 42ND ST., NEW YORK 17, N. Y.

NOW the World's first construction hauler with 8-Speed Hydra-Matic Drive!

IT's been THE dream for years. Now GMC's sensational new M470 makes it reality—*a truck that conquers the truck-killing strains of construction hauling with 8-speed Truck Hydra-Matic.*

It's a truck that shifts *itself* to whisk top loads up the toughest grades—with the least engine effort. Its axle and drive line can't be shock-loaded. It never needs clutch repairs or replacement.

It's a truck that *automatically* maintains peak efficiency on the road, off-the-highway—or back and forth a hundred times a day. And misers your fuel as it goes.

It's a truck that also offers Safety Power Steering* to wipe out 75% of the steering effort. And—with truck-control so much easier—drivers stay more alert—safety records improve.

What's more, the M470 teams all this with a power plant that's—pound-for-pound—the mightiest in gas truck history. Famed GMC ruggedness is greater than ever.

And price? You'll be amazed at how little it costs to put this new Hydra-Matic sensation on *your* profit-making team. See your GMC dealer—and see for yourself! *Optional at extra cost*

Get a modern truck!

GMC Truck & Coach Division of General Motors

Illustrated is GMC's 145 H.P. M470—22,000 GVW

The New, Improved

H & B TYPE "T" Asphalt Plant

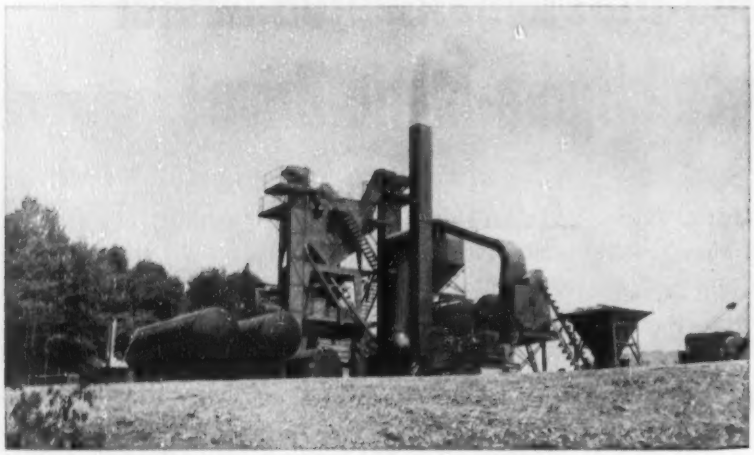

Outstanding Efficiency In Both Production and Maintenance

Here, for the first time, is an asphalt mixing plant that gives you—in the basic plant—all of the major improvements and refinements of the past twenty years. An entirely welded structure, with no rivets and only a few bolts. Also, much of the loose bracing and miscellaneous pieces have been eliminated, making it possible to provide adequate working space and platforms with a minimum of pieces to move.

Other improvements include: all overflows are self-contained and internal in the bin; self-contained dust bin, which is an integral part of the bin structure; elimination of the screw conveyor normally used to feed dust into the aggregate weigh-box, thereby making possible a lower original investment in plant, and assuring lower maintenance costs and decreased possibility of breakdown.

This new Type "T" plant has already proved its dependability and efficiency, with outstanding records in both production and maintenance. Available with all units driven by individual electric motors and completely wired, with gasoline or Diesel engines on the main units and electric drive on the smaller units, or with gasoline or Diesel drive throughout. Complete information will be furnished on request.

H&B ESTABLISHED 1907

HETHERINGTON & BERNER INC.

America's First Builders of Asphalt Mixing Plants

730 KENTUCKY AVENUE INDIANAPOLIS 7, INDIANA

DRILLING CONTRACTORS

Diamond and Shot Core Borings
Dry Sample Borings
Grout Holes and Pressure Grouting
Foundation Testing for Bridges, Dams and other Heavy Structures

Manufacturers, also of Diamond Core Drilling Machines and complete accessory equipment, including all types of Diamond Drilling Bits. Ask for Bulletin 320.

SPRAGUE & HENWOOD, Inc.
Dept. E, Scranton 2, Penna.

Would you use 1925 construction equipment today? No. Why not change over and equip your jobs with modern office trailers and cut costs.

CONTRACTORS' OFFICE TRAILER

Models 23½'—30'—35' Price $2170 to $3580 Birch finish, drafting table, 2 built-in desks with letter files & drawers, other conveniences. Can offer three years' finance plan. Write for pictures and plans.

TRAILER VILLAGE SALES, INC.
8642 Pulaski Highway, Baltimore 21, Md.
Phones: Murdock 7-2233

PUBLICATIONS

Sewage pumps—The line of Yeomans non-clog vertical sewage pumps is described in Bulletin No. 6251. Space in the bulletin is devoted to the introduction and complete explanation of the new package sewage lift station designed for use in subdivisions, trailer parks, villages and similar projects.—YEOMANS BROS. CO., 1999 N. RUBY ST., MELROSE PARK, ILL.

Wire rope slings—The complete line of American Tiger wire rope slings is outlined in a 98-page catalog. The book is broken down into six sections that describe Tiger wire rope fittings, regular laid slings, braided four-part slings, braided six-part slings, braided eight-part slings and wire rope slings. Each section gives complete details and specifications on the particular type of sling with which it is concerned.—AMERICAN STEEL & WIRE DIV., UNITED STATES STEEL, ROCKEFELLER BLDG., CLEVELAND 13, OHIO.

Joint sealers—A new catalog describes a line of cold applied paving joint sealers for use on concrete and bituminous highways, streets, bridge decks, canal linings, airport aprons and runways and other heavy construction projects. Covered in the catalog are laboratory data, specifications and methods of application. Presstite cold applied paving joint sealers are described as sufficiently tough and elastic to withstand heavy traffic, cold and heat, with maximum adhesion and resilience to allow for repeated expansion and contraction of the pavement and still prevent infiltration of water and moisture. Application is also described as easy, rapid and economical. The catalog includes descriptions of equipment for use in applying the sealants.—PRESSTITE ENGINEERING CO., 3786 CHOUTEAU AVE., ST. LOUIS 10, MO.

Pull and lift—The Pul-Lift, a chain hoist design that either hoists or pulls, is illustrated and described in Bulletins P-260B and P-1260. Developed by Yale engineers to meet the demand for a general purpose tool, the Pul-Lift operates in close quarters by means of short strokes on a ratchet handle and can be used for riggers' equipment. It is available in ¾ to 15-ton capacities. Other advantages claimed for the device are maximum strength with minimum weight, self-actuated load brakes and complete flexibility.—THE YALE & TOWNE MFG. CO., ROOSEVELT BLVD. AND HALDEMAN ST., PHILADELPHIA 15, PA.

Acker Drill Co. 74
Acrow, Inc. 10, 11
American Bridge Div., U. S. Steel Corp. ... 75
American Steel Dredge Co., Inc. 55

Barber-Greene Company 79
Bethlehem Steel Co. 1
Blaw-Knox Equipment Div., Blaw-Knox Co. 35
Borden Metal Products Co. 18

Cement Gun Company 51
Chapman Valve & Mfg. Co. 49
Cole Mfg. Co., R. D. 54
Complete Machinery & Equip. Co. 74
Concrete Grinding Corp. 57
Concrete Surfacing Machinery Co. 54
Connors Steel Div. H. K. Porter Co. 14

Darling, J. L. Co. 76
Dart Truck Co. ..... 4th Cover
Dodge Corp., F. W. 56
Dresser Mfg. Div., Dresser Industries 27

Electric Steel Foundry 12
Enterprise Galvanizing Co. 55
Erie-Strayer Co. 4

Faber-Castell Pencil Co., A. W. 46

General Electric Co. ..... 2nd Cover
General Motors Truck Div., General Motors Corp. 77
Goodrich Co., The B. F. 5
Griffin Wellpoint Corp. 56
Grinnell Co., Inc. 3
Gunite Concrete & Const. Co. 76

Hetherington & Berner, Inc. 78

LeRoi Company 72
LeTourneau-Westinghouse Co. 40, 41

Macwhyte Co. 7
Mahon Co., R. C. 9
McGraw-Hill Book Co. 50
McKiernan-Terry Corp. 57
McKinney Drilling Co. 54
Mississippi Glass Co. 76
Moretrench Corp. 54

Naylor Pipe Co. 8
Newport News & Shipbuilding Drydock Co. 33

Ohio Locomotive Crane Co. 57

Patent Scaffolding Co. 13
Permutit Co., The 44

Raymond Concrete Pile Co. ..... 3rd Cover
Rockwell Spring & Axle Co. 51

Sauerman Bros., Inc. 55
Servicised Products Company 47
Sika Chemical Corp. 53
Sparling Meter Co. 47
Sprague & Henwood, Inc. 78
Standard Steel Spring Div., Rockwell Spring & Axle Co. 51

Terry Steel Contractors, Inc. 58
Timber Structures, Inc. 79
Trailer Village, Inc. 78
Truscon Steel Co. 39
Twin Disc Clutch Co. 43

Union Metal Mfg. Co. 6
U. S. Rubber Co. 20

Vibroflotation Foundation Co. 74
Vickers, Inc. 16

Waukesha Motor Co. 15
Wild Surveying Instrument Supply Co. of America 2

Professional Services 69, 70, 71

SEARCHLIGHT SECTION
(Classified Advertising)
H. E. Hilty, Mgr.

Employment 63, 64
Business Opportunities 64
Educational 64
Notices
Proposal 61, 62
Equipment
(For Rent, Sale, Wanted) 64-68

Timber Bridge Carries 100 Ton Load...

Bridge of J. Neils Lumber Co., Libby, Montana, consists of 155-foot center span and two side spans of 152 feet plus approaches. Truss members and floor beams are glued laminated timbers, fabricated to engineering detail, creosoted and assembled in place. Decking is longitudinally laminated planking. All metal hardware is galvanized.

This bridge, which required only six months for engineering, fabrication and erection, is designed to carry 100-ton loads of logs and equipment and to last for 75 years. It is typical of the ability of Timber Structures, Inc. to provide engineered structures at moderate cost and for long, hard service. It points the way to significent savings and minimum maintenance for private and publicly owned bridges.

Timber bridges are available in several types to fit varying conditions of service and site location. For detailed information, ask your nearest Timber Structures representative for the new booklet, "Timber Bridges", or write us direct.

TIMBER STRUCTURES, INC.

P. O. BOX 3782-C, PORTLAND 8, OREGON

Offices in Ramsey, N. J.; Chicago; Detroit; Kansas City; St. Louis; Minneapolis; Columbus; Milwaukee; Omaha; Des Moines; Wichita; Dallas; New Orleans; Birmingham; Charlotte; Louisville; Memphis; West Hartford; Seattle; Spokane; Eugene; Richmond, California; Peterborough, Ontario; New Westminster, B. C.

ENGINEERING NEWS-RECORD

330 West 42 St., New York 36—LOngacre 4-3000

D. S. Robertson, Advertising Sales Mgr.
Howard T. Olsen, Business Manager

ADVERTISING REPRESETNTATIVES:

New York, 36—330 W. 42 St.
M. J. Storz, E. A. Callahan, Jr.

Chicago, 11—520 No. Michigan Ave.,
F. G. Hudson, L. H. Hunt, W. G. Payne

San Francisco, 4—68 Post St.,
R. E. Dorland

Philadelphia, 3—17th and Sansom Sts.,
A. B. Cozzens, D. G. Jensen

Cleveland, 15—Hanna Bldg.,
E. Duff, Jr.

Detroit, 26—Penobscot Bldg.,
B. F. Horn

St. Louis, 8—Continental Bldg.,
W. E. Donnell

Los Angeles, 17—1111 Wilshire Blvd.,
H. L. Keeler

Atlanta, 3—Rhodes-Haverty Bldg.,
R. H. Sidur

Dallas, 1—First National Bank Bldg.,
J. H. Cash

OTHER SALES OFFICES:

Pittsburgh, 22—738-39 Oliver Bldg.
Boston, 16—350 Park Square Bldg.
London, McGraw-Hill House

one MAN



... with a B-G Portable Conveyor and a B-G Car Unloader unloaded a car of coal in

45 MINUTES

see your B-G distributor or write

Barber-Greene
AURORA, ILLINOIS, U. S. A.

EDITORIALS

No danger to dinosaurs

A FINE EXAMPLE of how mass hysteria can be used to distort public understanding of a major engineering undertaking is found in the current attack on the proposed Echo Park reservoir in Utah and Colorado. Spearheaded by the Sierra Club, a wildlife group on the Pacific Coast, the Federation of Western Outdoor Clubs is actively seeking to get all kinds of conservation and sporting organizations to send delegations to Washington to oppose approval of the Echo Park project at hearings that began Jan. 18.

By playing up the fact that the proposed reservoir would flood 43,000 acres of the 204,000-acre Dinosaur National Monument, the outdoor enthusiasts are leading the public to believe that the reservoir will include the dinosaur fossil beds. These truly remarkable pictures of our prehistoric past were put under the protection of the U. S. Park Service in 1915 by having the area in which they are located set up as a national monument. That engineers would damage this scientific wonder is unthinkable. The fact should be nailed down firmly that the stored waters will not come near the 80-acre area containing the fossils.

Echo Park reservoir is one of several planned as part of the program for conservation and use of the vast water resources of the Colorado River which culminated in the Colorado River Compact. Under that compact, the "Upper Basin" states must deliver 7,500,000 acre-ft of water annually to the "Lower Basin" states. To do that, the Upper Basin states must build large storage reservoirs. The Echo Park reservoir is superior to any alternate site because it stores water in the bottom of the deep canyons of the Green and Yampa rivers where evaporation losses will be low.

If these canyons were accessible to the public for recreational use, there might be a better-founded objection to using them for reservoir purposes, but they are not. They are practically inaccessible to all but a rugged few, just as was Boulder Canyon on the lower Colorado before Hoover Dam was built. Echo Park Dam, like Hoover Dam, will form a vast lake flooding only the lower part of the canyons of the Green and Yampa Rivers, opening the grandeur of the upper walls to thousands of people, just as Lake Mead has opened up Boulder Canyon.

As to the claimed "invasion" of the Dinosaur National Monument, the record appears to be clear that when the Park Service sought to have the area of the monument expanded from the original 80-acres containing fossil remains to its present area of 350 sq. mi., the Park Service agreed not to object to future water storage projects, which then were being planned. The presidential proclamation enlarging the monument is said to have such a reservation in it.

Hard facts like these, however, mean little to extremists who look on any change from natural conditions as bad. But it is to be hoped that when the hue and cry subsides, Congress will weigh all the facts dispassionately and do what it thinks will be most beneficial for the nation as a whole.

Spanish bases still beckon

THE BUREAU OF YARDS & DOCKS, the designated Defense Department construction agency for the bases in Spain project, has now made its choice of engineer and contractor groups to administer the program, which in its initial $150-million phase will include four airfields and a supply port (ENR Jan. 14 p 23). What happens next? It is a question charged with unusual interest to the profession at large and particularly to those firms which had set their sights on a Spanish job, only to be disappointed.

Because the agreement with Spain was so long in coming—and yet on the verge of being signed at almost regular intervals during the last two years or more—the roster of firms seeking a part in building the bases had lengthened to a veritable Who's Who of U. S. Construction. By the same token, the guessing as to who would be chosen had assumed the proportions of a national pastime. Those who believed they had a chance for the jobs went through alternating periods of elation and dejection as their hopes waxed and waned. Groups were formed, regrouped and disbanded. Seldom, if ever has such widespread turmoil developed over a design and construction assignment.

It is greatly to the credit of the Bureau of Yards and Docks that it handled this situation with calmness, objectivity and a great sense of responsibility. Not only did it accept for careful study all proposals made, but it attempted, by public appeal, to promote the submission of as many proposals as possible.

The choice went to four engineering firms and three contractors. The engineer group contains specialists in all of the classes of work required—port work, paving, structure design and utility planning, to mention the most obvious. At least two of the firms have had offshore experience. The contractor group has the further advantage of having worked together as a unit on a similar assignment in France, to have had much other foreign experience, and to have a large contingent of Spanish-speaking personnel.

Design and administration are, therefore, well taken care of. There remain the actual construction contracts, and these are scheduled to go to Spanish contractors on competitive bids. But both in the preparation of bids and in the carrying out of the work they are likely to want and require help. And this is where some of the U. S. firms that still covet Spanish jobs come in—on joint ventures with Spanish contractors. The Spanish bases still beckon.

...Raymond Features!

NUMBER ONE OF A SERIES

Raymond Piles maintain driving resistance

The steel shell of each Raymond pile retains the resistance developed in driving and protects the fresh concrete from distortion and from mixture with the surrounding soil. The heavy taper of the shell, with its wedge-like effect, usually results in a shorter pile per ton of load carried than straight-sided piles or those with less taper.

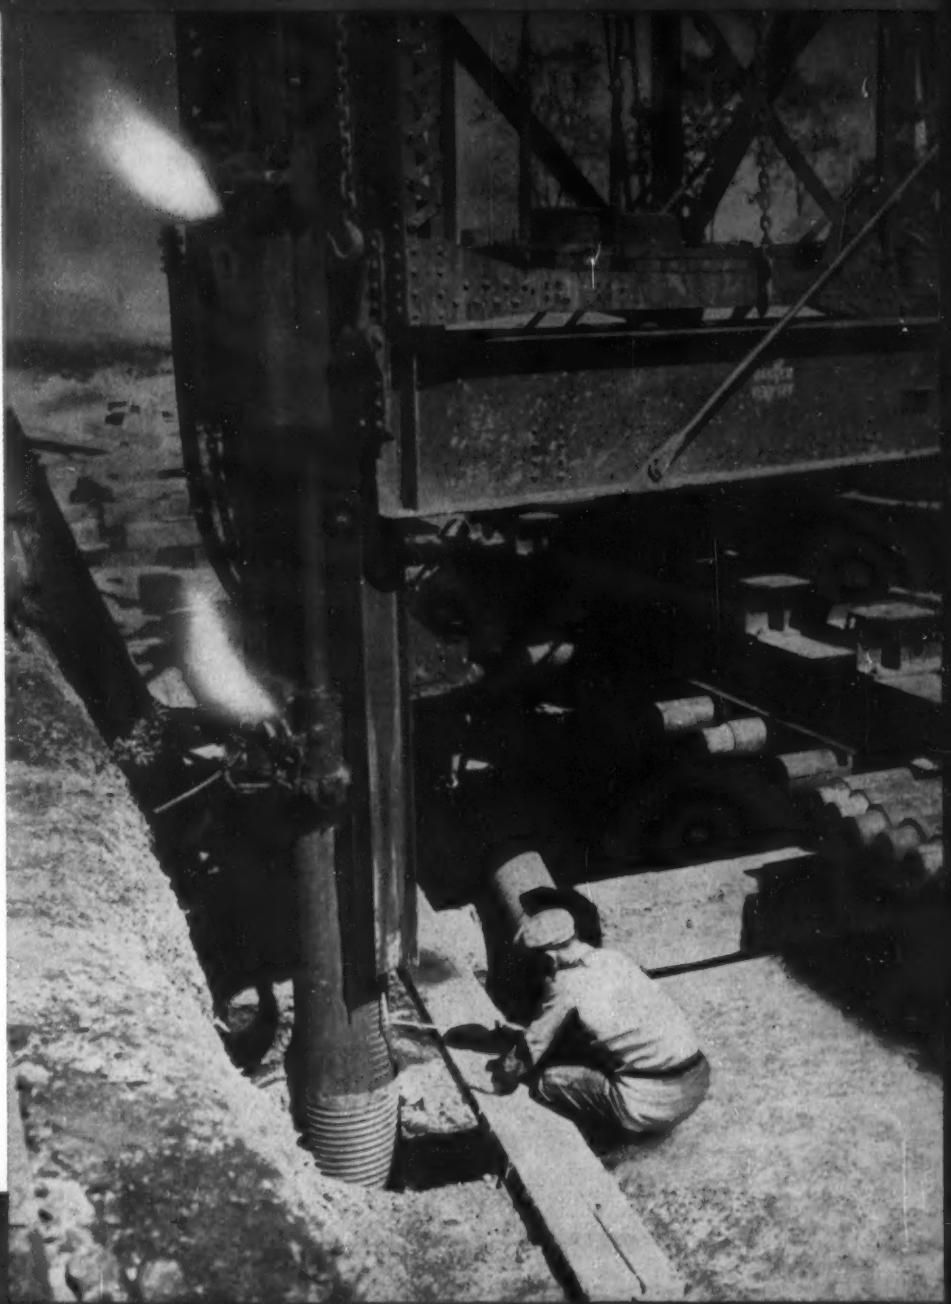

THE SCOPE OF RAYMOND'S ACTIVITIES

. . . Foundation Construction . . . Harbor and Waterfront Improvements . . . Soil Investigations . . . In-Place Pipe Lining . . . Specialized Construction

Raymond Concrete Pile Co.

140 CEDAR STREET • NEW YORK 6, N. Y.

Branch Offices in the Principal Cities of the United States and Central and South America

10-S—10 ton

15-S—15 ton

30-S—30 ton

60—60-ton

4 New DART Trucks

answering 4 Major Dump Haulage Needs . . .

DART EXCLUSIVES:
Box Girder Frame
Air-Suspension Front End
Extra-Long, 2-stage Springs
Forward Full Vision Cab
Side Mounted Engine
Triple Reduction Rear Axle with Quick Change Ratios
Same Size Tires Front & Rear

For information on any model, write

The trend and future design of heavy-duty trucks is clearly shown in DART'S 4 new models announced during 1953.

In addition to better *load distribution*, DART'S new truck design greatly increases *visibility* and *driver comfort*.

Greater *maneuverability*, due to shorter wheel bases is a big factor in hauling more tons per hour. Better *spring action*, front and rear, provides easier riding and adds to truck and tire service life.

These combined features are compelling reasons for seeing your DART Dealer for your truck needs.

51 YEARS OF BUILDING HEAVY DUTY TRUCKS

DART TONNAGE ENGINEERED TRUCKS
Kansas City 8, Missouri
SUBSIDIARY OF THE CARLISLE CORPORATION

At the A.E.D. . . . . You are invited to meet Dart representatives at the Barclay Hotel.